

ZW7100-200~400V

### Features:

- . All diffused structure
- . High current density
- . Very low forward voltage drop
- . Ceramic housing hermetic package
- . Ultra-low thermal resistance

### Electrical Characteristics And Ratings

#### Reverse Blocking

Device Type	V <sub>RRM</sub> (1)	V <sub>RSM</sub> (1)
ZW7100-02	200	300
ZW7100-04	400	450

V<sub>RRM</sub> = Repetitive peak reverse voltage  
 V<sub>RSM</sub> = Non repetitive peak reverse voltage (2)


Repetitive peak reverse leakage current	I <sub>RRM</sub>	15 mA 50 mA (3)
---	------------------	--------------------



Notes:

All ratings are specified for T<sub>j</sub>=25 °C, unless otherwise stated

- (1) Sine half wave, f=50Hz, T<sub>j</sub> = -40 to +170°C.
- (2) Sine half wave, Pulse width 10 msec. T<sub>j</sub> = -40 to +170°C.
- (3) Maximum value for T<sub>j</sub> = 170 °C.
- (4) See parameter definition below :

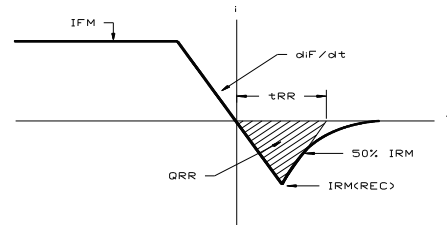

REVERSE RECOVERY CHARACTERISTIC

#### Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	I <sub>F(AV)</sub>		7100		A	Sinewave 180°, T <sub>c</sub> =85°C
RMS forward current	I <sub>FRMS</sub>		11200		A	
Peak one cycle surge (non repetitive) current	I <sub>FSM</sub>		55000		A	Pulse width 10 msec, sinusoidal wave-shape, 180° conduction, T <sub>j</sub> = 170 °C
I square t	I <sup>2</sup> t		15000		KA <sup>2</sup> s	Pulse width 10 msec, sinusoidal wave-shape, T <sub>j</sub> = 170 °C
Peak forward voltage	V <sub>FM</sub>		1.05		V	I <sub>FM</sub> = 5000A; 25°C
Threshold voltage	V <sub>TO</sub>		0.74		V	T <sub>j</sub> = 170 °C
Slope resistance	r <sub>T</sub>		0.026		mΩ	T <sub>j</sub> = 170 °C
Reverse Recovery Current (4)	I <sub>RM(REC)</sub>				A	I <sub>FM</sub> = 1000 A; dI <sub>F</sub> /dt = 10 A/μs;T <sub>j</sub> max
Reverse Recovery Charge (4)	Q <sub>rr</sub>				μC	I <sub>FM</sub> = 1000 A; dI <sub>F</sub> /dt = 10 A/μs;T <sub>j</sub> max
Reverse Recovery Time (4)	t <sub>rr</sub>				μs	I <sub>FM</sub> = 1000 A; dI <sub>F</sub> /dt = 10 A/μs;T <sub>j</sub> max

\* For guaranteed maximum values, contact factory

**Ehermal And Mechanical Characteristics**

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T <sub>j</sub>	-40	+170		°C	
Storage temperature	T <sub>stg</sub>	-40	+170		°C	
Thermal resistance - junction to case	R <sub>θ(j-c)</sub>		0.01		°C/W	Double sided cooled
Thermal resistance - junction to case	R <sub>θ(j-c)</sub>		0.02		°C/W	Single sided cooled
Thermal resistance -case to heatsink	R <sub>θ(cs)</sub>		0.005		°C/W	Double sided cooled
Creepage distance	D <sub>s</sub>		4		mm	
Air breakdown distance	D <sub>a</sub>		4		mm	
Mounting force	F			24	kN	
Weight	W			140	g	

\* Mounting surfaces smooth, flat and greaseless

**Case Outline And Dimensions**

