


Model description

35

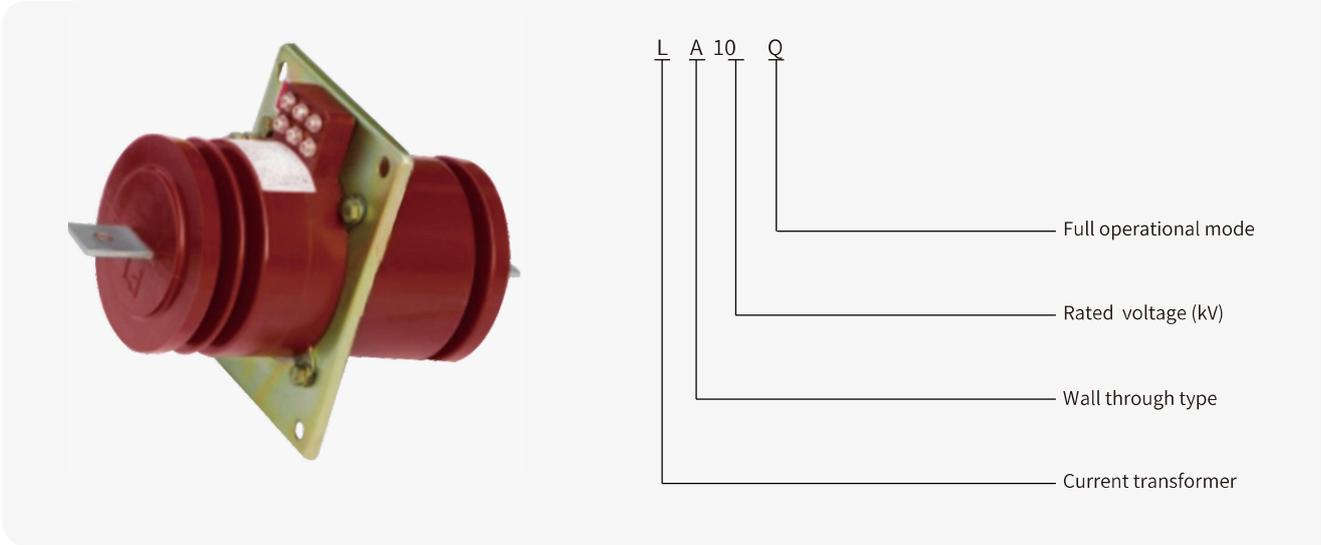

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)					1s thermal current (kA)	Rated dynamic current (kA)
		0.2S 0.5S	0.2	0.5	10P10	10P15		
5200	0.2(S)/10P10 0.5(S)/10P10	10	10	10	15	15	90	200
300、400			15	15			24.5	44
500			15	15			32	80
600			15	15			32	80
800-1000			15	15			63	100

Overall dimension drawing

