


Model description

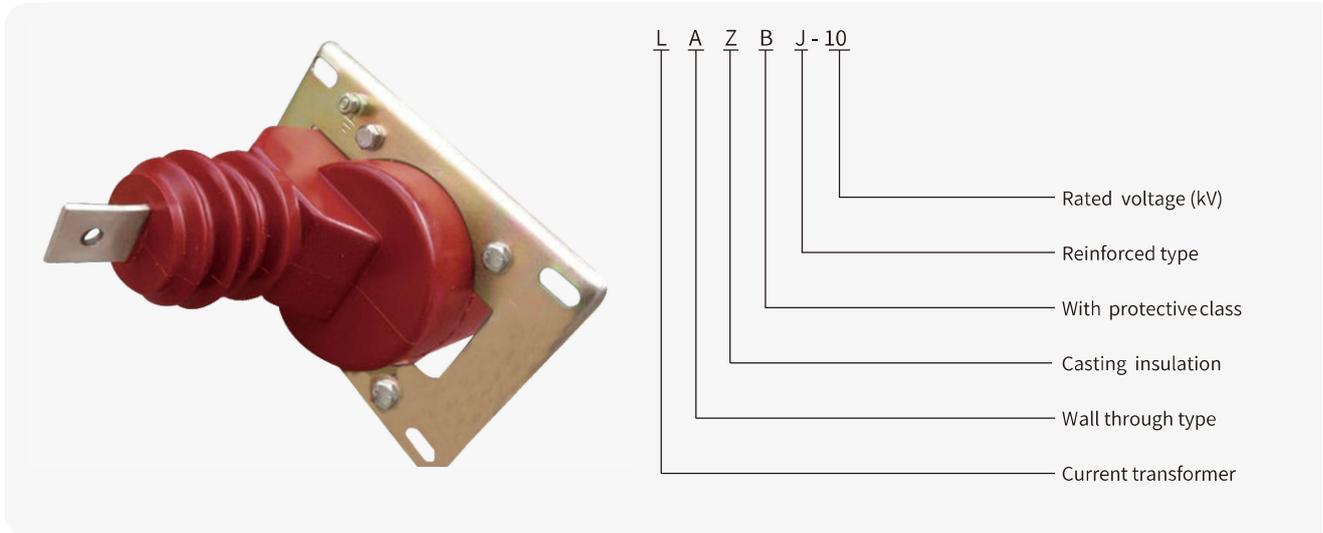

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)					1s thermal current (kA)	Rated dynamic current (kA)		
		0.2S	0.5S	0.2	0.5	10P10			10P15	
5-200	0.2(S)/10P10 0.5(S)/10P10 0.2(S)/10P15 0.5(S)/10P15	10		10	10	15	15	90	200	
300、400								24.5	44	
500								32	80	
600					15			15	32	80
800-1000									63	100

Overall dimension drawing

