


Model description

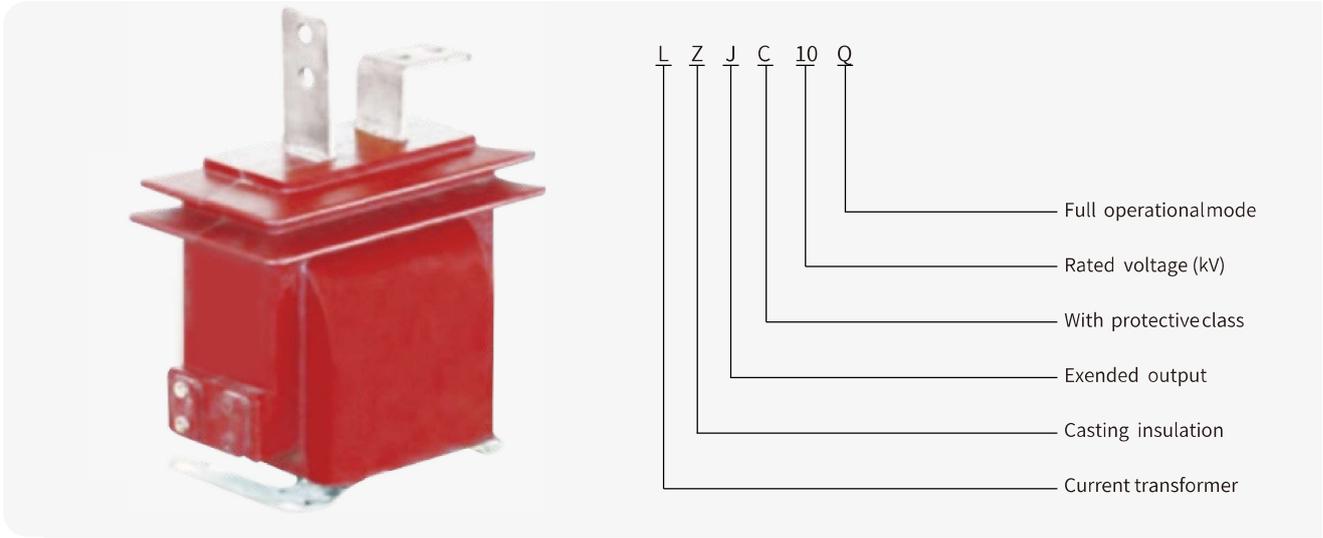

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)					1s thermal current (kA)	Rated dynamic current (kA)
		0.2S 0.5S	0.2	0.5	10P10	10P15		
5-40	0.2(S)/10P 0.5(S)/10P	10	10	10	15	15	90	220
50-400							100	250
500							50	100
600							56	110
800							75	110
1000							80	130

Overall dimension drawing

