


Model description

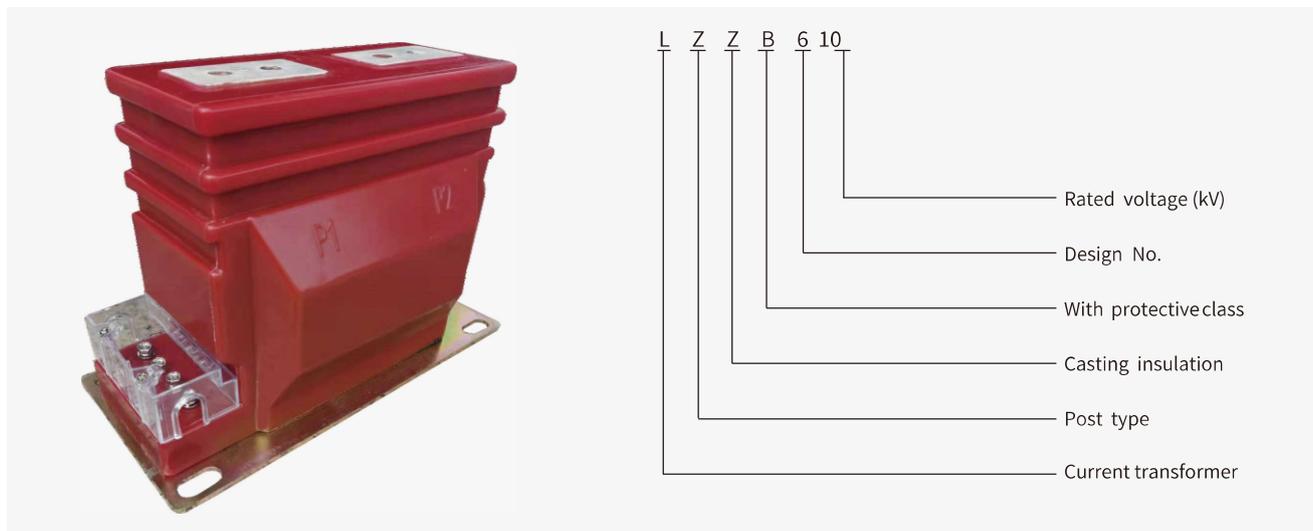

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)			1s thermal current (kA)	Rated dynamic current (kA)			
		0.2S	0.2(0.5)	10P					
5	0.2S/10P10 0.5S/10P10 0.2/10P10 0.5/10P10	10	10	15	0.9	2.25			
10					1.8	6.75			
15					2.7	5.6			
20					3.6	9			
25					4.5	11.25			
30					5.4	13.5			
40					7.2	18			
50					9	22.5			
75					13.5	33.75			
100					18	45			
150					27	66			
200					33	80			
300					45	90			
400					56	100			
500									
600									

Overall dimension drawing

