


Model description

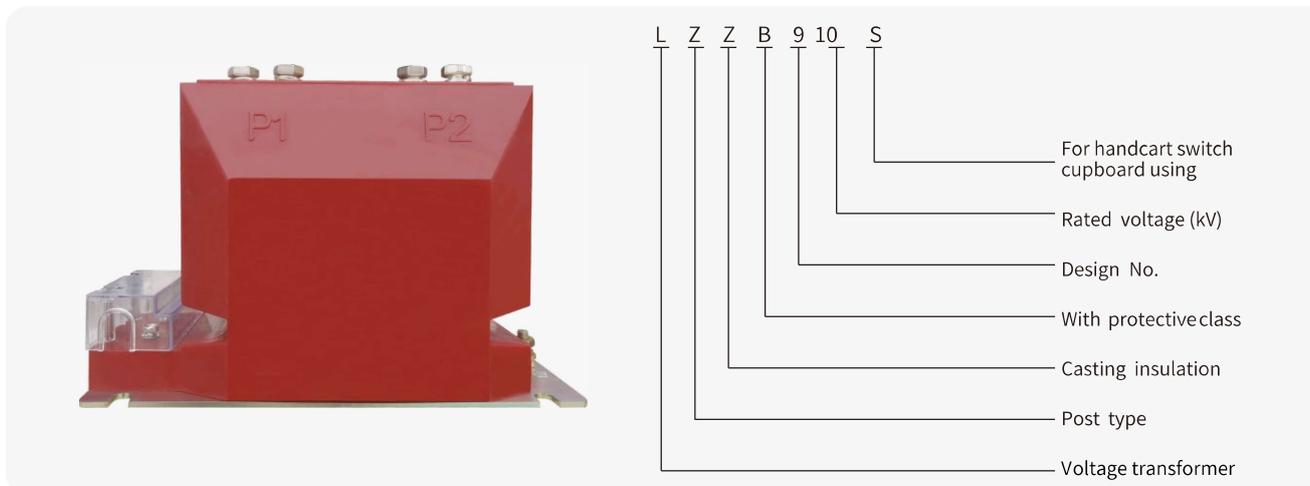

Technical data

Rated primary current(A)	Accuracy Combination	Rated secondary output (VA)		1s thermal current (kA)	Rated dynamic current (kA)		
		0.2S	0.2(0.5)				
5	0.2S 0.5S 0.2 0.5	10	10	0.9	2.25		
10				1.8	6.75		
15				2.7	5.6		
20				3.6	9		
25				4.5	11.25		
30				5.4	13.5		
40				7.2	18		
50				9	22.5		
75				13.5	33.75		
100				18	45		
150				27	66		
200				33	80		
300				45	90		
400				56	100		
500							
600							

Overall dimension drawing

