


**Model description**

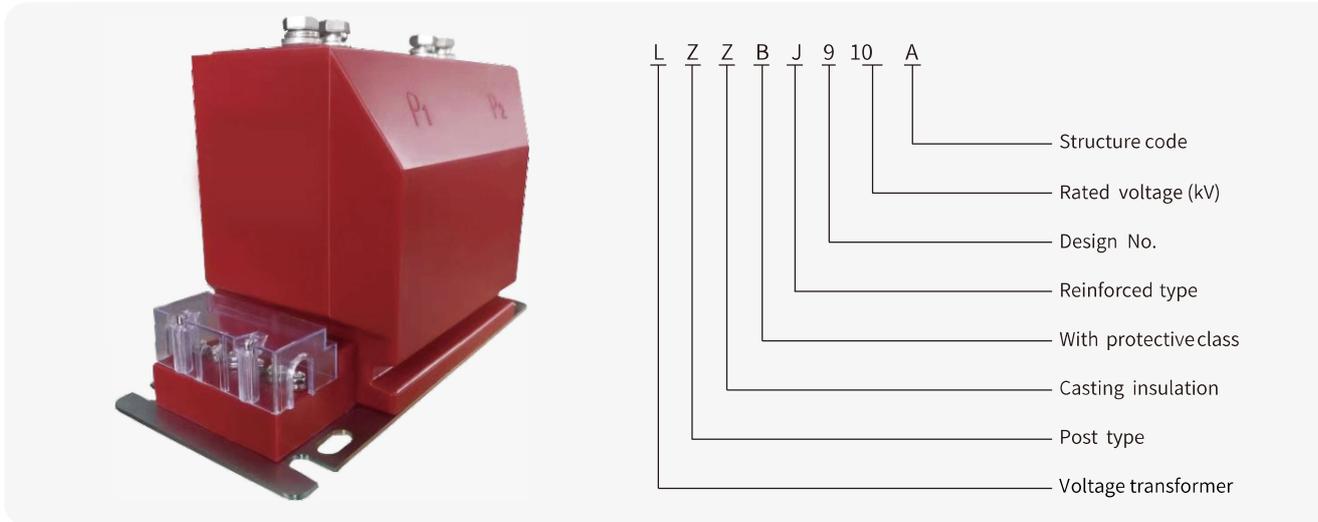

**Technical data**

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)			1s thermal current (kA)	Rated dynamic current (kA)
		0.2S(0.2)	0.5S(0.5)	10P10		
5	0.2S/10P10 0.5S/10P10 0.2/10P10 0.5/10P10	10	10	15	0.75	1.8
10					1.44	3.6
15					2	5
20					3	7.5
25					4	10
30					5	12.5
40					6.3	15
50					8.1	20
75					16.2	40.5
100					21.6	54
150					36	80
200					45	100
300						
400						
500						
600					63	130
800						
1000						
1200	80	160				
1500						
2000						
2500						
3000						

**Overall dimension drawing**

