


Model description

33

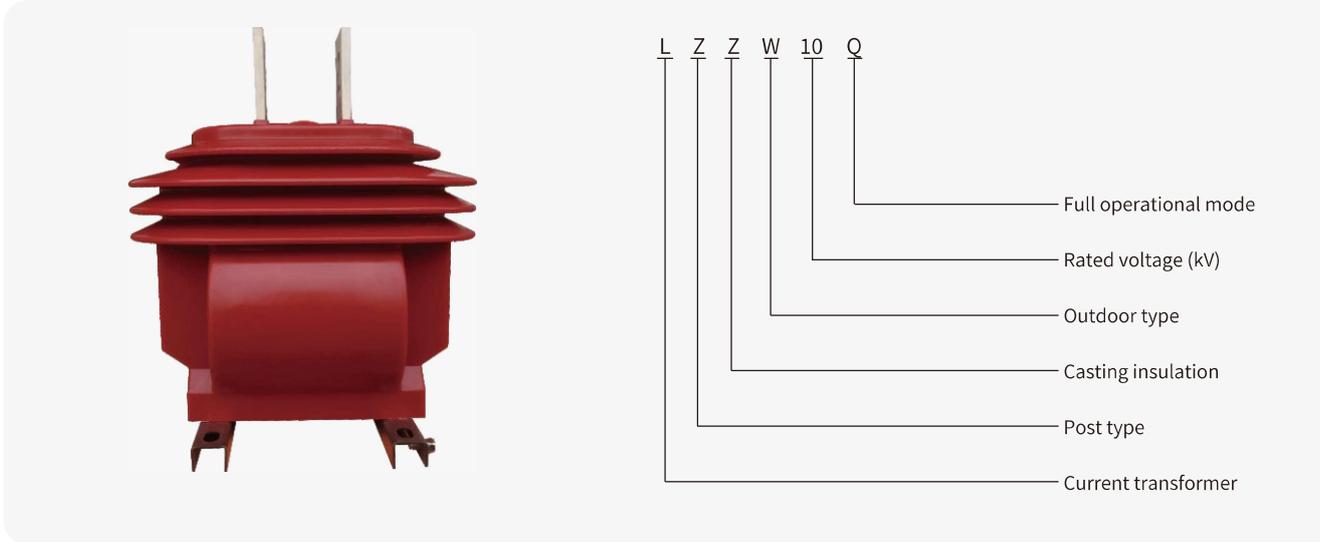

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)			1s thermal current (kA)	Rated dynamic current (kA)
		0.2(S)	0.5	10P15		
10	0.2(S)/10P15 0.5(S)/10P15 0.2(S)/0.5/10P15 0.2(S)/10P15/10P15	10	15	15	1.44	3.6
15					3	7.5
20、25					4	10
30					6.3	15
40、50					9	22.5
60					12.6	31.5
75					15	37.5
100					18	45
150					25	55
200					50	110
250-600					60	130
750-1000					80	160
1200-1500					100	160

Overall dimension drawing

