


**Model description**

13

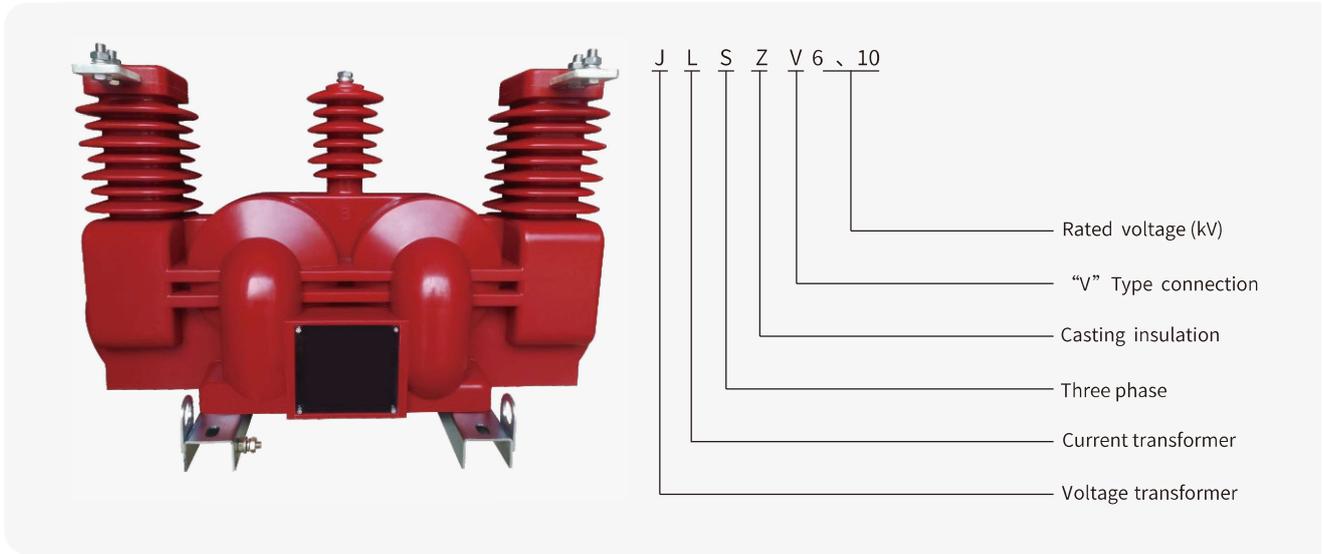

**Description**

JLSZV-10 integral casting high voltage dry type combined transformer (integral casting high voltage metering box) is improved on the basis of similar products. It is suitable for rated frequency of 50 Hz and rated voltage 10kV and below outdoor AC system for active and reactive energy measurement, which is the replacement of the old oiled metering products.

JLSZV-10 integral casting high voltage dry type combined transformer (integral casting high voltage metering box) is made of outdoor special epoxy resin vacuum casting with arc resistance, aging resistance and pollution resistance. The appearance of the umbrella skirt, surface creepage distance, rainproof, dust proof, corrosion resistant, is the ideal product of power grid measurement upgrade.

**Technical data**

Parameter of current part

Rated primary current (A)	Single Ratio	Rated secondary output (VA)			1s thermal current (kA)	Rated dynamic current (kA)
		0.2(S)	0.5S	0.5		
5-10-15	5	10	10	15	1.0	2.5
10-15-20	10				1.5	3.75
15-20-30	15				2.4	6.0
20-30-40	20 25				3.0	7.5
30-40-50	30				4.5	11
40-50-75	40				6.5	16.5
50-75-100	50				9	22.5
75-100-150	75				12	30
100-150-200	100				16	40
150-200-300	150				24	60
200-300-400	200 250	32	45	60	80	
300-400-500	300					
400-500-600	400					
500-600-800	500-1000	80	80	80	100	
600-800-1000						

Parameter of voltage part

Type	Rated voltage ratio (V)	Accuracy class Threephase rated secondary output (VA)	Max.output (VA)	Rated insulation level (kV)
JLSZV-6	6000/100	0.2-2×20 0.5-2×50 1-2×80	2×400	7.2/32/60
JLSZV-10	10000/100	3-2×200		12/42/75

**Overall dimension drawing**

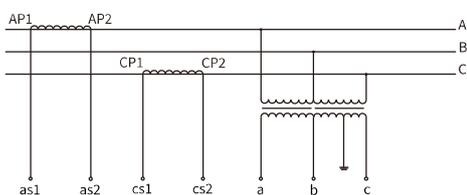
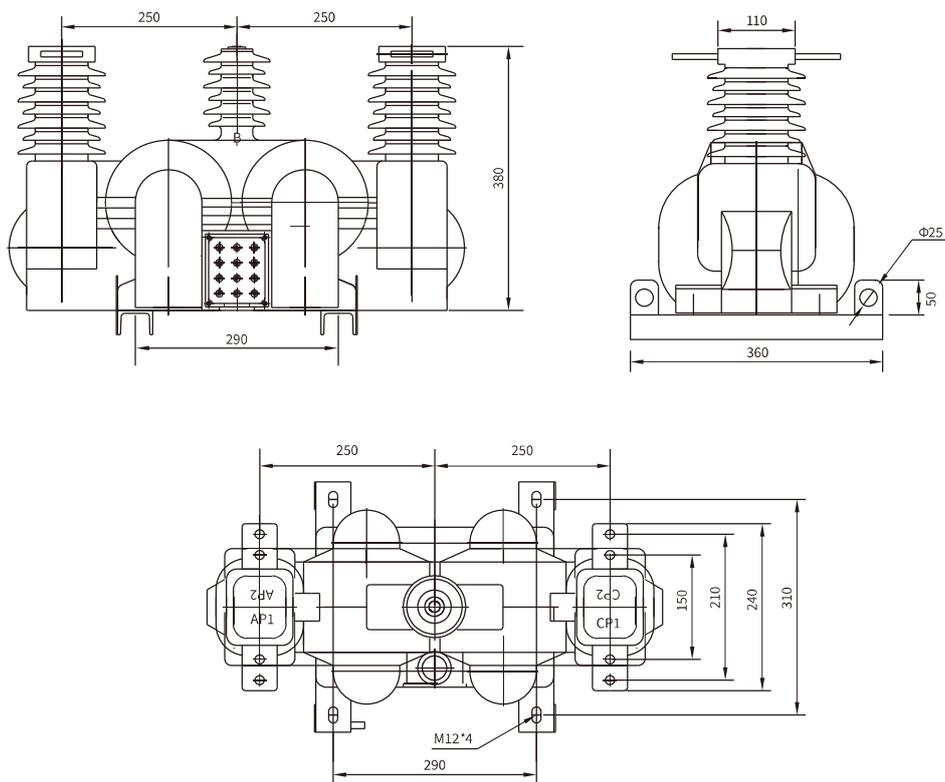


Figure1

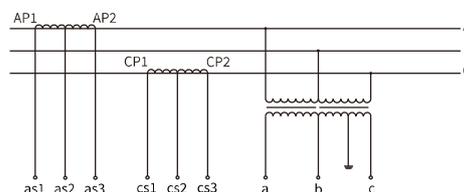


Figure2