

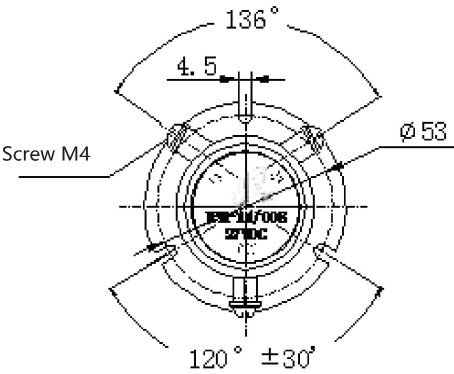


Product Specification		Units	GHR-11/008
Contact Form			C
Contact Arrangement			DPDT
Test Voltage,(kV, Peak), Test Max.,Contacts & to Base (15 $\mu$ A Leakage Max., dc or 60Hz)		KV Peak	20
Rated Operating Voltage,(kV, Peak), Contacts & to Base (15 $\mu$ A Leakage Max.)	DC or 60Hz	KV Peak	15
	2.5MHz	KV Peak	13
	16MHz	KV Peak	10
	32MHz	KV Peak	-
Continuous Current,Carry Max	DC or 60Hz	Amps	75
	2.5MHz	Amps	35
	16MHz	Amps	22
	32MHz	Amps	-
Coil Hi -Pot (V RMS, 60 Hz)		V	500
Capacitance	Across Open Contacts	pF	3
	Contacts to Ground	pF	3.5
Resistance, Contact Max @ 1A, 28Vdc		$\Omega$	0.005
Operate Time, Max		ms	30
Release Time, Max		ms	10
Operating Temperature Ambient		$^{\circ}$ C	-55~+125
Shock, 1/2 Sine11ms (Peak)		G' s	50
Vibration, Sine (10-2000 Hz Peak)		G' s	10
Mechanical Life		Cycles	1 million
Weight		g	380

COIL RATINGS	
Nominal, Volts dc	27
Pick-up, Volts dc,Max	16
Drop-Out, Volts dc,Min	1-10
Coil Resistance ( $\Omega \pm 10\%$ )	240
※ Ratings listed are for 25°C,sea level conditions	

※ Order the relay with the coil voltage in the part number as shown above. The coil voltage will appear on the coil plate near the coil terminals rather than in the P/N on the relay.

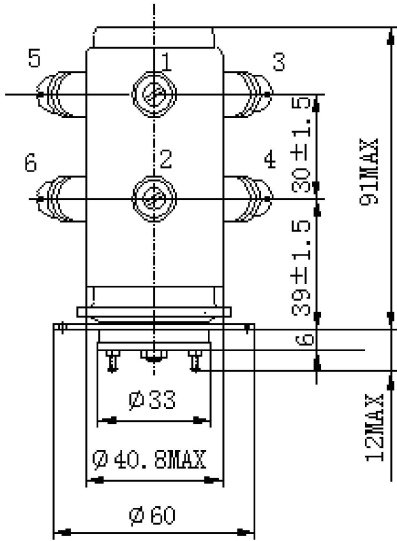

Technical Requirements  
Unspecified tolerance dimensions  
Grade IT13