


Model description

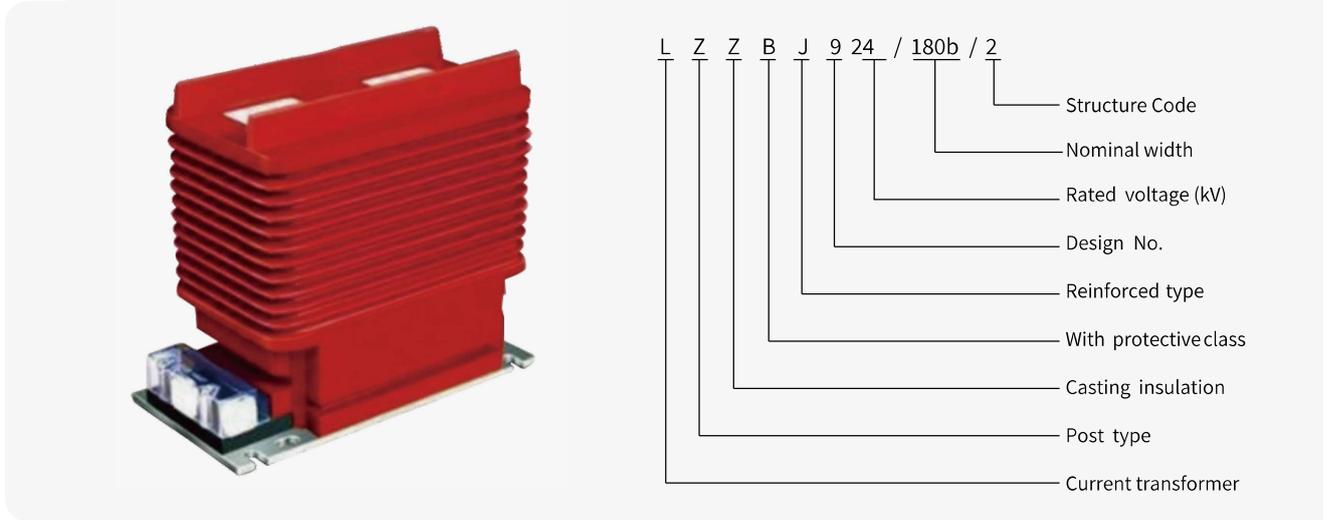

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)				1s thermal current (kA)	Rated dynamic current (kA)
		0.2(S)	0.5(S)	10P10	10P15		
5、150	0.2(S)/0.2 0.2(S)/0.5 0.2(S)/10P10 0.5(S)/10P10 0.2(S)/10P15 0.5(S)/10P15	10	10	20	15	150	375
200						31.5	80
300、500		45	112.5				
600、800		10	15	30	20	63	130
1000、1200						80	160
1500、2500		20	30	30	20	100	160

Overall dimension drawing

