


**Model description**

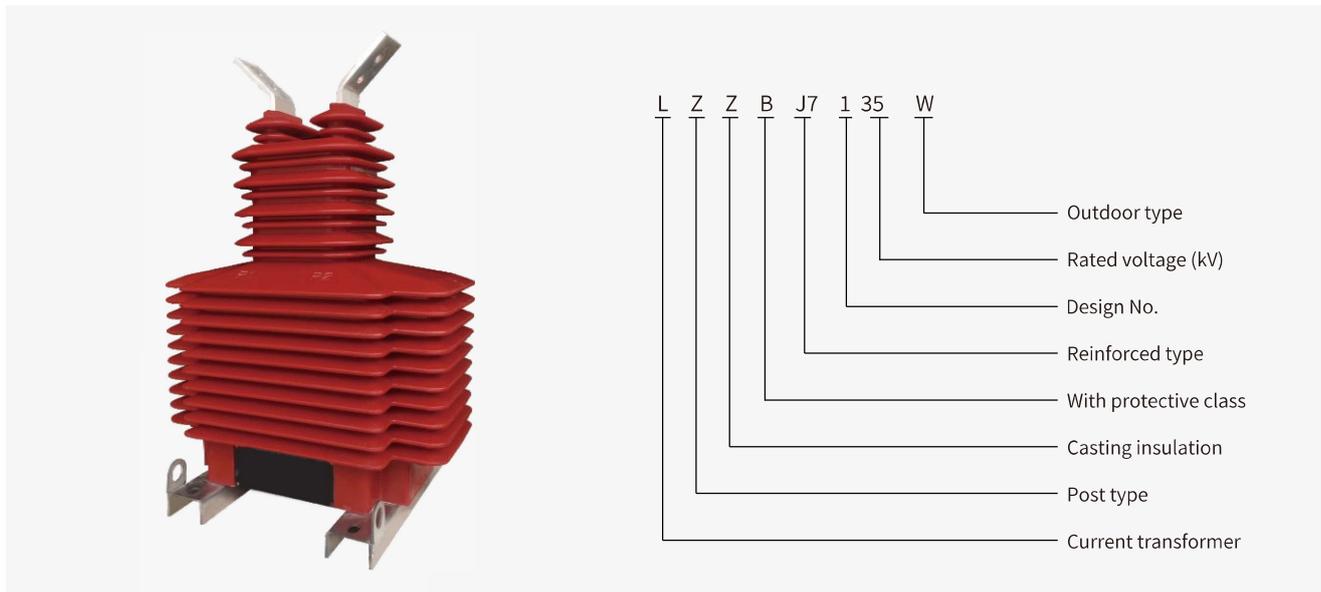

**Technical data**

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)							1s thermal current (kA)	Rated dynamic current (kA)
		0.2S	0.5S	0.2	0.5	5P10	5P15	5P20		
10	0.2(S)/0.2(S) 0.2(S)/0.5(S) 0.2(S)/5P 0.5(S)/5P 5P/5P	10	10	15	30	50	30	20	1.44	3.6
15									2.1/2	5.25
25、30									2.82/2	7.1
30100									150/2	375/2
150	0.2(S)/0.2(S)/5P 0.2(S)/0.5(S)/5P 0.2(S)/5P/5P	15	15	30	50	40	50	30	31.5	80
200、250									31.5/2	80
300、500									31.5/3	80
600、800	0.5(S)/5P/5P	15	15	30	50	50	50	30	31.5/4	80
1000、3150									40/4	100

**Overall dimension drawing**

