


**Model description**

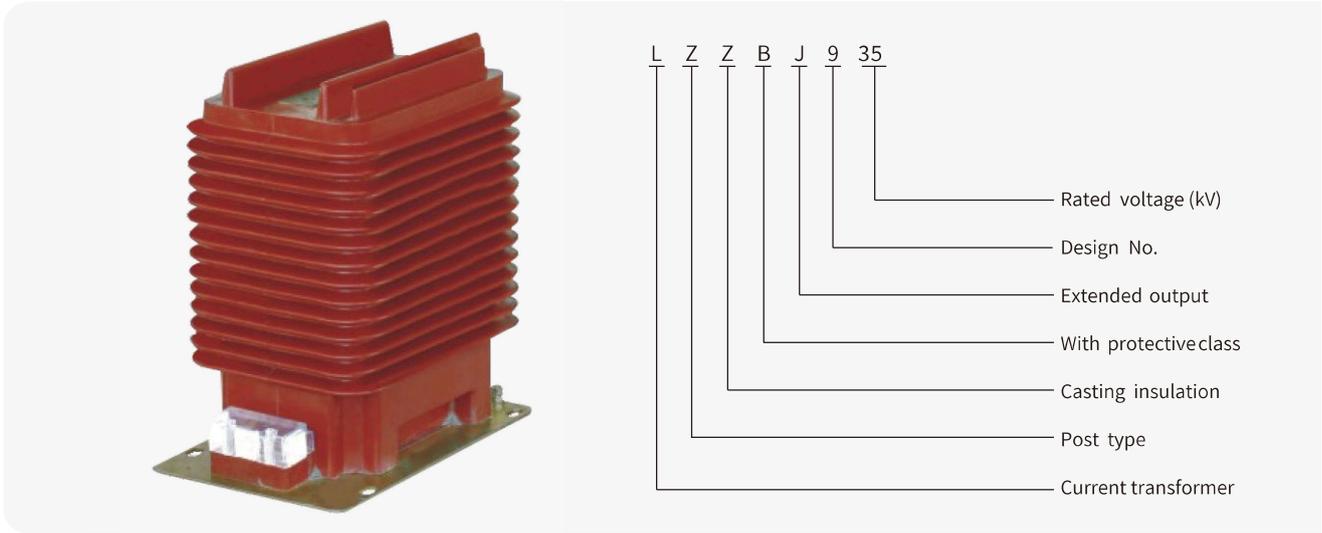

**Technical data**

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)				1s thermal current (kA)	Rated dynamic current (kA)
		0.2(S)	0.5(S)	10P10	10P15		
5、150	0.2(S)/0.2 0.2(S)/0.5	10	10	20	15	150	375
200						31.5	80
300、500	0.2(S)/10P10 0.5(S)/10P15	10	15	30	20	45	112.5
600、800						63	130
1000、1200	0.2(S)/10P15 0.5(S)/10P15	20	30	30	20	80	160
1500、2500						100	160

**Overall dimension drawing**

