


Model description

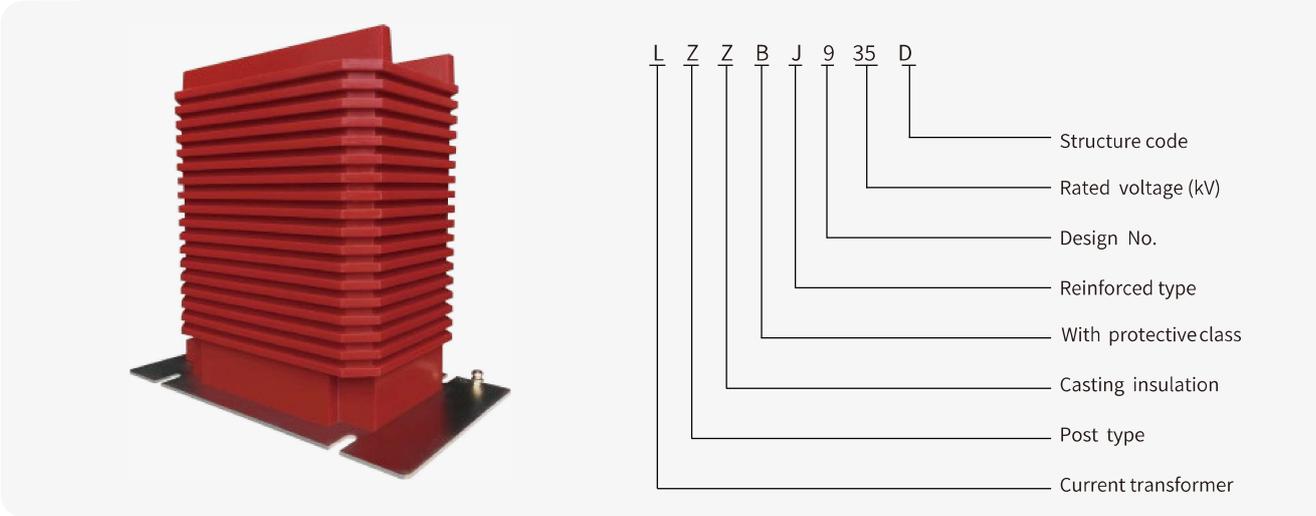

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)							1s thermal current (kA)	Rated dynamic current (kA)
		0.2S	0.5S	0.2	0.5	5P10	10P10	15P10		
10	0.2(S)/0.2(S) 0.2(S)/0.5(S) 0.2(S)/5P 0.5(S)/5P 5P/5P 0.2(S)/0.2(S)/5P 0.2(S)/0.5(S)/5P 0.2(S)/5P/5P 0.5(S)/5P/5P	10	10	15	30	50	30	20	1.44	3.6
15									2.1/2	5.25
25 30									2.82/2	7.1
30、100									150/2	375/2
150									31.5	80
200、250									31.5/2	80
300、500									31.5/3	80
600、800									31.5/4	80
1000、3150		15	15	30	50	50	40	50	30	40/4

Overall dimension drawing

