

Features

- Double circuit type of limit switch
- High mechanical strength, consists of intensive plastic and aluminum cast
- Small size, water-proof and oil-proof construction
- Built-in contact box has double-spring and long mechanical life
- Smooth operation with larger over travel distance
- Conduit design for convenient cabling
- Various actuators for different applications

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	5	5	1.5	0.7	3	3	2	1
250VAC	5	5	1	0.5	3	3	1.5	0.8
8VDC	5	5	3	3	5	4	3	3
14VDC	5	5	3	3	4	4	3	3
30VDC	5	5	3	3	4	4	3	3
125VDC	0.4	0.4						
250VDC	0.2	0.2						
Inrush Current	N.C: below 24A, N.O: below 12A							

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec. max.(DC).
2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications

Operation speed	5mm-0.5m/s
Operating frequency	Electrical: 30 operations/min
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ min. (below 500VDC)
Dielectric strength	1000VAC, 50/60 Hz for 1 minute between terminals of the same polarity
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	Using: -20~+70℃ (With no icing)
Humidity	<95% RH
Electrical life	500,000 operations above
Degree of protection	IP65


Operating Characteristics

Model	TZ-8	TZ-8104 TZ-8105	TZ-8108 TZ-8109	TZ-8107	TZ-8111	TZ-8112/8122	TZ-8166/8167/8168/8169
Operating force	OF(Max.)	750g	750g	750g	900g	900g	150g
Release force	RF(Min.)	100g	100g	100g	150g	150g	-
Pre-travel	PT(Max.)	20°	20°	20°	1.5mm	1.5mm	30mm
Over travel	OT(Min.)	50°	50°	50°	4mm	4mm	-
Movement differential	MD(Max.)	12°	12°	12°	1mm	1mm	-
Operating position	OP(mm.)	-	-	-	26 ± 0.8mm	37 ± 0.8mm	-




Appearance and Dimension


TZ-8104




TZ-8105




TZ-8107




TZ-8108




TZ-8109




TZ-8111




TZ-8112




TZ-8122




TZ-8166




TZ-8167



TZ-8168




TZ-8169



Features

- Double circuit type of limit switch
- High mechanical strength, consists of intensive plastic and aluminum cast
- Small size, water-proof and oil proof construction
- Built-in contact box has double-spring and long mechanical life
- Smooth operation with larger over travel distance
- Various actuators for different application
- Optimize tail line design to improve sealing performance

Contact Form




Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	5	5	1.5	0.7	3	3	2	1
250VAC	5	5	1	0.5	3	3	1.5	0.8
8VDC	5	5	3	3	5	4	3	3
14VDC	5	5	3	3	4	4	3	3
30VDC	5	5	3	3	4	4	3	3
125VDC	0.4	0.4						
250VDC	0.2	0.2						
Inrush Current	N.C: below 24A, N.O: below 12A							

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec. max.(DC).
2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications

Operation speed	5mm-0.5m/s
Operating frequency	Electical: 30 operations/min
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ min. (below 500VDC)
Dielectric strength	1000VAC, 50/60 Hz for 1 minute between terminals of the same polarity
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	Using: -20~+70℃ (With no icing)
Humidity	<95% RH
Electrical life	500,000 operations above
Degree of protection	IP65

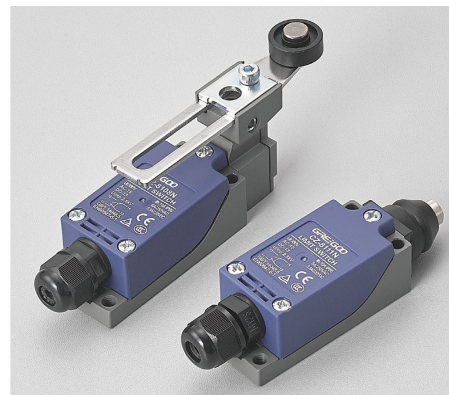


Operating Characteristics


Model	CZ-8 □ N	CZ-8104N CZ-8105N	CZ-8108N CZ-8109N	CZ-8107N	CZ-8111N	CZ-8112N CZ-8122N	CZ-8166N/8167N/8168N/8169N
Operating force	OF(Max.)	750g	750g	750g	900g	900g	150g
Release force	RF(Min.)	100g	100g	100g	150g	150g	-
Pre-travel	PT(Max.)	20°	20°	20°	1.5mm	1.5mm	30mm
Over travel	OT(Min.)	50°	50°	50°	4mm	4mm	-
Movement differential	MD(Max.)	12°	12°	12°	1mm	1mm	-
Operating position	OP(mm.)	-	-	-	26 ± 0.8mm	37 ± 0.8mm	-

Appearance and Dimension


CZ-8104N




CZ-8105N




CZ-8107N




CZ-8108N




CZ-8109N




CZ-8111N




CZ-8112N




CZ-8122N




CZ-8166N




CZ-8167N



CZ-8168N




CZ-8169N



Features

- Double-circuit type of limit switch
- High mechanical strength, mainly consists of aluminum cast
- Water-proof and oil-proof construction
- Various actuators for different applications
- Built-in contact box with double spring mechanism, longer mechanical life

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	10		3	1.5	10		5	2.0
250VAC	5		2	1	5		3	1.0
480VAC	3		1.5	0.8	3		1.5	0.8
600VAC	1		1	0.5	1.5		1	0.5
8VDC	10		6	3	10		6	
14VDC	10		6	3	10		6	
30VDC	6		4	3	6		4	
125VDC	0.8		0.2	0.2	0.8		0.2	
250VDC	0.4		0.1	0.1	0.4		0.1	

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec. max.(DC).
2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications

Operation speed	1mm-1m/s
Operating frequency	Electrical: 30 operations/min
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ min. (below 500VDC)
Dielectric strength	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	Using: -20~+80°C (With no icing)
Humidity	<95% RH
Electrical life	500,000 operations above
Protection level	IP66

NOTES: The default size of conduit connector is M20x1.5, outfitting cable connector. Conduit connector size is PG13.5, with product model number plus (-P), example: CWLCA2-2-P.


Operating Characteristics

Model	CWL	CWLCA2-2	CWLDD2	CWLNJ	CWLNJ-S2	CWLCA12-2-Q CWLCA12-2-QD	CWLCL	CWLCA32-41 CWLCA32-42	CWLDD	CWLNJ-2	CWLNJ-30	CWLDD1	CWLDD3
Operating Force	OF(Max.)	1360g	2720g	150g	29g	1360g	142g	1200g	2720g	120g	80g	2720g	2720g
Release Force	RF(Min.)	227g	910g	-	-	227g	28g	-	910g	-	-	910g	910g
Pre-Travel	PT(Max.)	20°	1.7mm	28mm	28mm	20°	20°	55°	1.7mm	28mm	28mm	1.7mm	1.7mm
Over Travel	OT(Min.)	30°	5.6mm	-	-	30°	30°	35°	6.4mm	-	-	5.6mm	5.6mm
Movement Differential	MD(Max.)	12°	1mm	-	-	12°	12°	-	1mm	-	-	1mm	1mm
Total Force	TF(Max.)	2720g	-	-	-	2720g	200g	-	-	-	-	2720g	2720g
Total Travel	TT(Min.)	50°	6.5 ± 0.8mm	-	-	50°	50°	OP:90 ± 10°	OP:34 ± 2.8mm	-	-	6.5 ± 0.8mm	9 ± 0.8mm




Appearance and Dimension

CWLCA2-2




Optional plastic idler wheel

CWLCA12-2-Q




Optional plastic idler wheel


CWLCL

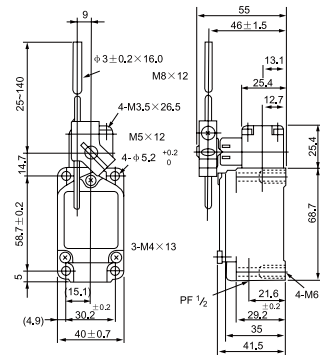


CWLD

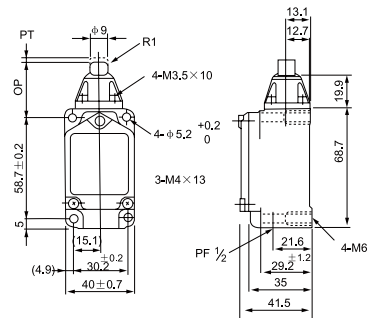


CWLD1

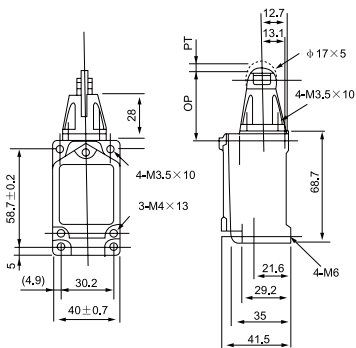


CWLD2

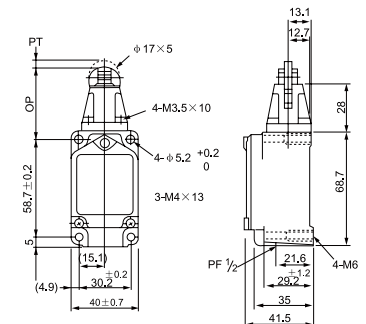

CWLD3

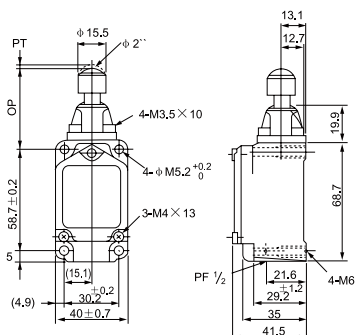


CWLCA12-2-QD

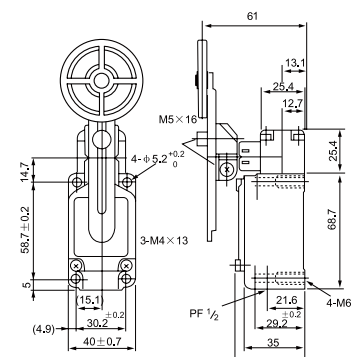


Appearance and Dimension


CWLNJ

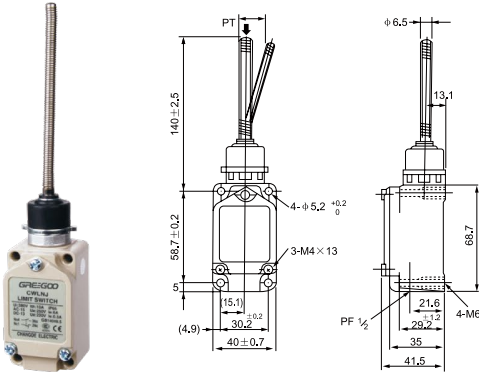


CWLNJ-30

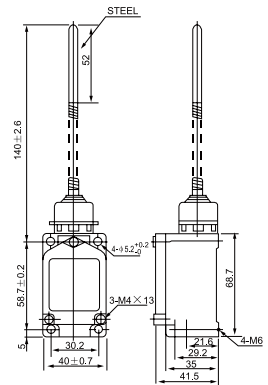


CWLNJ-2

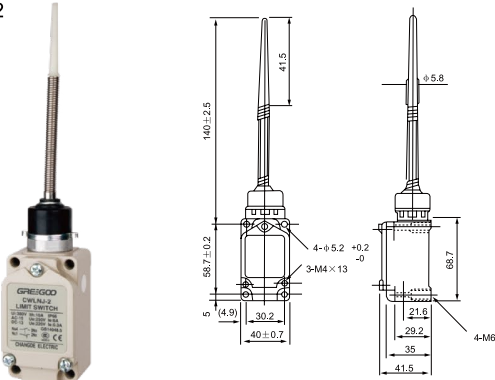


CWLNJ-S2

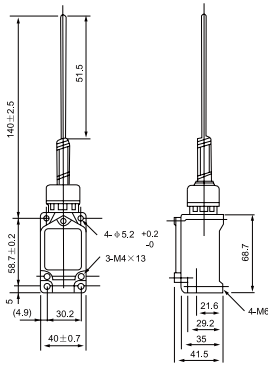


CWLCA32-41

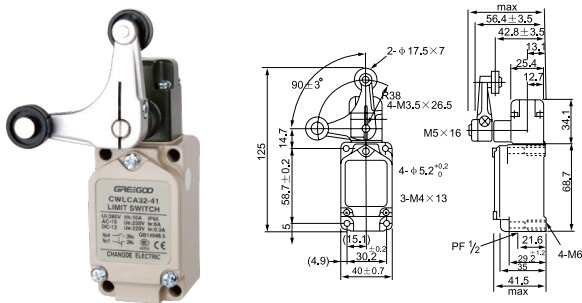


CWLCA32-41/M

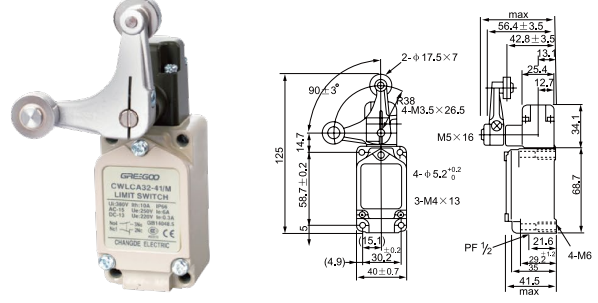

CWLCA32-42

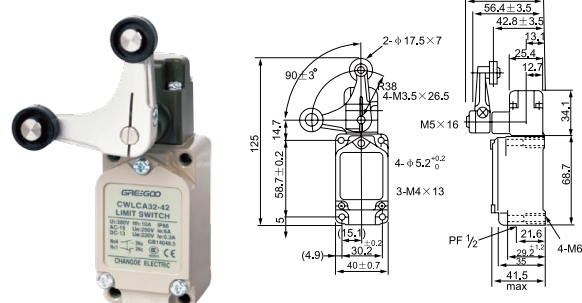


CWLCA32-42/M

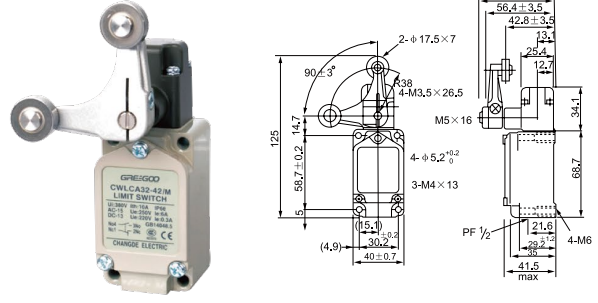

Features

- Various actuators for different applications
- Conduit design for convenient cabling
- Metal shell with high mechanical strength
- Built-in contact box has double-spring and long mechanical life

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	5	5	1.5	0.7	3	3	2	1
250VAC	5	5	1	0.5	3	3	1.5	0.8
8VDC	5	5	3	3	5	4	3	3
14VDC	5	5	3	3	4	4	3	3
30VDC	5	5	3	3	4	4	3	3
125VDC	0.4	0.4						
250VDC	0.2	0.2						
Inrush Current	N.C: below 24A, N.O: below 12A							


NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec. max.(DC).
2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications

Operation speed	5mm-0.5m/s
Operating frequency	Electrical: 30 operations/min
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ min. (below 500VDC)
Dielectric strength	1000VAC, 50/60 Hz for 1 minute between terminals of the same polarity
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	Using: -20~+70℃ (With no icing)
Humidity	<95% RH
Electrical life	500,000 operations above
Protection level	IP65

Operating Characteristics

Model	CHL	CHL-5000	CHL-5030	CHL-5050	CHL-5100	CHL-5200	CHL-5220	CHL-5300	CHL-5330	CHL-5381	CHL-5391
Operating force	OF (Max.)	750g	750g	750g	750g	900g	900g	150g	150g	150g	550g
Release force	RF (Min.)	100g	100g	100g	200g	200g	200g	30g	30g	30g	100g
Pre-travel	PT (Max.)	20°	20°	20°	1.8mm	1.8mm	1.8mm	30mm	30mm	30mm	20°
Tripping position	TP ± 10%	22.5°	22.5°	22.5°	2.0mm	2.0mm	2.0mm	22.5°	22.5°	22.5°	22.5°
Movement differential	MD (Max.)	10°	10°	10°	1.2mm	1.2mm	1.2mm	14°	14°	14°	14°
Over travel	OT (Min.)	75°	75°	75°	4.0mm	4.0mm	4.0mm	20mm	20mm	20mm	75°
Total travel	TT (Min.)	95°	95°	95°	5.8mm	5.8mm	5.8mm	50mm	50mm	50mm	95°

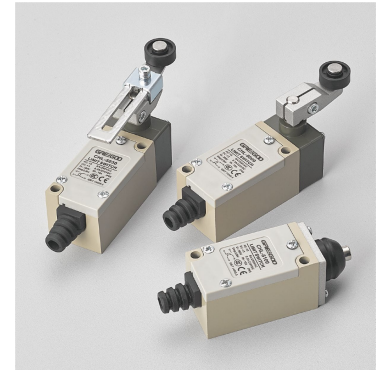


Appearance and Dimension

CHL-5000




Optional metal idler wheel

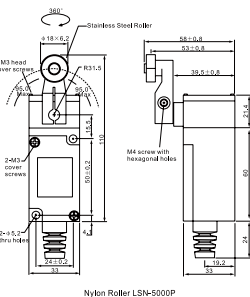

Nylon Roller LSN-5000P

CHL-5220

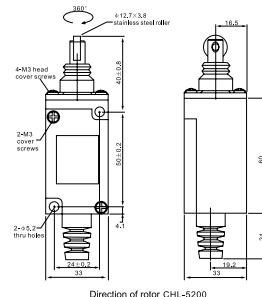


Direction of rotor CHL-5220


CHL-5030




Optional metal idler wheel

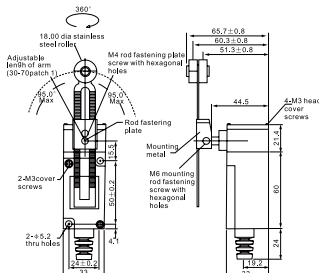


CHL-5300

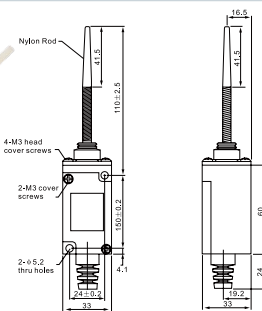


CHL-5050




CHL-5330




CHL-5100



CHL-5381




CHL-5200

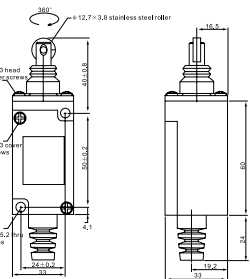

Direction of rotor CHL-5220


CHL-5391



Features

- Double circuit type of limit switch
- High mechanical strength, consists of intensive plastic and aluminum cast
- Water-proof and oil proof construction
- Built-in contact box has double-spring and long mechanical life
- Smooth operation with larger over travel distance
- Various actuators for different application

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	5	5	1.5	0.7	3	3	2	1
250VAC	5	5	1	0.5	3	3	1.5	0.8
8VDC	5	5	3	3	5	4	3	3
14VDC	5	5	3	3	4	4	3	3
30VDC	5	5	3	3	4	4	3	3
125VDC	0.4	0.4						
250VDC	0.2	0.2						
Inrush Current	N.C: below 24A, N.O: below 12A							

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec. max.(DC).
 2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
 3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications

Operation speed	5mm-0.5m/s
Operating frequency	Electrical: 30 operations/min
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ min. (below 500VDC)
Dielectric strength	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	Using: -20~+70°C (With no icing)
Humidity	<95% RH
Electrical life	500,000 operations above
Protection level	IP66

NOTES: The default size of conduit connector is M18x1.5. Conduit connector size is PG11.5, with product model number plus (-P), example: CSA-012-P.


Operating Characteristics

Model	CSA	CSA-001	CSA-003	CSA-012	CSA-021 CSA-021M	CSA-041	CSA-031 CSA-031M	CSA-051	CSA-061	CSA-071	CSA-081
Operating force	OF (Max.)	800g	800g	800g	400g	400g	400g	400g	150g	150g	150g
Release force	RF (Min.)	400g	400g	400g	100g	100g	100g	100g	50g	50g	50g
Pre-travel	PT (Max.)	1.8mm	1.8mm	1.8mm	20°	20°	20°	20°	30mm	30mm	30mm
Tripping position	TP ± 10%	2.0mm	2.0mm	2.0mm	22.5°	22.5°	22.5°	22.5°	22.5°	22.5°	22.5°
Movement differential	MD (Max.)	1.2mm	1.2mm	1.2mm	10°	10°	10°	10°	14°	14°	14°
Over travel	OT (Min.)	4.0mm	4.0mm	4.0mm	75°	75°	75°	75°	20mm	20mm	20mm
Total travel	TT (Min.)	5.8mm	5.8mm	5.8mm	95°	95°	95°	95°	50mm	50mm	50mm
Rotary indexing					22.5°	22.5°	22.5°	22.5°			




Appearance and Dimension


CSA-001

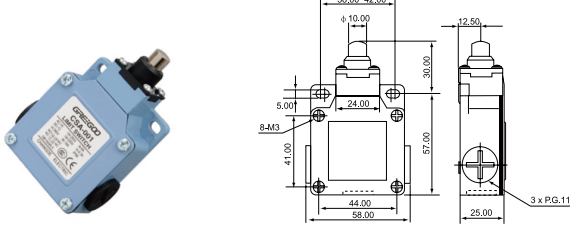


CSA-003

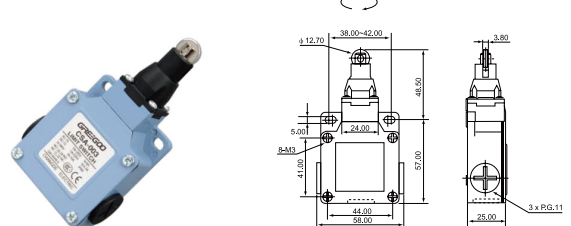


CSA-021

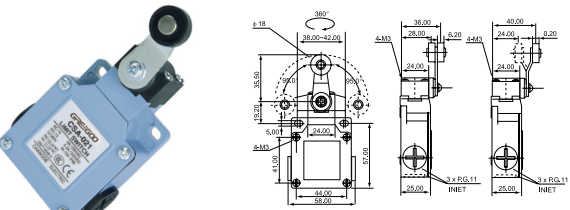


CSA-021M

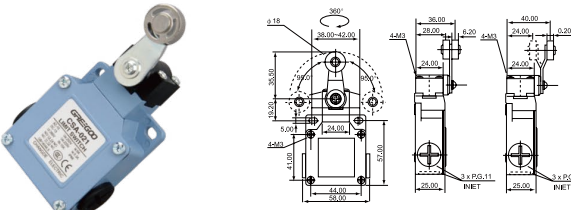


CSA-031

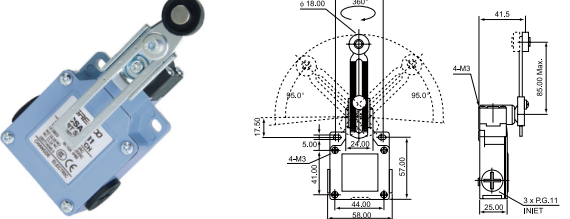


CSA-031M

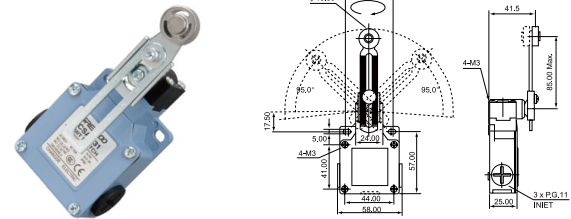


CSA-012

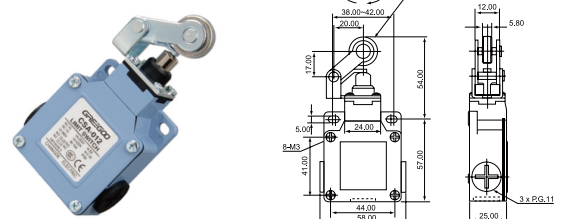


CSA-041

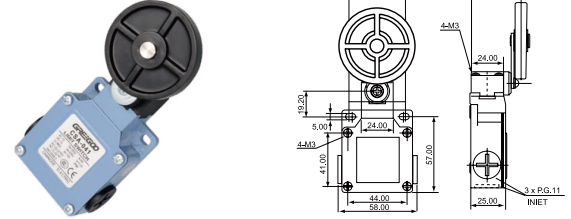


CSA-051

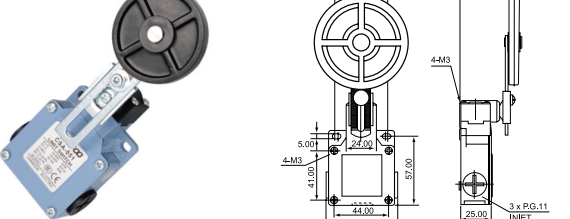


CSA-061

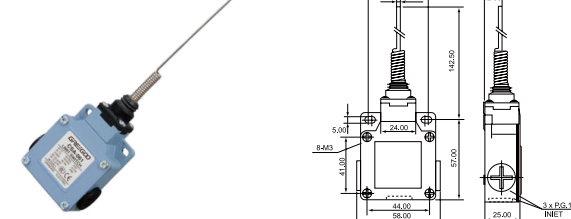

CSA-071

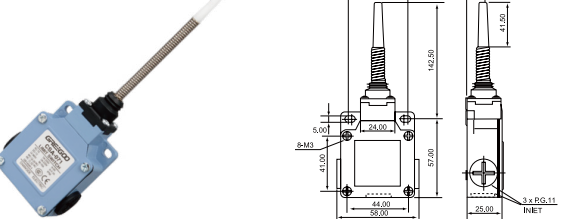


CSA-081

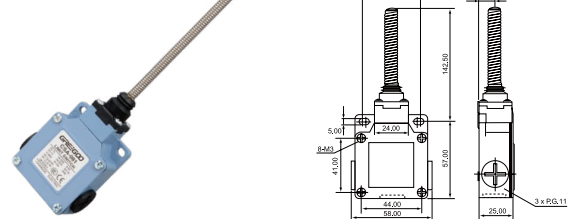

Features

- Double circuit type of limit switch
- Economic plastic type of limit switch
- Small size, water-proof and oil-proof construction
- Built-in contact box has double-spring and long mechanical life
- Smooth operation with larger over travel distance
- Various actuators for different applications

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	5	5	1.5	0.7	3	3	2	1
250VAC	5	5	1	0.5	3	3	1.5	0.8
8VDC	5	5	3	3	5	4	3	3
14VDC	5	5	3	3	4	4	3	3
30VDC	5	5	3	3	4	4	3	3
125VDC	0.4	0.4						
250VDC	0.2	0.2						
Inrush Current	N.C: below 24A, N.O: below 12A							

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec. max.(DC).
2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications

Operation speed	5mm-0.5m/s
Operating frequency	Electical: 30 operations/min
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ min. (below 500VDC)
Dielectric strength	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	Using: -20~+70℃ (With no icing)
Humidity	<95% RH
Electrical life	500,000 operations above
Protection level	IP66

NOTES: The default size of conduit connector is M20x1.5, outfitting cable connector. Conduit connector size is PG13.5, with product model number plus (-P), example: CLS-103-P.


Operating Characteristics

Model	CLS	101 301	102/103 302/303	111 311	121/121M 321/321M	127 327	131/131M 331/331M	161 361	171 371	181 381	191 391
Operating force	OF (Max.)	700g	700g	700g	500g	700g	500g	100g	100g	100g	500g
Release force	RF (Min.)	200g	200g	200g	100g	200g	100g	40g	40g	40g	100g
Pre-travel	PT (Max.)	1.8mm	1.8mm	1.8mm	20°	1.8mm	20°	30mm	30mm	30mm	20°
Tripping position	TP ± 10%	2.0mm	2.0mm	2.0mm	22.5°	2.0mm	22.5°	22.5°	22.5°	22.5°	22.5°
Movement differential	MD(Max.)	1.2mm	1.2mm	1.2mm	10°	1.2mm	10°	14°	14°	14°	10°
Over travel	OT (Min.)	4.0mm	4.0mm	4.0mm	75°	4.0mm	75°	20mm	20mm	20mm	75°
Total travel	TT (Min.)	5.8mm	5.8mm	5.8mm	95°	5.8mm	95°	50mm	50mm	50mm	95°
Rotary indexing					22.5°		22.5°				22.5°




Appearance and Dimension


CLS-101




CLS-102




CLS-103




CLS-111




CLS-112




CLS-127




CLS-121




CLS-121M



CLS-131




CLS-131M

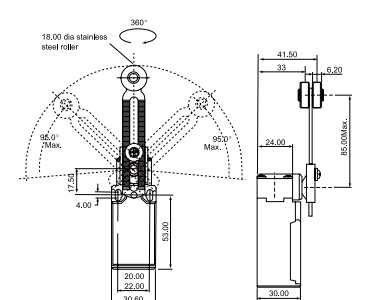


Appearance and Dimension


CLS-161

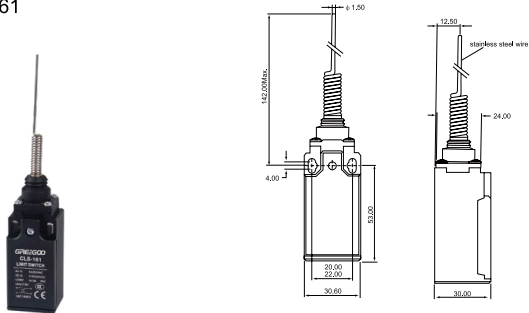


CLS-171

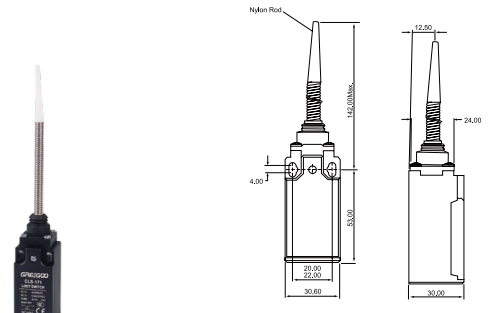

CLS-181

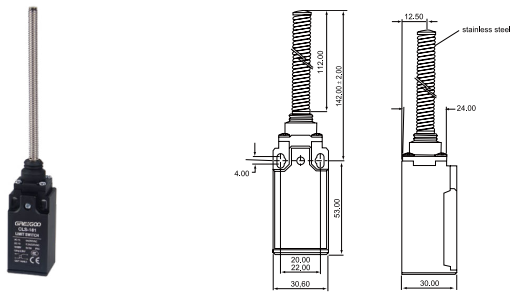


CLS-191

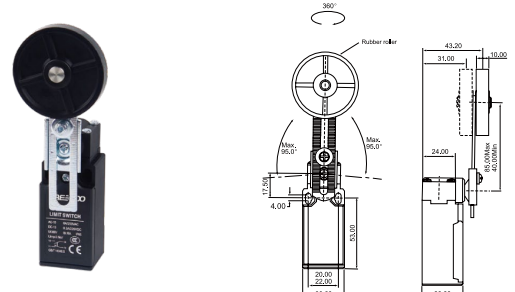


CLS-3 Vertical Limit Switch

Appearance and Dimension:


CLS-301

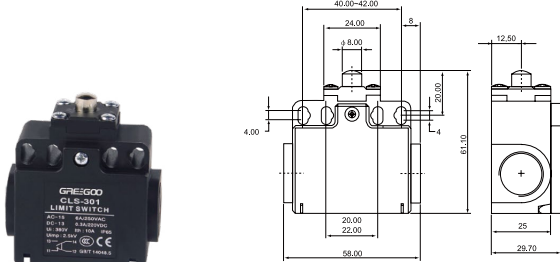


CLS-302

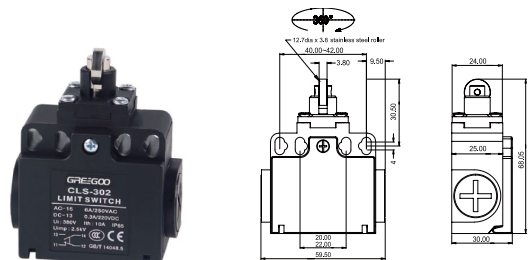

CLS-303

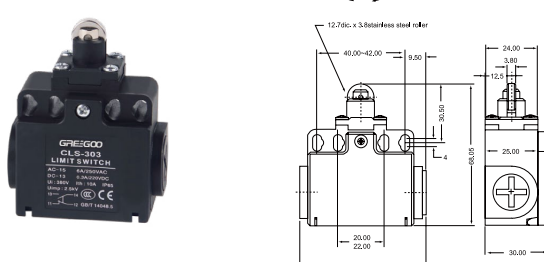


CLS-311

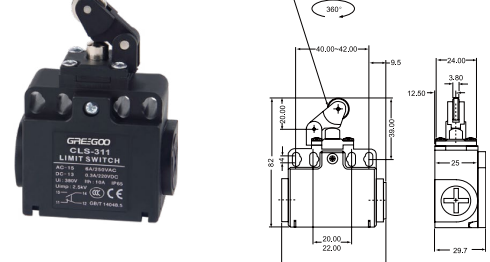


Appearance and Dimension


CLS-312

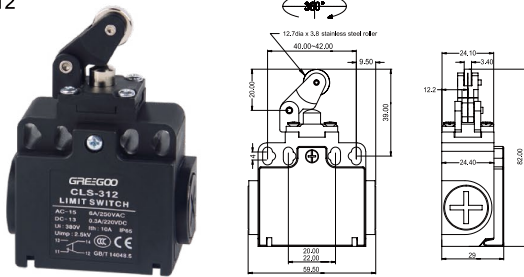


CLS-327

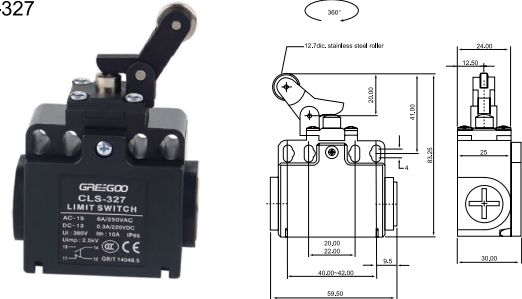


CLS-321

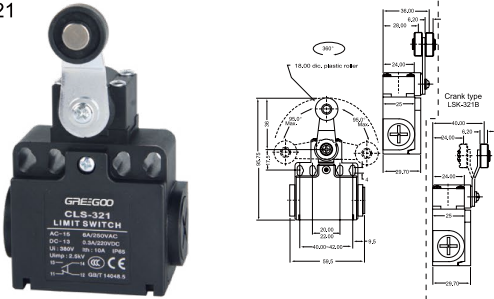


CLS-321M

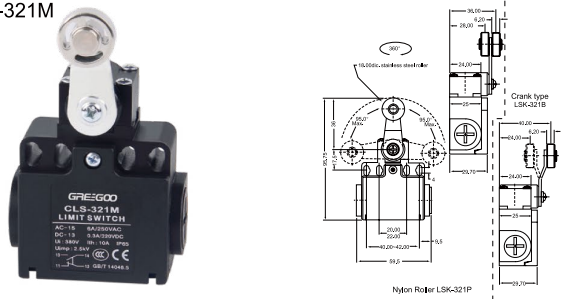


CLS-331

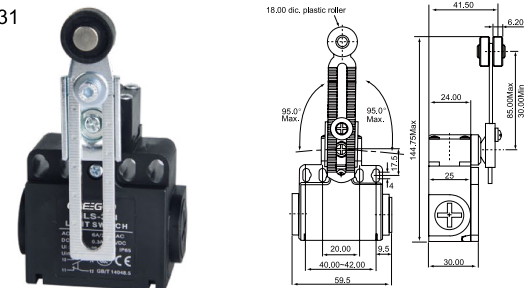


CLS-331M

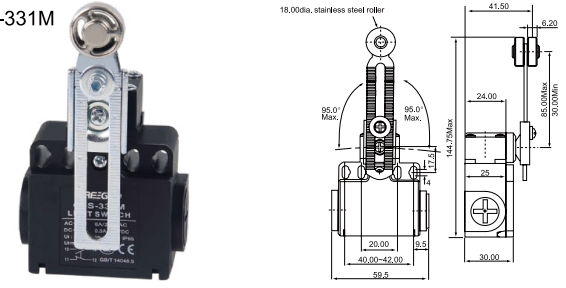


CLS-361

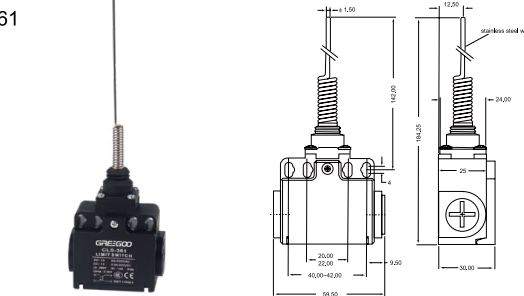


CLS-371

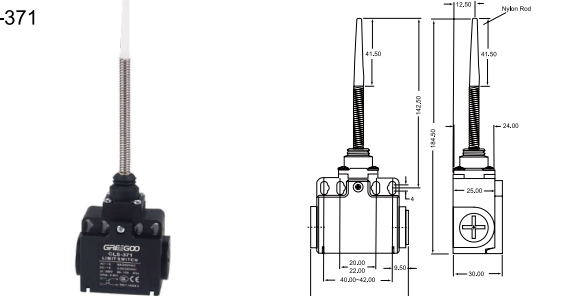

CLS-381

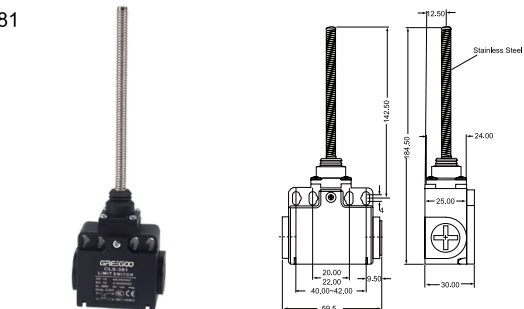

CLS-391

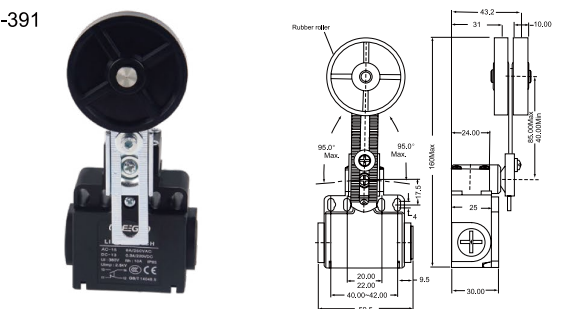

Features

- Forced open action device(NC contacts only), to disconnect the contact when the contact has fusing and other failures
- Strengthened top seal structure improves the sealing performance
- Built-in contact holder has fast-action type: 1NC/1NO; Slow-action: 1NC /1NO and 2NC

Model Number Structure

C4N —

4	1	2	2
---	---	---	---

① ② ③

Item	Code	Description
① Conduit / connector size	1	Pg13.5 (1 conduit type)
	4	M20 (1 conduit type)
	5	Pg13.5 (2 conduits type)
	8	M20 (2 conduits type)
② Built-in switch	1	1NC/1NO (quick-action type)
	2	2NC (quick-action type)
	A	1NC/1NO (slow-action type)
	B	2NC (slow-action type)
③ Head and driving rod	20	Roller lever (resin lever, resin ball)
	22	Roller lever (metal lever, resin ball)
	25	Roller lever (metal lever, metal resin ball)
	2G	Adjustable roller lever, Form Lock (metal lever, resin ball)
	2H	Adjustable roller lever, Form Lock (metal lever, rubber ball)
	2M	Adjustable roller lever, Form Lock (metal lever, metal resin ball)
	31	Top plunger type
	32	Top plunger ball type
	62	Unilateral cantilever ball type (horizontal)
	72	Unilateral cantilever ball type (vertical)
	80	Whisker type
	87	Plastic stick type

NOTE: The default size of conduit connector is M20x1.5.

Specifications

Protection level	IP66	
Life	Electrical	More than 500,000 times (AC250V 3A, resistive load) More than 300,000 times (AC250V 10A, resistive load)
Operating speed	1mm-0.5m/s(C4N-4120)	
Operating frequency	Electrical: 30 operations/min	
Contact resistance	25 mΩ or less	
Minimum working load	1mA resistive load below DC5V (N standard reference value)	
Rated insulation voltage (Ui)	300V	
Electric shock protection grade	Class II (double insulated)	
Pollution degree (Using conditions)	Pollution degree 3 (EN60947-5-1)	
Withstand voltage (EN60947-5-1)	Between homopolar terminals: 2.5kV	
	Between heteropolar terminals: 2.5kV	
	Between terminals and uncharged metal parts: 6kV	
Insulation resistance	Above 100MΩ	
Contact gap	Minimum 2 × 0.5mm quick-action type, Minimum 2 × 2mm slow-action type	
Vibration	Malfunction	10 ~ 55Hz 0.75mm single amplitude
Impact	Duration	1,000m/s ²
	Malfunction	300m/s ²
Ambient temperature	Using: -20~+70℃ (With no icing)	
Ambient humidity	Less than 95% RH	
Weight	About 82g (D4N-1120)	
	About 99g (D4N-5120)	

Note 1. The above values are initial values.

Note 2. Once the contact is connected to a standard load, it can not be used to connect a smaller load. If so, the contact may result in rough surface, thus losing contact reliability.

*1. The protection level is gotten based on test method of (EN60947-5-1). Please make sure its sealing under actual environmental conditions before use. The switch box has dust and oil resistance structure, but it should be used in places without dust, oil and chemicals. Otherwise it may lead to premature wear, damage or malfunction.

*2. The durability is for ambient temperature of 5℃ ~ 35℃ and humidity of 40% to 70% RH. For additional details, please contact us.


*3. When the ambient temperature is above 35℃, more than 2 circuits 3A 250VAC loads are prohibited.

*4. The values will vary with different switching frequency, environmental conditions, reliability level and other factors. Please confirm on the actual load in advance.




Forced Disconnecting Mechanism


1NC and 1NO contacts (quick-action type)

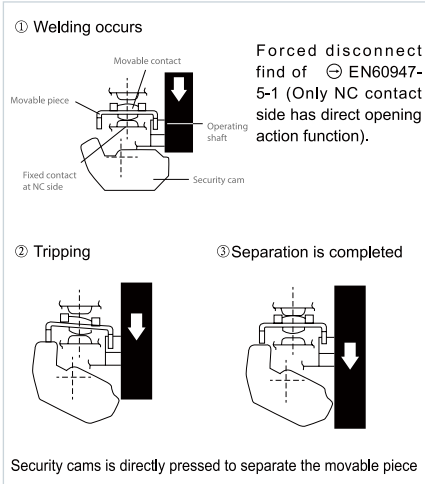

1NC and 1NO contacts (slow-action type)

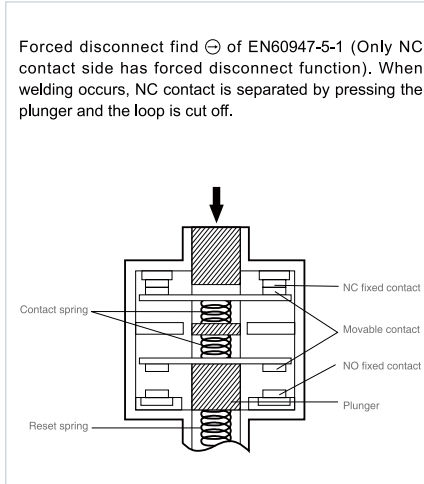

2NC contacts (slow-action type)

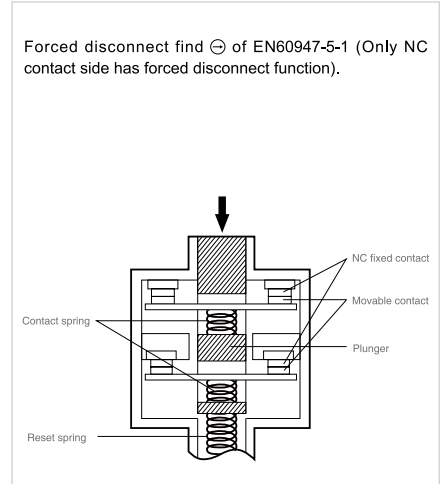

Contact Form

Model	Contact	Contact form	Operation mode	Explanation
C4N-□1□	1NC/1NO (Quick-action type)			Only NC contact (31-32) has forced disconnect function ($\ominus$) Contacts (13-14) and (31-32) can be used as heteropoles.
C4N-□2□	2NC (Quick-action type)			Only NC contact (31-32) has forced disconnect function ($\ominus$) Contacts (11-12) and (31-32) can be used as heteropoles.
C4N-□A□	1NC/1NO (Slow-action type)			Only NC contact (11-12) has forced disconnect function ($\ominus$) Contacts (11-12) and (33-34) can be used as heteropoles.
C4N-□B□	2NC (Slow-action type)			Only NC contact (31-32) has forced disconnect function ($\ominus$) Contacts (11-12) and (31-32) can be used as heteropoles.

Operating Characteristics

Quick-action type (1NC/1NO)(2NC), slow-action type (2NC)

Model Action characteristics			C4N-□ 120	C4N-□ 122	C4N-□ 125	C4N-□ 226	C4N-□ 131	C4N-□ 132	C4N-□ 162	C4N-□ 172	C4N-□ 12H	C4N-□ 12G	C4N-□□ 80	C4N-□□ 87
			C4N-□ 220	C4N-□ 222	C4N-□ 225	C4N-□ 226	C4N-□ 231	C4N-□ 232	C4N-□ 262	C4N-□ 272	C4N-□ 22H	C4N-□ 12M		
			C4N-□ B20	C4N-□ B22	C4N-□ B25		C4N-□ B31	C4N-□ B32	C4N-□ B62	C4N-□ B72	C4N-□ B2H	C4N-□ 22G		
												C4N-□ B2G*4		
Action force	OF	Max.	5.0N				6.5N	6.5N	5.0N	5.0N	4.5N		1.5N	1.5N
Restore force	RF	Min.	0.5N				1.5N	1.5N	0.8N	0.8N	0.4N			
Pretravel	PT		18~27°				2mm	2mm	4mm	4mm	18 ~ 27°		15°	15°
Overtravel	OT	Min.	40°				4mm	4mm	5mm	5mm	40°			
Poor response travel	MD	Max.*1	14°				1mm	1mm	1.5mm	1.5mm	14°			
Action position	OP		—				18.2±0.5mm	28.6±0.8mm	37±0.8mm	27±0.8mm	—			
Total travel	TT	*2	(80°)				(6mm)	(6mm)	(9mm)	(9mm)	(80°)			
Forced disconnected pretravel	DOT	Min.*3	50°				3.2mm	3.2mm	5.8mm	4.8mm	50°			
Forced disconnected force	DOF	Min.*3	20N				20N	20N	20N	20N	20N			

Note The simultaneity of ON / OFF operation of 2NC contacts have difference, please make sure before using it.

*1. Only for quick-action type.

*2. Reference values.

*3. Only for slow-action type. For safe use, please make sure that all values are within the range of maximum or minimum.

*4. The property value when length of lever is 32mm.

Operating Characteristics

■ Slow-action type (1NC/1NO)

Action characteristics			Model	C4N- □ A20	C4N- □ A22	C4N- □ A25	C4N- □ A26	C4N- □ A31	C4N- □ A32	C4N- □ A62	C4N- □ A72	C4N- □ A2H	C4N- □ A2G *8
Action force	OF	Max.		5.0N				6.5N	6.5N	5.0N	5.0N	4.5N	
Restore force	RF	Min.		0.5N				1.5N	1.5N	0.8N	0.8N	0.4N	
Pretravel	PT	*1		18 ~ 27°				2mm	2mm	4mm	4mm	18 ~ 27°	
	PT	(2nd)*2		(44°)				(2.9mm)	(2.9mm)	(5.2mm)	(4.3mm)	(44°)	
	PT	*3		27.5 ~ 36.5°				2.8mm	2.8mm	4mm	4mm	27.5 ~ 36.5°	
	PT	(2nd)*4		(18°)				(1mm)	(1mm)	(1.5mm)	(1.5mm)	(18°)	
Overtravel	OT	Min.		40°				4mm	4mm	5mm	5mm	40°	
Action position	OP			—				18.2 ± 0.5mm	28.6 ± 0.8mm	37 ± 0.8mm	27 ± 0.8mm	—	
	OP	*5		—				17.4 ± 0.5mm	28 ± 0.8mm	36 ± 0.8mm	26.1 ± 0.8mm	—	
Total travel	TT	*6		(80°)				(6mm)	(6mm)	(9mm)	(9mm)	(80°)	
Forced disconnected pretravel	DOT	Min.*7		50°				3.2mm	3.2mm	5.8mm	4.8mm	50°	
Forced disconnected force	DOF	Min.*7		20N				20N	20N	20N	20N	20N	

*1. NC contact is open.

*2. NO contact is closed.

*3. Only for MBB type.

*4. It is the reference value of MBB type.

*5. Only for MBB type.


*6. Reference values

*7. For safe use, please make sure that all values are within the range of maximum or minimum.


*8. The property value when length of lever is 32mm.

Appearance and Dimension


C4N-4131

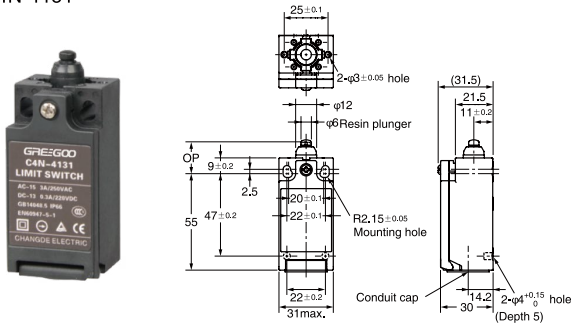


C4N-4132

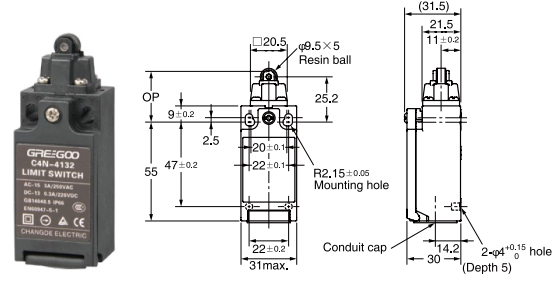

C4N-4162

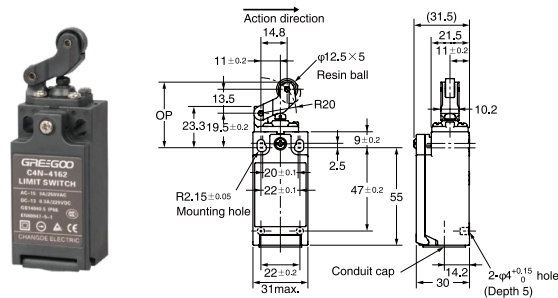


C4N-4172

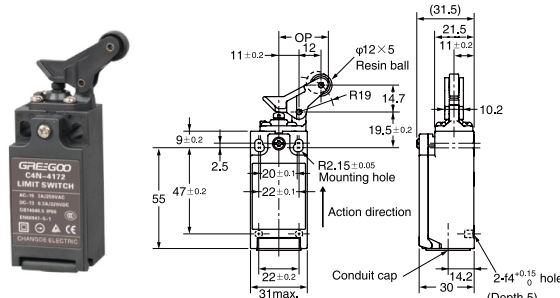


Appearance and Dimension

19


C4N-4120

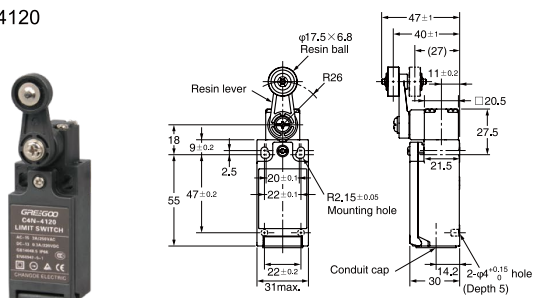


C4N-4122

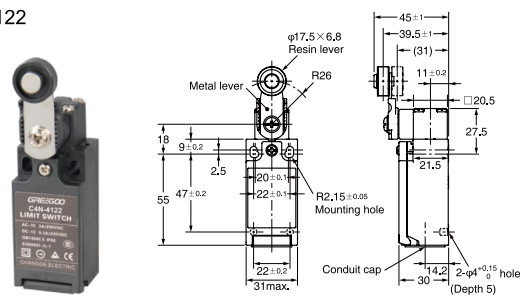


C4N-412M

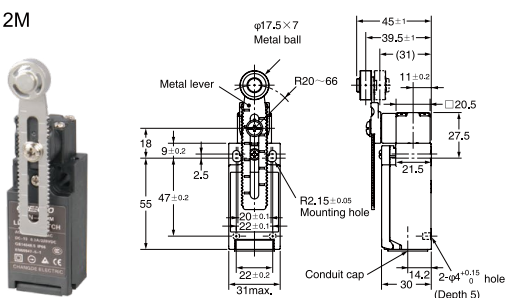


C4N-4125

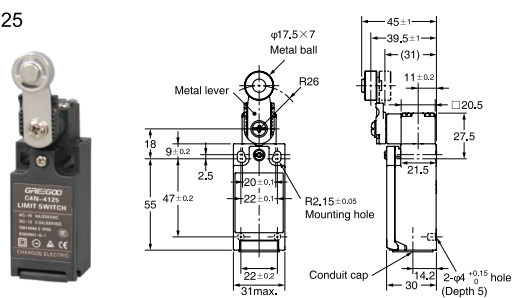


C4N-412G

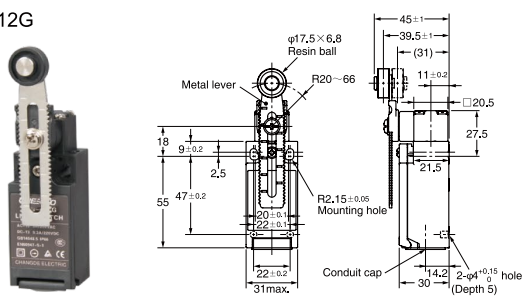


C4N-412H

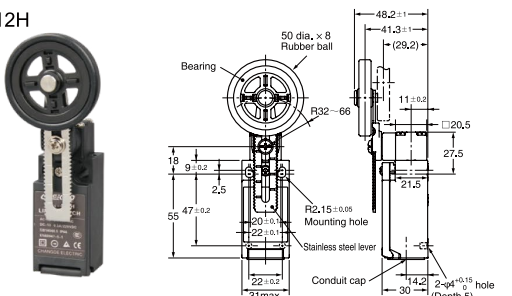


C4N-4180

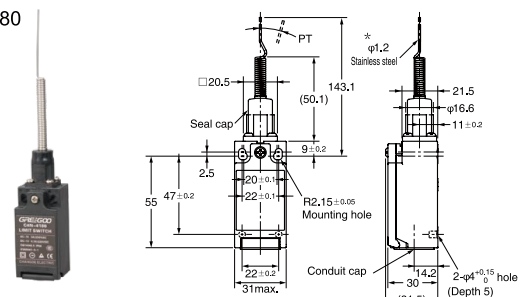


C4N-4187

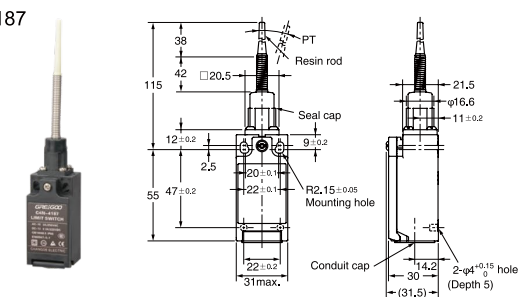

C4N-8131

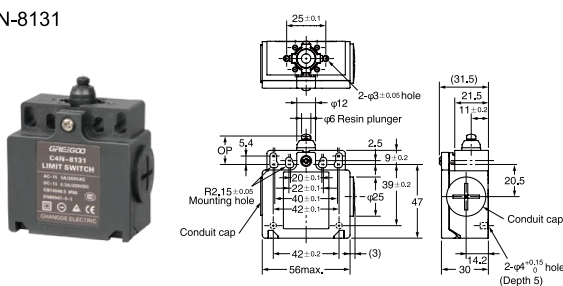


C4N-8132

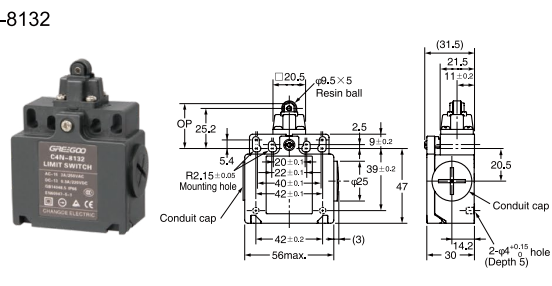


* Application of stainless steel washers and plastic stick are within 35mm from the front end, the entire action is within 70mm.

Appearance and Dimension


C4N-8162

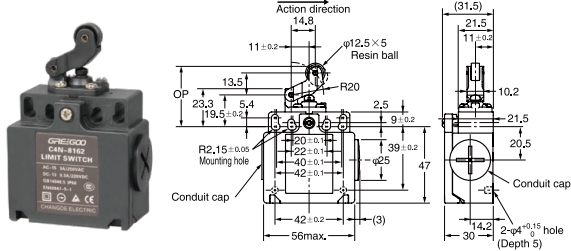


C4N-8172

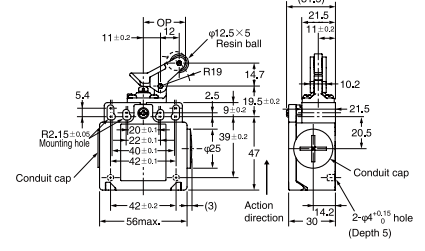


C4N-8120

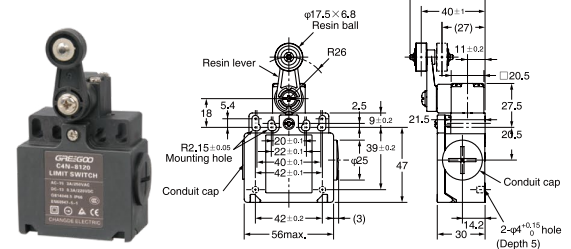


C4N-8122

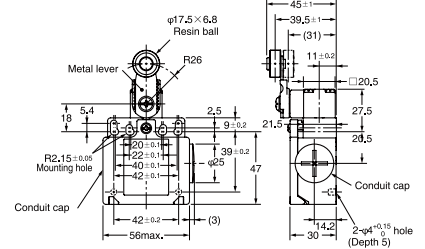


C4N-812M

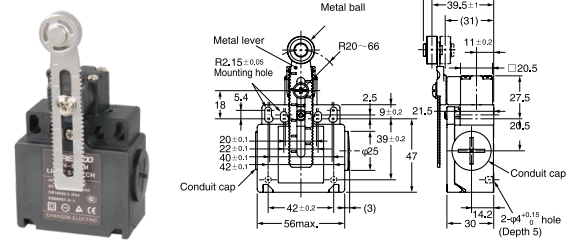


C4N-8125

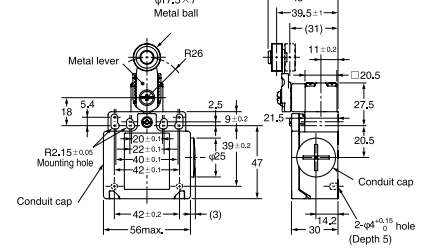


C4N-812G

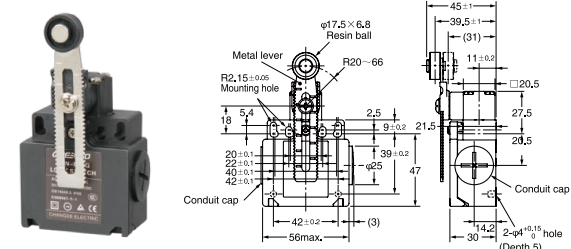


C4N-812H

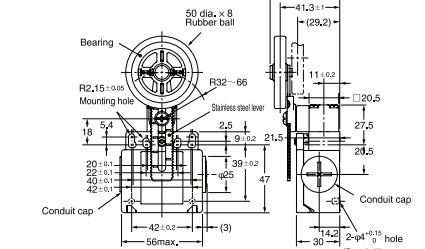

C4N-8180

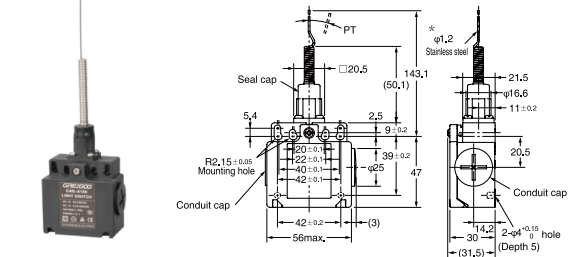

C4N-8187

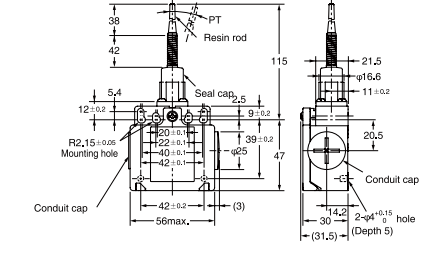


* Use of application of stainless steel washers and plastic stick are within 35mm from the front end, the entire action is within 70mm

Features

- Forced open action device(NC contacts only), to disconnect the contact when the contact has fusing and other failures
- Strengthened top seal structure improves the sealing performance
- Built-in contact holder has slow-action: 1NC /1NO and 2NC



Model Number Structure



Item	Code	Description
① Conduit / connector size	1	Pg13.5 (1 conduit type)
	4	M20 (1 conduit type)
	5	Pg13.5 (2 conduits type)
	8	M20 (2 conduits type)
② Built-in switch	A	1NC/1NO (slow-action type)
	B	2NC (slow-action type)
③ Head and driving rod	20	Roller lever (resin lever, resin ball)
	22	Roller lever (metal lever, resin ball)
	25	Roller lever (metal lever, metal resin ball)
	2G	Adjustable roller lever, Form Lock (metal lever, resin ball)
	2H	Adjustable roller lever, Form Lock (metal lever, rubber ball)
	2M	Adjustable roller lever, Form Lock (metal lever, metal resin ball)
	31	Top plunger type
	32	Top plunger ball type
	62	Unilateral cantilever ball type (horizontal)
	72	Unilateral cantilever ball type (vertical)

NOTE: The default size of conduit connector is M20x1.5.

Specifications

Protection level	IP66	
Life	Electrical	More than 500,000 times (AC250V 3A, resistive load) More than 300,000 times (AC250V 10A, resistive load)
Operating speed	1mm-0.5m/s(C4N-4A20R)	
Operating frequency	Max. 30 times/min	
Contact resistance	25 mΩ or less	
Minimum working load	1mA resistive load below DC5V (N standard reference value)	
Rated insulation voltage (Ui)	300V	
Electric shock protection grade	Class II (double insulated)	
Pollution degree (Using conditions)	Pollution degree 3 (EN60947-5-1)	
Withstand voltage (EN60947-5-1)	Between homopolar terminals: 2.5kV	
	Between heteropolar terminals: 2.5kV	
	Between terminals and uncharged metal parts: 6kV	
Insulation resistance	Above 100MΩ	
Contact gap	Minimum 2 × 0.5mm quick-action type, Minimum 2 × 2mm slow-action type	
Vibration	Malfuction	10 ~ 55Hz 0.75mm single amplitude
Impact	Duration	1,000m/s ²
	Malfuction	300m/s ²
Ambient temperature	Using: -20~+70℃ (With no icing)	
Ambient humidity	Less than 95% RH	
Weight	About 92g (D4N-1A20R)	

Note 1. The above values are initial values.

Note 2. Once the contact is connected to a standard load, it can not be used to connect a smaller load. If so, the contact may result in rough surface, thus losing contact reliability.

*1. The protection level is gotten based on test method of (EN60947-5-1). Please make sure its sealing under actual environmental conditions before use. The switch box has dust and oil resistance structure, but it should be used in places without dust, oil and chemicals. Otherwise it may lead to premature wear, damage or malfunction.

*2. The durability is for ambient temperature of 5℃ ~ 35℃ and humidity of 40% to 70% RH. For additional details, please contact us.


*3. When the ambient temperature is above 35℃, more than 2 circuits 3A 250VAC loads are prohibited.

*4. The values will vary with different switching frequency, environmental conditions, reliability level and other factors. Please confirm on the actual load in advance.

Forced Disconnecting Mechanism


■ 1NC and 1NO contacts (slow-action type)

Only NC contact has forced disconnect structure.
When melting occurs, the contact can be isolated by pressing the plunger to cut off the loop. (In accordance with EN60947-5-1 force disconnect operation).

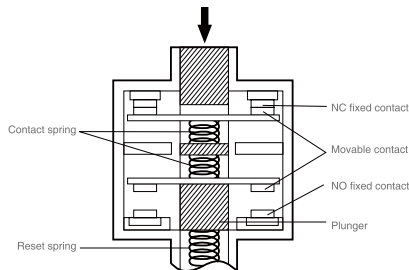

■ 2NC contacts (slow-action type)

When melting occurs, the contact can be isolated by pressing the plunger to cut off the loop. (In accordance with EN60947-5-1 force disconnect operation).

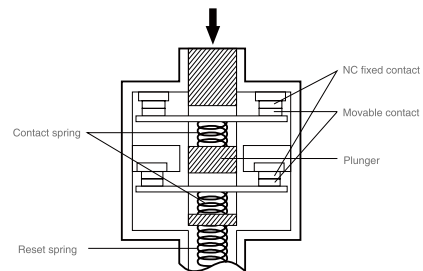

Contact Form

Model	Contact	Contact form	Operation mode	Explanation
C4N- □ A □ R	1NC/1NO (Slow-action type)			Only NC contact (11-12) has forced disconnect function (-) Contacts (11-12) and (33-34) can be used as heteropoles.
C4N- □ B □ R	2NC (Slow-action type)			Only NC contact (31-32) has forced disconnect function (-) Contacts (11-12) and (31-32) can be used as heteropoles.

Operating Characteristics

Model		C4N-□□ 20R	C4N-□□ 22R	C4N-□□ 2GR *2	C4N-□□ 2HR	C4N-□□ 31R	C4N-□□ 32R	C4N-□□ 62R	C4N-□□ 72R
LF	Max.	6.45N	6.45N	5.6N	5.4N	10.8N	10.8N	7.5	7.9N
LT	Max.	55°	55°	55°	55°	4.5mm	4.5mm	7mm	7mm
PT1	*3	18~27°	18~27°	18~27°	18~27°	2mm	2mm	4mm	4mm
PT2	*4	(44°)	(44°)	(44°)	(44°)	(2.9mm)	(2.9mm)	(5.2mm)	(4.3mm)
OP		--	--	--	--	34 ± 0.5mm	44.4 ± 0.8mm	53 ± 0.8mm	27 ± 0.8mm
TT	*5	80°	80°	80°	80°	(6mm)	(6mm)	(9mm)	(9mm)
DOT	Min. *6	50°	50°	50°	50°	3.2mm	3.2mm	5.8mm	5.8mm
DOF	Min. *6	20N		20N	20N	20N	20N	20N	20N

Note

*1. The simultaneity of ON / OFF operation of 2NC contacts have difference, please make sure before using it.

*2. The property value when length of lever is 32mm.

*3. PT value when NC contact is at open (OFF) state.


*4. PT common value when NO contact is at close (ON) state (only for 1NC/1NO types).

*5. Reference values.


*6. Load and travel values of forced disconnect structure. To ensure safety, be sure to remain within the upper and lower range.

Appearance and Dimension


C4N-8A31R

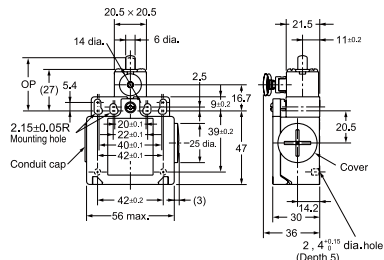


C4N-8A32R

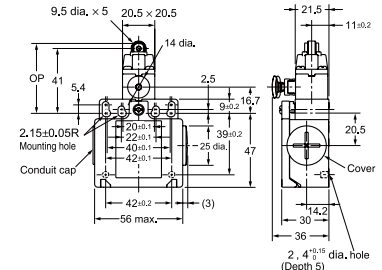


C4N-8A62R

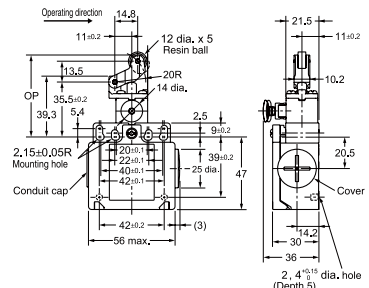


C4N-8A72R

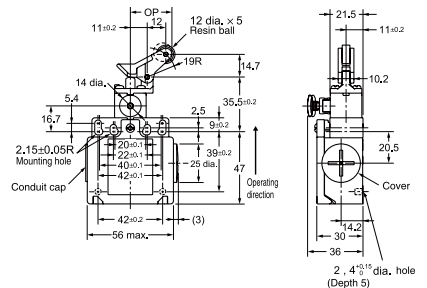


C4N-8A20R

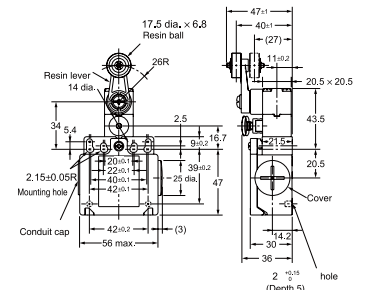


C4N-8A22R

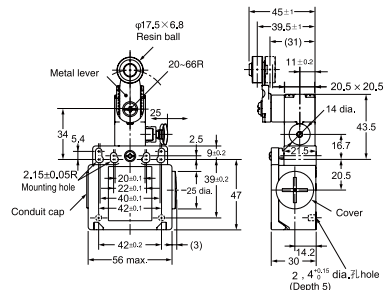


C4N-8A2MR

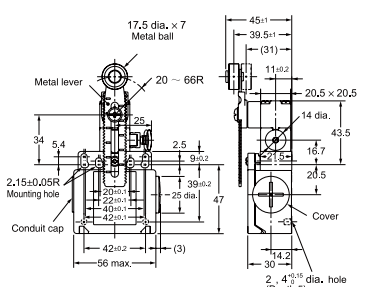


C4N-8A25R

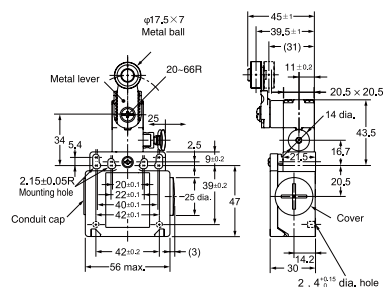

C4N-8A2GR

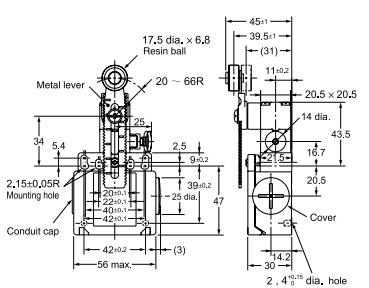


C4N-8A2HR

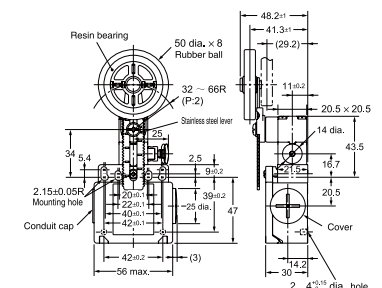

Features

- Forced open action device (NC contacts only), to disconnect the contact when the contact has fusing and other failures
- Strengthened top seal structure improves the sealing performance
- Built-in contact holder has fast-action type: 1NC / 1NO; Slow-action: 1NC / 1NO and 2NC

Model Number Structure



Item	Code	Description
① Conduit / connector size	1	Pg13.5 (1 conduit type)
	4	M20 (1 conduit type)
② Built-in switch	1	1NC/1NO (quick-action type)
	5	1NC/1NO (slow-action type)
	A	2NC (slow-action type)
③ Head and driving rod	11	Roller lever (resin lever, resin ball)
	12	Form-Lock Adjustable roller lever, Form-Lock (metal lever, metal ball)
	15	Roller lever (metal ball)
	16	Form-Lock Adjustable roller lever, Form-Lock (resin ball)
	17	Form-Lock Adjustable stick lever, Form-Lock (long lever)
	18	Form Lock Adjustable roller lever, Form Lock (metal lever, rubber ball)
	70	Top ball plunger type
	71	Ball plunger type
	72	Ball plunger type
	81	Coil spring type
	87	Plastic stick type
	86	Metal stick type

NOTE: The default size of conduit connector is M20x1.5.

Ratings

Rated voltage (V)	Non-inductive load (A)				Inductive load (A)			
	Resistive load		Lamp load		Inductive load		Motor load	
	NC	NO	NC	NO	NC	NO	NC	NO
AC	125	10	3	1.5	10		5	2.5
	250	10	2	1	10		3	1.5
	400	10	1.5	0.8	3		1.5	0.8
DC	8	10	6	3	10		6	
	14	10	6	3	10		6	
	30	6	4	3	6		4	
	125	0.8	0.2	0.2	0.8		0.2	
	250	0.4	0.1	0.1	0.4		0.1	

Note1. The above values represent constant current.

2. The so-called inductive load refers to the load with power factor of 0.4 or more (AC) and the time constant below 7ms (DC).

3. The so-called lamp load refers to the load with 10 times of surge current.

4. The so-called motor load is the load with 6 times of surge current.

Specifications

Protection level		IP66
Life	Electrical	More than 500,000 times (AC250V 10A, resistive load)
Operating speed		1mm~0.5m/s
Operating frequency	Mechanical	120 times/min
	Electrical	30 times/min
Rated frequency		50/60Hz
Insulation resistance		100M Ω or more (DC500V Megameter) between homopolars, and between terminals and uncharged metal parts
Contact resistance		25m Ω or less (initial value)
Withstand voltage (EN60947-5-1)		Between homopolar terminals: 2.5kV(quick-action type)/4kV(slow-action type)
		Between heteropolar terminals: 2.5kV(slow-action type)
		Between charged metal parts: 4kV
		Between terminals and uncharged metal parts: 6kV
Rated insulation voltage (Ui)		600V(EN60947-5-1)
Reverse voltage when on/off		1500V max (EN60947-5-1)
Pollution degree (environmental conditions)		Pollution degree 3 (EN60947-5-1)
Electric shock protection grade		Class I (with ground terminal)
Vibration	Malfunction	10 ~ 55Hz 0.75mm single amplitude
Impact	Duration	1,000m/s ²
	Malfunction	300m/s ²
Ambient temperature		Using: -20~+80℃ (With no icing)
Ambient humidity		Less than 95% RH
Weight		About 250g

Note 1. The above are initial values.


Note 2. Values of some models may be different from the above, please contact us for details.

*1. The protection structure is tested based on method predetermined by standard (EN60947-5-1), please confirm the sealing in advance according to the operating environment and conditions.

*2. The conditions of life are the values under the ambient temperature of 5~35℃ and humidity of 40 to 70% RH. For other detailed conditions, please contact us.


Forced Disconnecting Mechanism

■ 1NC and 1NO contacts (quick-action type)

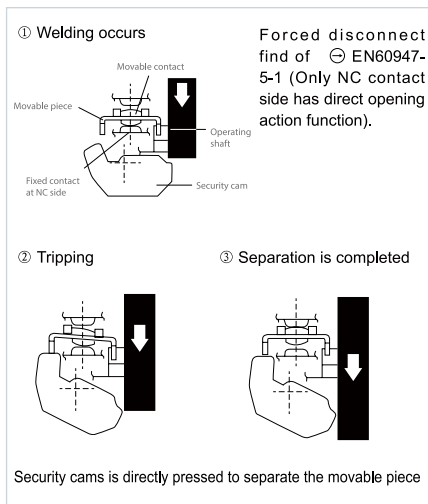


■ 1NC and 1NO contacts (slow-action type)

Forced disconnect find ⊖ of EN60947-5-1 (Only NC contact side has forced disconnect function). When welding occurs, NC contact is separated by pressing the plunger and the loop is cut off.



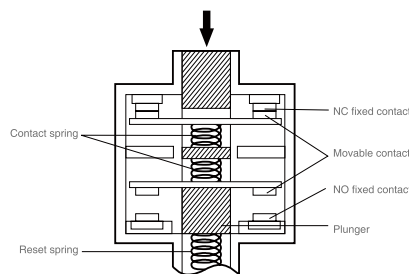


■ 2NC contacts (slow-action type)

Forced disconnect find ⊖ of EN60947-5-1 (Only NC contact side has forced disconnect function).

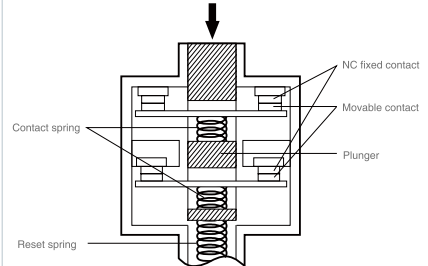

Contact Form

Model	Contact	Contact form	Operation mode	Explanation
C4B- □ 1 □ N	1NC/1NO (Quick-action type)			Only NC contact (11-12) has forced disconnect function and got the certification (terminal No.11-12,13-14 can not be used as different heteropoles)
C4B- □ 5 □ N	1NC/1NO (Slow-action type)			Only NC contact (11-12) has forced disconnect function and got the certification (terminal No.11-12,13-14 can not be used as different heteropoles)
C4B- □ A □ N	2NC (Slow-action type)			Two NC contacts (11-12, 21-22) have forced disconnect function and got the certification (terminal No.11-12,21-22 can be used as different heteropoles)

Operating Characteristics

Model			C4B- □□ 11N	C4B- □□ 15N	C4B- □□ 16N *1	C4B- □□ 17N *2	C4B- □□ 18N *2	C4B- □□ 70N	C4B- □□ 71N	C4B- □□ 81N	C4B- □□ 86N	C4B- □□ 87N
Action characteristics												
Action force	OF	Max.	9.41N	9.41N	9.41N	2.12N	9.41N	18.63N	18.63N	1.47N	1.47N	1.47N
Restore force	RF	Min.	1.47N	1.47N	1.47N	0.29N	1.47N	1.96N	1.96N			
Pretravel	PT		21° ± 3°	21° ± 3°	21° ± 3°	21° ± 3°	21° ± 3°	2mm	2mm	15	15	15
	PT	(2nd) *3 *5	(45°)	(45°)	(45°)	(45°)	(45°)	(3mm)	(3mm)			
Overtravel	OT	Min.	50°	50°	50°	50°	50°	5mm	5mm			
Poor response travel	MD	Max. *4	12°	12°	12°	12°	12°	1mm	1mm			
Forced disconnected pretravel	DOT	Min. *3*6	35°	35°	35°	35°	35°	3.2mm	3.2mm			
		*4*6	55°	55°	55°	55°	55°					
Forced disconnected force	DOF	Min. *6	19.61N	19.61N	19.61N	19.61N	19.61N	49.03N	49.03N			
Total travel	TT	*5	(75°)	(75°)	(75°)	(75°)	(75°)	(7mm)	(7mm)			
Free position	FP	Max.						38mm	51mm			
Action position	OP							35 ± 1mm	48 ± 1mm			

Note The simultaneity of ON / OFF operation of 2NC contacts have difference, please make sure before using it.

*1. The property value when length of lever is 31.5mm.

*2. The property value when length of lever is 140mm.

*3. Only for slow-action type.


*4. Only for quick-action type.

*5. Reference values.


*6. Please make sure in order to ensure the safe use.

Appearance and Dimension

C4B-4111N

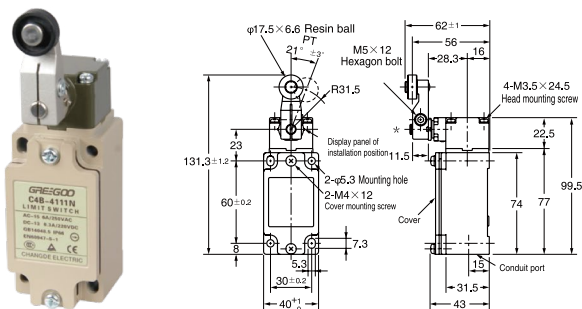


C4B-4115N

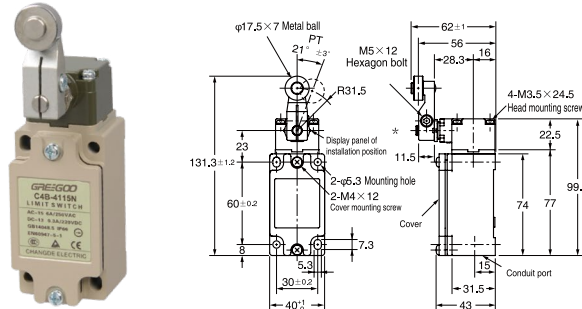


Appearance and Dimension


C4B-4116N

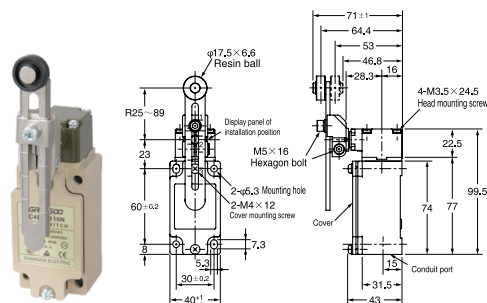


C4B-4112N

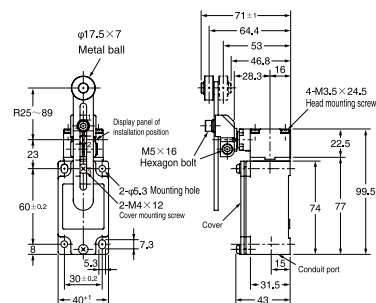


C4B-4118N

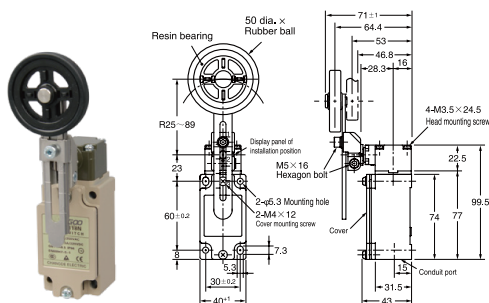


C4B-4170N

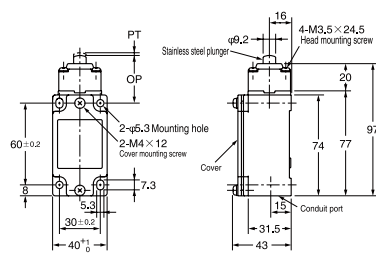


C4B-4171N

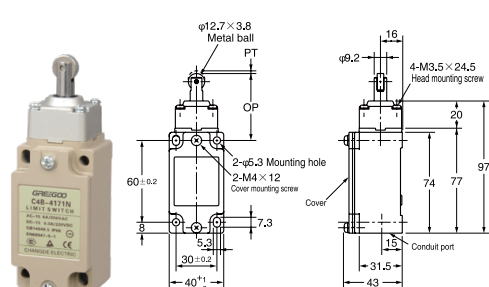

C4B-4172N

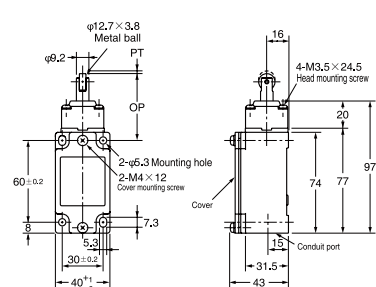


C4B-4117N

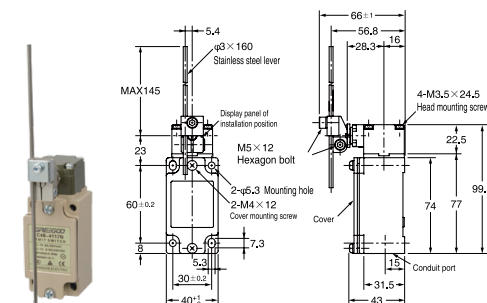

C4B-4181N

If the switch is not safety limit switch in structure, it is common limit switch

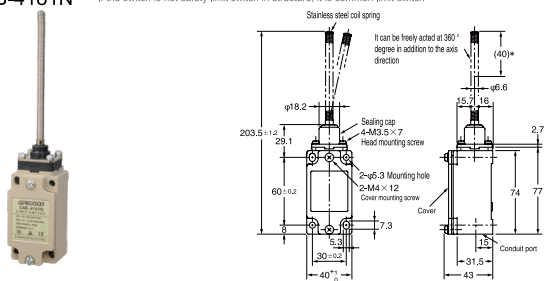


It should be set that the stopper is touched at the position within 40mm from the end.

C4B-4186N

If the switch is not safety limit switch in structure, it is common limit switch

Metal stick type

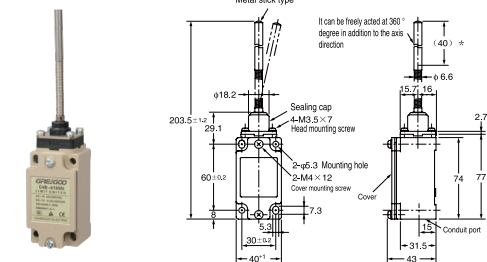


It should be set that the stopper is touched at the position within 40mm from the end

C4B-4187N

If the switch is not safety limit switch in structure, it is common limit switch

P

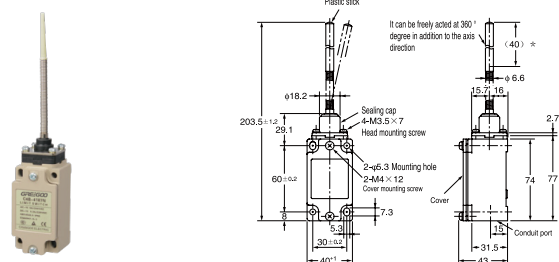


It should be set that the stopper is touched at the position within 40mm from the end.

Features

- Built-in CM horizontal limit switch
- High mechanical strength, mainly consists of aluminum cast
- Water-proof and oil-proof construction
- Same rated value and characteristic with CM horizontal limit switch
- Various actuators for different applications

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	5	5	1.5	0.7	3	3	2	1
250VAC	5	5	1	0.5	3	3	1.5	0.8
8VDC	5	5	3	3	5	4	3	3
14VDC	5	5	3	3	4	4	3	3
30VDC	5	5	3	3	4	4	3	3
125VDC	0.4	0.4						
250VDC	0.2	0.2						
Inrush Current	N.C: below 24A, N.O: below 12A							

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec. max.(DC).
2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.


Specifications

Operation speed	5mm-0.5m/s
Operating frequency	Electical: 20 operations/min
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ min. (below 500VDC)
Dielectric strength	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100G'S) Malfunction: 300m/Sec ² (about 30G'S)
Ambient temperature	Using: -20~+80℃ (With no icing)
Humidity	<95% RH
Electrical life	500,000 operations above
Protection level	IP66

NOTES: The default size of conduit connector is M20x1.5, outfitting cable connector. Conduit connector size is PG13.5, with product model number plus (-P), example: TZ-6104-P.


Operating Characteristics

Model	TZ-6	TZ-6001	TZ-6002	TZ-6003	TZ-6004	TZ-6043	TZ-6101	TZ-6102	TZ-6103	TZ-6104	TZ-6143
Operating force	OF(Max.)	250~350g	250~350g		570g	570g	800g	500g		640g	640g
Release force	RF(Min.)	114g	114g		170g	170g	240g	100g		230g	230g
Pre-travel	PT(Max.)	0.4mm	0.5mm		4mm	4mm	2mm	1mm		5mm	5mm
Movement differential	MD(Max.)	0.05mm	0.05mm		0.4mm	0.4mm	0.1mm	0.12mm		0.4mm	0.4mm
Over travel	OT(Min.)	5.5mm	3.6mm		6mm	6mm	5mm	3.5mm		6mm	6mm
Operating Position	OP(mm.)	38.2 ± 0.8mm	49.7 ± 1mm				45.8 ± 0.8mm	49.7 ± 0.8mm			

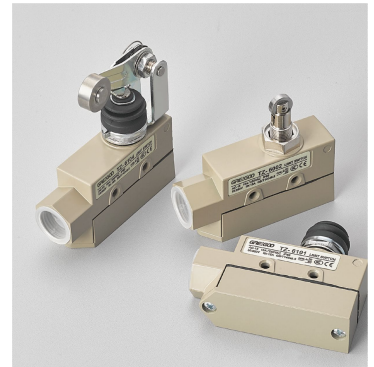


Appearance and Dimension


TZ-6001

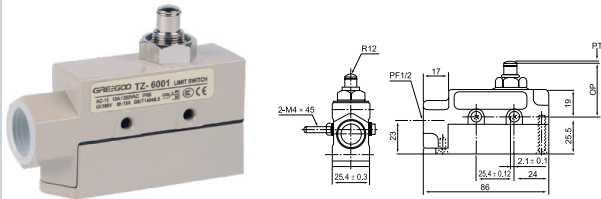


TZ-6101

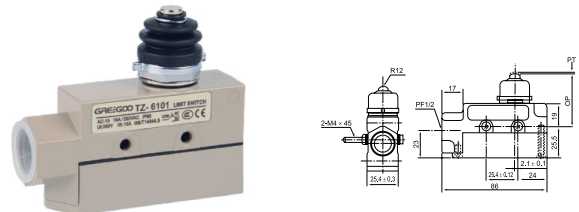


TZ-6002

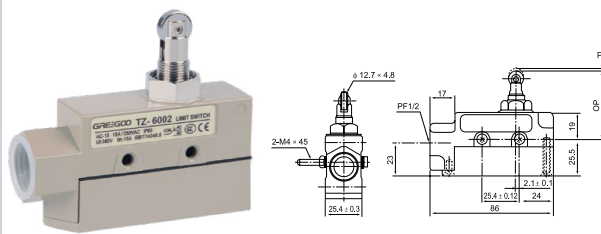


TZ-6003

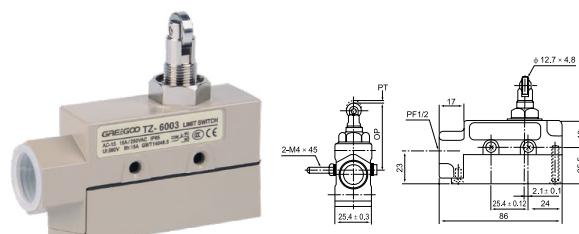


TZ-6102

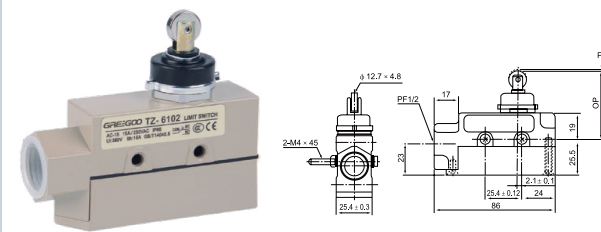


TZ-6103

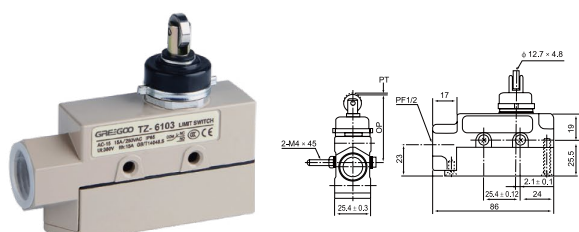


TZ-6004

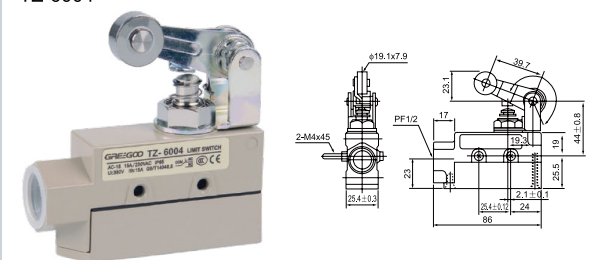


TZ-6104

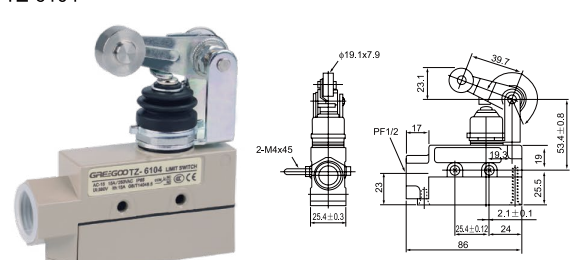


TZ-6143

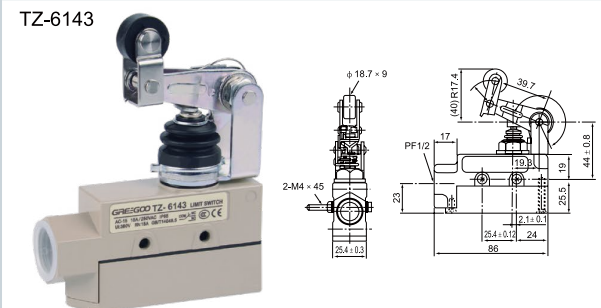

TZ-6106

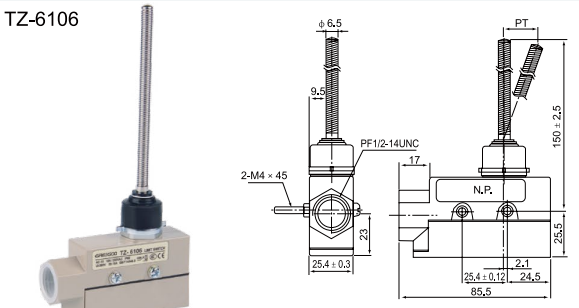

Model Number Structure



Designation	Model NO.	Description
Type	CZ-93	Safety switch
Type of contact blocks fitted	B	2B(2NC)
	C	1A1B(1NC/1NO)
Conduit/connector size	PG	PG 13.5XP1.5
	PM	M20X1.5
Actuating keys	None	None
	01	Horizontal
	02	90° Vertical
	03	Adjustable

NOTE: The default size of conduit connector is M20x1.5.



Ratings


Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125 VAC	10		3	1.5	10		5	2.5
250 VAC	10		2	1	10		3	1.5
400 VAC	10		1.5	0.8	3		1.5	0.8
8 VDC	10		6	3	10		6	6
14 VDC	10		6	3	10		6	6
30 VDC	6		4	3	6		4	4
125 VDC	0.8		0.2	0.2	0.8		0.2	0.2
250 VDC	0.4		0.1	0.1	0.4		0.1	0.1

Specifications


Rating	3A 240VAC (A300)
Operating speed	0.1m~0.5m/s
Operating frequency	30 operations/min
Contact resistance	25mΩ max. (initial).
Insulation resistance	100mΩ min. (at 500VDC)
Rated insulation voltage(UI)	400V
Dielectric strength	AC2500V/Umip 4KV
Vibration	10 to 55Hz, 1.5mm double amplitude
Shock	Mechanical: Approx. 1000m/s ² (Approx. 100G'S) Electrical: Approx. 300m/s ² (Approx. 30G'S)
Ambient temperature	Using: -20~+70℃ (With no icing)
Ambient Humidity	< 95% RH
Electrical life	150,000 operations/min.
Protection level	IP65 (IEC Standard)

Cautions


To prevent the wear and the space should be within 1mm between the key and middle of the insert hole.

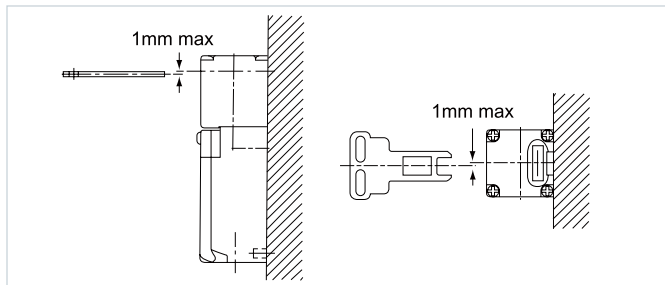

When in use, there should put a plate on the top to prevent the key overinsert. To prevent nonmovement, the space between the plate and the switch should be under 3 mm.

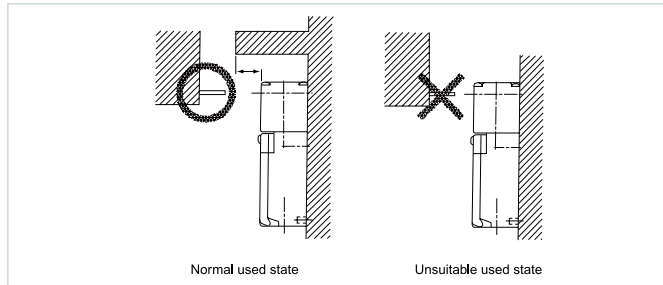

Forced Disconnecting Mechanism

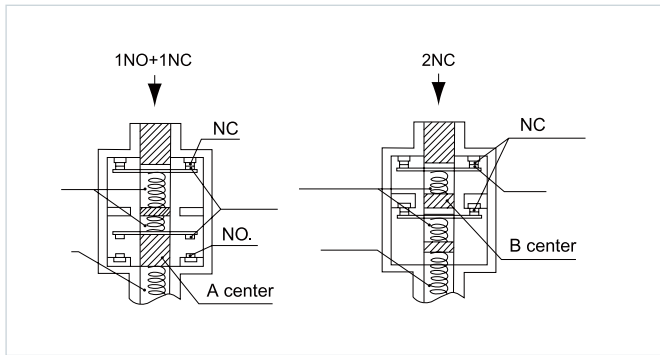


When the contact block get fire, press on the middle of the key structure, the NC strict leaving structure can push the contact block a way cut off the movement.

Operating Characteristics


Key plug in force	14.7N(1,500gf)
key pull out force	29.42N(3,000gf)
Pretravel	6 ± 3mm
Total travel	(28mm)
Force required to have positive	58.84N(6,000gf)
Positive opening travel	10mm

Appearance and Dimension


CZ-93CPM



CZ-93CPM01

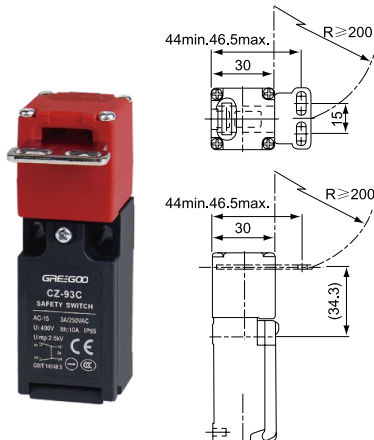

CZ-93BPM02

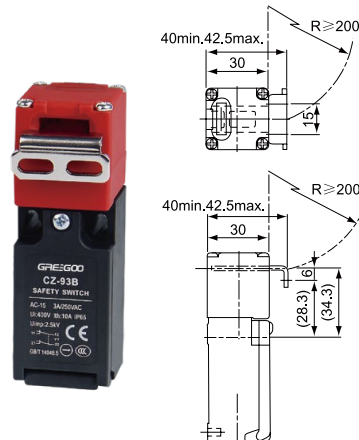


CZ-93CPM03




Key Dimension


CZ93-K1

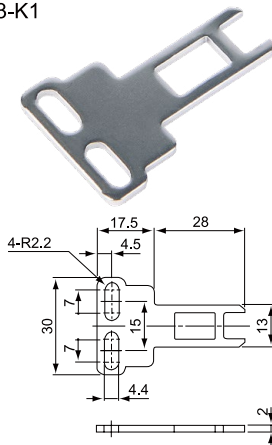

CZ93-K2

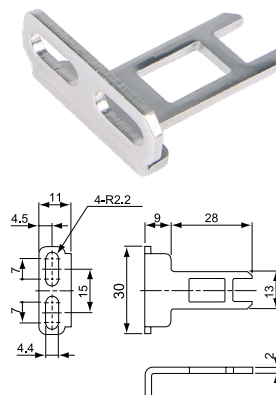


CZ93-K3

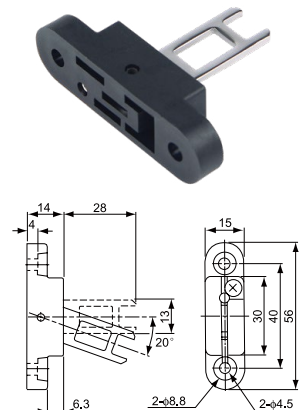

Features

- High mechanical strength, mainly consists of aluminum cast
- Water proof, oil proof and dust proof construction
- Various actuators for different applications

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125 VAC	5 (0.1)		1.5	0.7	3		2.5	1.3
250 VAC	3		1	0.5	2		1.5	0.8
8 VDC	5 (0.1)		2		5	4	3	
14 VDC	5 (0.1)		2		4	4	3	
30 VDC	4 (0.1)		2		3	3	3	
125 VDC	0.4		0.05		0.4	0.4	0.05	
250 VDC	0.2		0.03		0.2	0.2	0.03	

Note: Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications


Rating	5A 125V, 3A 250VAC
Operating speed	1mm~1m/s (Swing rod type) 0.1mm~0.5m/s (Plunger type)
Operating frequency	Electrical: 30 operations/min.
Contact resistance	25mΩ max. (initial)
Insulation resistance	100mΩ min. (at 500VDC)
Dielectric strength	1000VAC, 50/60 Hz for 1 minute between terminals of the same polarity
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration Frequency	10 to 55Hz, 1.5mm double amplitude
Shock	Mechanical: Approx. 1000m/s ² (Approx. 100G'S) Electrical: Approx. 500m/s ² (Approx. 50G'S)
Ambient temperature	Using: -20~+70°C (With no icing)
Humidity	< 95% RH
Electrical life	200,000 operations/min.
Weight	Approx. 360g (cable length 3m) Approx. 540g (cable length 5m)
Protection level	IP67

Operating Characteristics


Model	CZ-3	CZ-3101	CZ-3102	CZ-3103	CZ-3104 (3107/3108)	CZ-3110	CZ-3111	CZ-3112	CZ-3113	CZ-3169 (3166/3167/3168)
Operating Force	OF(Max.)	11.77N	11.77N	11.77N	5.69N	11.77N	17.65N	17.65N	17.65N	1.47N
Release Force	RF(Min.)	4.41N	4.41N	4.41N	1.47N	4.41N	4.41N	4.41N	4.41N	-
Pre-Travel	PT(Max.)	1.8mm	1.8mm	1.8mm	25	1.8mm	1.8mm	1.8mm	1.8mm	15°
Over Travel	OT(Min.)	3mm	3mm	3mm	40	3mm	3mm	3mm	3mm	-
Movement Differential	MD(Max.)	0.2mm	0.2mm	0.2mm	3	0.2mm	0.2mm	0.2mm	0.2mm	-
Operating Position	OP(mm.)	15.7 ± 1mm	28.5 ± 1mm	28.5 ± 1mm	-	28.5 ± 1mm	24.9 ± 1mm	34.3 ± 1mm	34.3 ± 1mm	-

Appearance and Dimension


CZ-3101




CZ-3102




CZ-3103




CZ-3104




CZ-3107




CZ-3108




CZ-3110




CZ-3111




CZ-3112




CZ-3113



CZ-3166



CZ-3167




The technical drawing illustrates the design of a pressure sensor. On the left is a photograph of the physical component, which features a square base with two mounting holes and a long, thin probe extending from the top. To the right are two detailed cross-sectional views.

The first cross-section shows the internal assembly with various components labeled with letters A through J. Key dimensions include:


- A total height of 100 units.
- An outer diameter of $\varnothing 6.3 \pm 0.1$.
- An inner diameter of $\varnothing 4.75 \pm 0.05$.
- A small gap dimension of 0.2 units.
- A bottom flange width of 2 units.
- A label "WARGES IN 0.2 P 0.2" pointing to a specific part.

The second cross-section provides a different perspective of the internal structure, highlighting the probe's connection point at the top with a diameter of $\varnothing 1.8$. The overall width of this section is indicated as 1.5 units.


The switch bodies are filled with resin for sealing purposes. To avoid stressing the cable and switch body, fasten the switch at 5 cm or farther away from the switch body, should the wire be bent, the bending radius shall be at least 45mm.



The service life and accuracy of switches will be effected by the shape of actuator operation frequency & over travel. So the angular of the fixing level should be about 30° , the surface finish of the fixing level should be over, the hardness is from HV400~500. When installing, the position of the concave part should be above the standard panel


[illegible]

A maximum of six switches may be mounted together as a switch bank. During the installation, the convex part of the switch back. The mounting panel shall be 6mm or thicker.

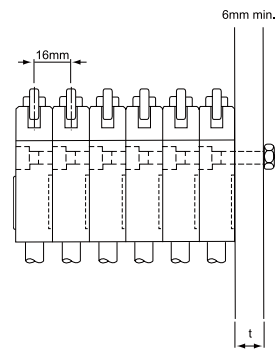

Model	Screw type	Torque
1	M5 fastening screws	43.4~52lb.in (50~60kgf.cm)
2	M3.5 installing screws	6.9~7.9lb.in (8~9kgf.cm)


Mount the switch body to a rigid mounting panel using two M5 screws.




Features

- Integrated injection molded housing with high mechanical strength
- IP67 High protection
- Small size, thickness only 16mm, wide applicability
- The installation is simple and convenient

Contact Form



Model Designation



No	Item	Code	Description	Forced disconnection Yes/No
①	Serial number	C6N	High precision type	
②	Shell material	P	Plastic	
③	Contact structure and contact material	1	1NC/1NO	
④	Head and drive rod	04	Ball swing rod type (metal swing rod, resin ball)	Only NC end has forced disconnection
		05	Ball swing rod type (metal swing rod, metal ball)	Only NC end has forced disconnection
		08	Adjustable ball swing rod (metal swing rod, resin ball)	Only NC end has forced disconnection
		09	Adjustable ball swing rod (metal swing rod, metal ball)	Only NC end has forced disconnection
		11	Top plunger type	Only NC end has forced disconnection
		17	M12 Top plunger type	Only NC end has forced disconnection
		22	Top plunger horizontal ball (metal ball) type	Only NC end has forced disconnection
		23	Top plunger vertical ball (metal ball) type	Only NC end has forced disconnection
		24	M12 Top plunger horizontal ball (metal ball) type	Only NC end has forced disconnection
		25	M12 Top plunger vertical ball (metal ball) type	Only NC end has forced disconnection
		15	Single-side cantilever ball type (horizontal to right)	Only NC end has forced disconnection
		16	Single-side cantilever ball type (horizontal to left)	Only NC end has forced disconnection

④	Head and drive rod	67	Spring type	None
		68	Metal rod coil spring type	None
		69	Tentacle type	None
		66	Plastic rod type	None
		07	Adjustable rod swing rod type	None
⑤	Outlet mode	None	Standard type (side outlet)	
⑥	Standard type (side outlet)	None	No line	
		L1~L5	1~5m	

Special Specification Code Description

Code	Description	Picture
△□	△ means: 1=1NO,2=1NC; □ Indicates: None: ungrounded. G: grounded.	 RVV 0.75mm²
D ○△□	DT type connectors (○ represents 2=DT04-2P, 3=DT04-3P, 4=DT04-4P, 6=DT04-6P; △ represents: 1=1NO,2=1NC,3=1NO1NC; □ Indicates: None: ungrounded. G: grounded	 RVV 0.75mm²
A ○△□	AMP type connectors (○ represents 2=AMP04-2P, 3=AMP04-3P, 4=AMP04-4P, 6=DAMP04-6P; △ represents: 1=1NO,2=1NC,3=1NO1NC; □ Indicates: None: ungrounded. G: grounded	 RVV 0.75mm²
M ○△□	M12 type connectors (○ represents 4=M12-4P, 5=M12-5P, 8=M12-8P; △ represents: 1=1NO,2=1NC,3=1NO1NC; □ Indicates: None: ungrounded. G: grounded	 RVV 0.3mm²

*The above special specifications, customized production according to order, product nameplate production for laser marking process; The universal model nameplate process is pad printing process.

International Certification Specifications

Certification specifications	Specifications	Document
CCC	GB/T14048.5	Please consult the CNTD Representative Office
TUV	IEC60947-5-1	

Safety Specification Certification Rating CCC(GB/T14048.5)、TUV(IEC60947-5-1)

Type and Rating
AC-15 1.5A/240V Resistive load
DC-13 0.1A/250V Resistive load

Characteristics


Protection level		IP67
Life	Electrical	More than 500,000 times (DC-13 24V 0.125A), more than 300,000 times (AC-15 240V 1.5A)
Operating speed		1mm-0.5m/s
Operating frequency		Electrical: 30 operations/min
Contact resistance		Less than 150mΩ (initial value of 1m cable), less than 200mΩ (initial value of 2m cable), less than 350mΩ (initial value of 5m cable)
Insulation resistance		100MΩ min.(at 500VDC)
Minimum working load		100mA resistive load below DC24V
Rated insulation voltage (Ui)		400V complies with IEC60947-5-1
Electric shock protection grade		Class II (double insulated)
Pollution degree (Using conditions)		Pollution degree 3 (IEC60947-5-1)
Withstand voltage (IEC60947-5-1)		Between homopolar terminals: 2.5kV
		Between heteropolar terminals: 4kV
		Between terminals and uncharged metal parts: 4kV
Contact gap		Minimum 4*0.5mm quick action type
Vibration	Malfunction	10~55Hz 1.5mm double amplitude
Impact	Duration	1,000m/s ²
	Malfunction	300m/s ²
Ambient temperature		Using: -25~+70℃ (With no icing)
Ambient humidity		Less than 95% RH
Weight		Approx 140g (C6N-P104L1), Approx 110g (C6N-P122L1)

Operating Characteristics


Model	C6N-P	111/117L1	122/123/ 124/125L1	115/116L1	104/115/ 107/108/109L1	166/167/ 168/169L1
Operating Force	OF(Max.)	8.5N	8.5N	7N	5N	1.5N
Release Force	RF(Min.)	0.4N	0.4N	0.4N	0.4N	/
Pre-Travel	PT(Max.)	2mm	2mm	3mm	25°	20°
Over Travel	OT(Min.)	3mm	6mm	/	65°	/
Movement Differential	MD(Max.)	1mm	1mm	1.6mm	12°	10°
Operating Position	OP(mm.)	/	/	/	/	/
Total travel	TT	5mm	8mm	/	90°	/
Forced disconnected pretravel	DOT (Min.)	4.2mm	4.2mm	6.3mm	70°	/
Forced disconnected force	DOF (Min.)	42.5N	42.5N	42.5N	42.5N	/

Appearance and Dimension


C6N-P111L1

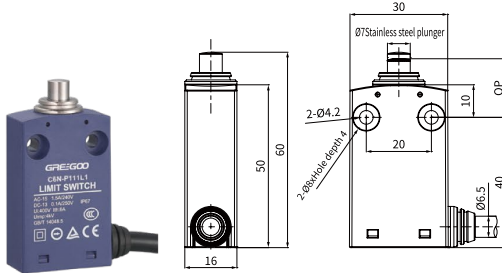


C6N-P122L1

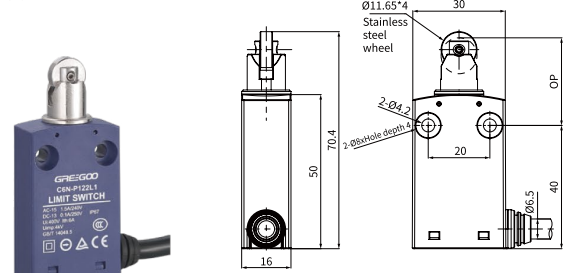


C6N-P115L1

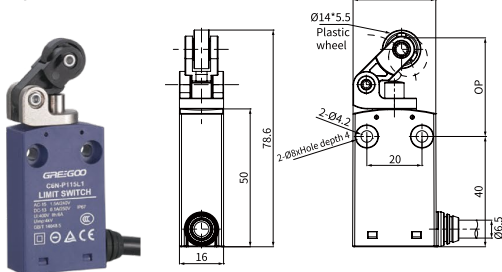


C6N-P116L1

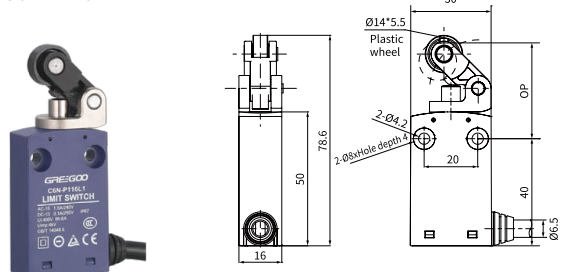


C6N-P104L1

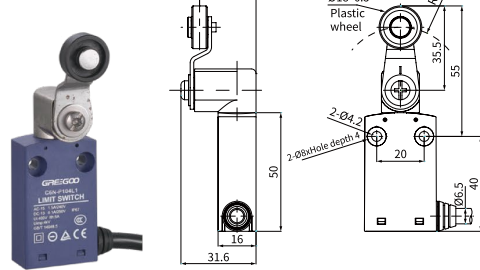


C6N-P105L1

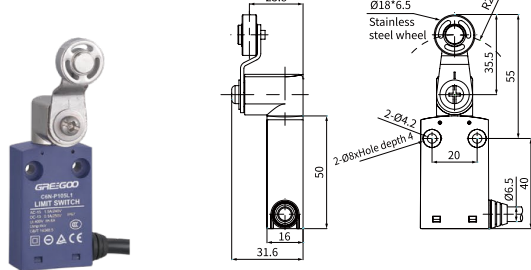


C6N-P107L1

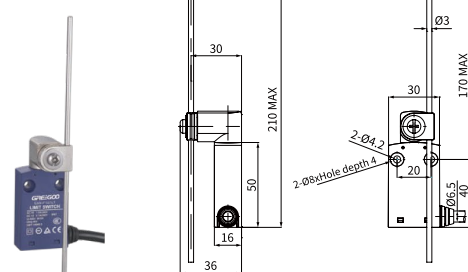


C6N-P108L1

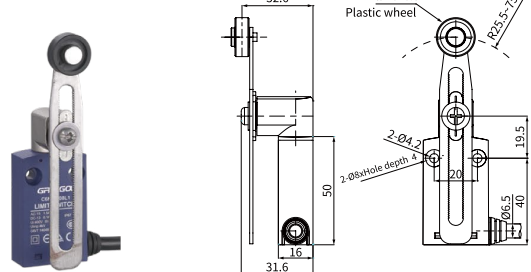

C6N-P109L1

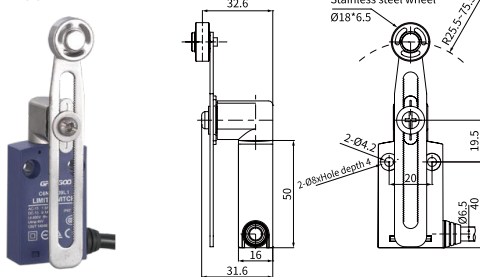


C6N-P117L1

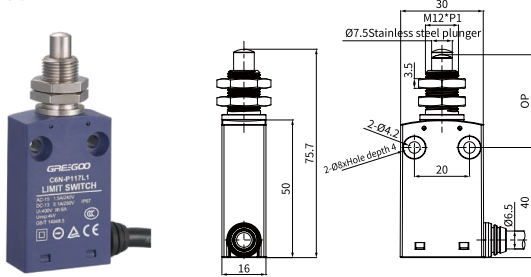


Appearance and Dimension


C6N-P123L1

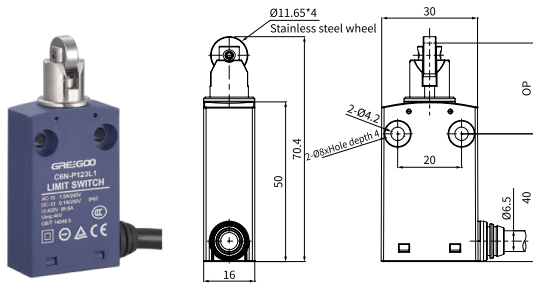


C6N-P124L1

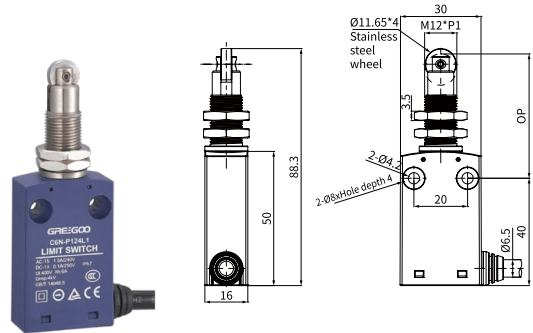


C6N-P125L1

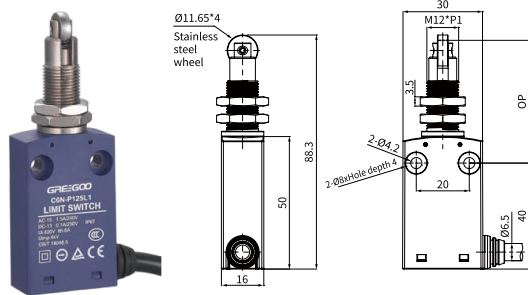


C6N-P166L1

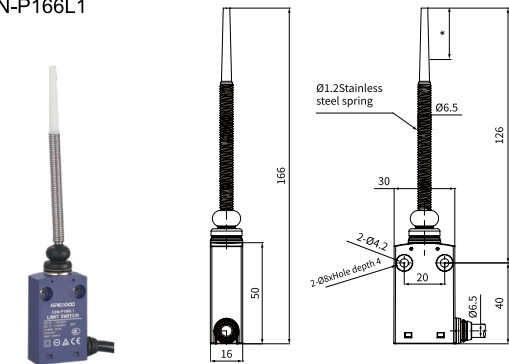


C6N-P167L1

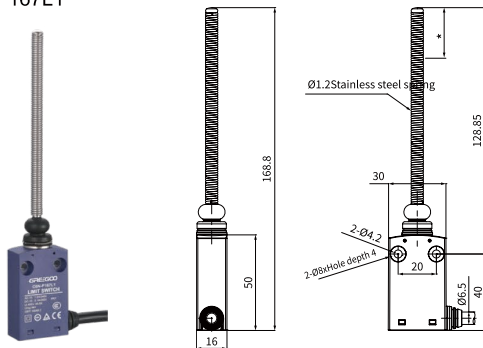

C6N-P168L1

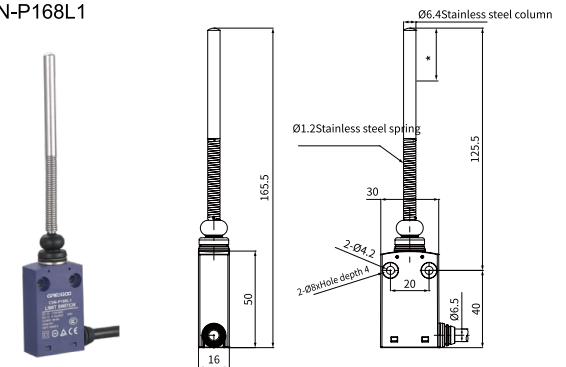


C6N-P169L1

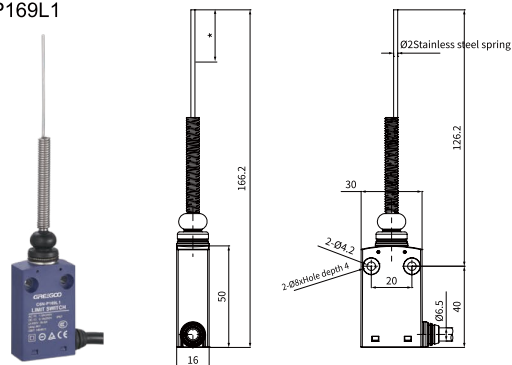

About Using the Environment

The sealing material can be spoiled. Please confirm the actual usage conditions before determining the maintenance and replacement time. Please install the switch in a location that will not directly come into contact with chips or dust. It is necessary to ensure that the drive, the moving rod and switch body will not accumulate cutting chips and mud-like substances.

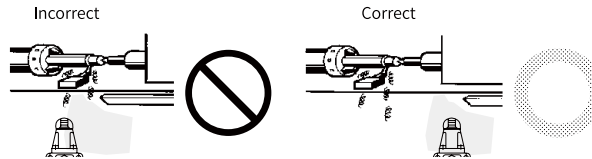

When the switch is subjected to continuous vibration and impact, the generated wear powder may cause contact connection poor contact, abnormal movement, decreased durability, and other issues. In addition, if there is excessive vibration and impact, which may cause contact malfunction and damage, so please install it in a position that will not be subjected to vibration and impact, and in a direction that will not resonate.


The switch has physical contacts. If silicon gas is present in the environment, the arc energy will cause Silicon dioxide (SiO₂) to accumulate on the contacts, resulting in poor contact.

There is silicone oil around the switch. When using silicon fillers, silicon wires, and other silicon products, please use contact protection circuits to suppress arcing and eliminate the source of silicon gas generation.


Operate

The operating method, shape of the cam or stop, operating frequency, and overtravel all significantly affect the service life and the accuracy of the limit switch. Due to this reason, the angle of the stop must be below 30°, the surface roughness of the stop must be above 6.3 S, and the hardness must be Hv 400 to 500.

To ensure the correct movement of the plunger type drive rod, adjust the stop and cam to the correct setting position. The correct position is the position where the plunger groove matches the top of the sleeve.

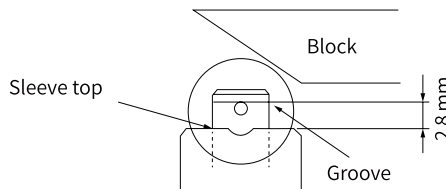

To allow the ball swing rod type drive rod to move correctly, adjust the stop and cam so that the arrow is positioned between the two protruding marks, as shown below.

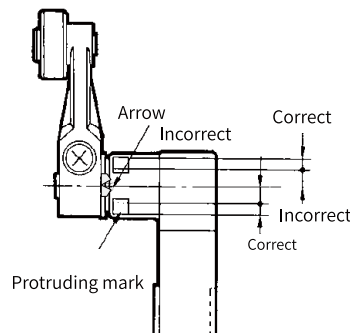


On the Use of Small Load Models

The use of a general load switch in the switching of a small load circuit will cause contact failure. The use of small load type, if the switch will occur surge current load, will also aggravate the contact consumption, shorten the service life, so please insert the necessary contact protection circuit. The minimum applicable load is the N-level reference value. This represents the level of the fault level at a reliability level of 60% ($I \lambda 60$). $\lambda 60=0.5 \times 10^{-6} / \text{time}$ indicates that the presumed failure rate is less than 1/2,000,000 at a reliable level of 60%.

Precautions for use

Switch contacts can be used for general loads or small loads. However, contacts that have already been connected to general loads cannot be used to connect smaller capacity loads. Otherwise, it may lead to roughness of the contact surface and loss of contact reliability.

Mounting hole




Plunger type may malfunction due to harsh environments, such as dust or cutting debris causing poor reset. In this case, please use a model with a rubber cap.

Do not come into contact with water exceeding 70 ° C or use under steam.

Tighten each screw to the corresponding torque according to the table below.

Number	Types of	Correct tightening torque*
1	M4 swing rod mounting screws	1.2~1.4N·m
2	M4 installation torque	0.6~0.8N·m

*By removing two screws from the head, the head direction can be rotated 180 ° . When changing the direction of the head Then tighten to the torque specified above. Be careful not to allow any impurities to enter the switch.

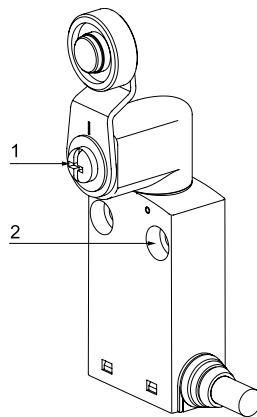

Wiring precautions

Do not wire the switch while it is powered on. Otherwise, it may cause electric shock.

When wiring, do not allow small wires or other particles to enter the switch body.


When connecting terminals through insulated pipes and M3.5 crimping terminals, please configure the crimping terminals as shown in the figure to ensure that they are not pressed onto the outer shell or cover.

The applicable wire size is: AWG20~AWG18 (0.5~0.75mm²).

Please use wires of appropriate length for wiring. Otherwise, it may cause the outer cover to arch or fail to secure properly.

Do not insert crimped terminals into the gaps in the casing, as this may cause damage or deformation to the casing.

To avoid contact between the terminals and the inside of the switch housing, please use terminals with a thickness of less than 0.5mm.

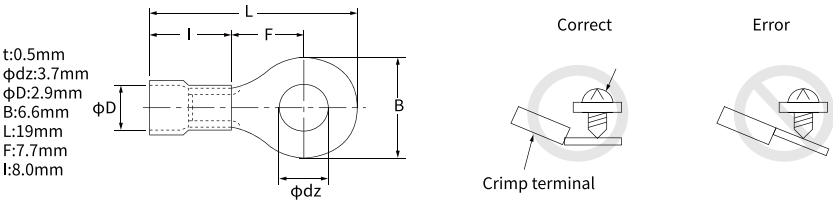

Applicable conductor

Wire name	Using wires		
	Number of cores	Conductor	Nom OD
Plastic rubber insulated flexible wire	2-core 3-core 4-core	0.75mm ²	Circular φ 6~ φ 9
600V plastic insulation Plastic sheathed cable	2-core	φ 1/ φ 1.2/ φ 1.6	

Note: If it contains silicon, it may cause poor contact. Please do not use it.

Actuators available

Direct movement :


A
 Steel plunger

A/S1
 Steel plunger with
 rubber gasket


B
 Steel roller
 plunger

C
 Thermoplastic
 roller lever, side
 actuation

C/S1
 Thermoplastic roller
 lever, with rubber
 gasket, side actuation

D
 Thermoplastic roller
 lever, vertical actuation

D/S1
 Thermoplastic roller
 lever, with rubber gasket,
 vertical actuation

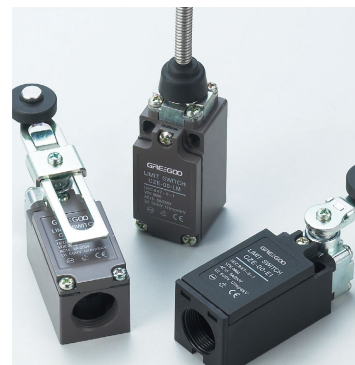R
 Reversible, adjustable
 thermoplastic roller lever

Angular movement

E-E/RA
 Side rotary lever
 with plastic or
 steel roller

I-I/RA
 Offset side rotary
 lever with plastic
 or steel roller

E/50
 Side rotary lever with
 rubber roller 50 dia.

I/50
 Side rotary bent lever
 with rubber roller 50 dia.

F
 Side rotary adjustable
 lever with plastic roller

F/50
 Side rotary adjustable
 lever with rubber
 roller 50 dia.

Multi-directional movement

G/H
 Side rotary adjustable
 plastic glass fiber, G,
 aluminum, H, rod 6
 dia.

Q
 Ceramic
 roller lever

IS
 Offset side rotary
 lever with plastic or
 steel roller

L
 Flexible rod

LP
 Flexible rod with
 plastic terminal

LP
 Flexible rod with
 metal terminal

General feature


Operataing frequency				operat./sec (Hz)	1
Insulation resistance			500 V DC	MΩ	100
Dielectric strength			50/60 Hz per 1*	V AC	2500
Rated insulation voltage		Ui IEC947-5-1		V AC	500
Rated thermal current		Ithe IEC947-5-1		A	10
Rated operating current		IEC 947-5-1/EN60947-5-1			
	Category AC15 A300	Ie	24V	A	10
			125V	A	6
			230V	A	4
			400V	A	3
	Category DC13 Q300	Ie	24V	A	10
			48V	A	4
			120V	A	1
			250V	A	0.4
Contact resistance		IEC255-7 cat.3	initial value	MΩ	25
Short circuit protective devices		IEC269(IEC947-5-1) gl or gG type fuse		A	10
Rated conditionals short circuit current		IEC947-5-1		A	100
Pollution degree		IEC947-5-1			3
Protection degree		EN 60529		IP	66
Protection against electric shock			plastic	class	II
			metal	class	I
Vibration resistance		IEC68-2-6		mm	0.35 ± 15%(10 ÷ 55 Hz ± 1 Hz)
Shock resistance		IEC68-2-27 11 ms		g	30
Mechanical life				cycles min	15.000.000
Electrical life		at 250VAC 6A with resistance load cos β =1		cycles min	500.000
		at 250VAC 6A with resistance load cos β =0.4		cycles min	500.000
Distance between contacts		snap action type		mm	2 × 1, 25
		low action type		mm	2 × 2
Terminals		type			Screw with combined notch and retravtable plate
					(notch Ph. size 1)
		screw		M	3, 5
		protection degree		IP	20A
		material			Steel class 8.8/Galvanized
		Max. screw tightening torque		N cm (kg cm)	120(12, 24)
		max connecting capacity	rigid cable	mm²	2 × 1, 5
			flexible cable	mm²	2 × 1, 5
		with prod terminal		mm²	1 × 1, 5
terminal numbering			In accordance with EN50013		

Contact block


1 NO+1 NC	fast action	00
1 NO+1 NC	slow action	01
1 NO+1 NC	slowe overlapping action	02
2 NO	slow action	03
2 NC	slow action	04
2 NC	fast action	05
2 NO+2 NC	fast action	000(excluded E200) 000(E200 Excluded)
1 NO+3 NC	slow action	80 (model E400 only) 80(E400)
2 NO+2 NC	slow action	81 (model E400 only) 81 (E400)

Plastic Version


CZE-00-AI

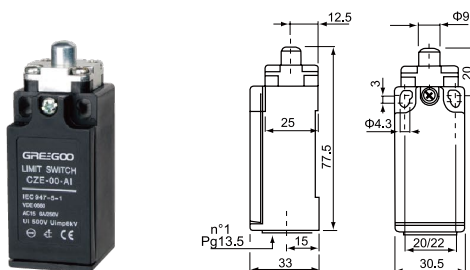


CZE-00-AI/SI

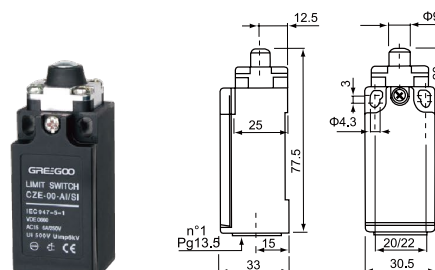


CZE-00-BI

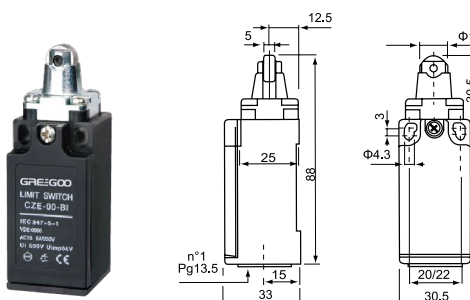


CZE-00-CI

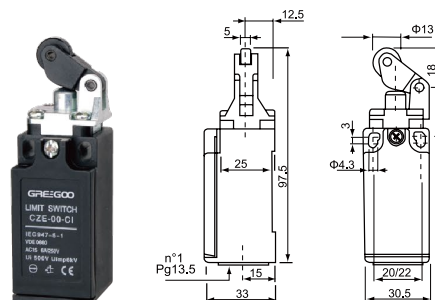


CZE-00-CI/SI

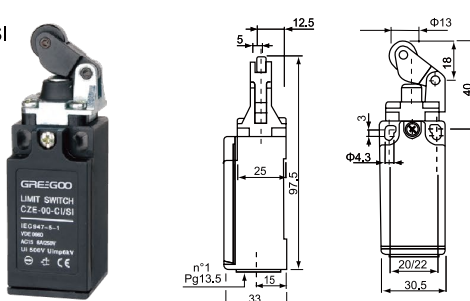


CZE-00-DI

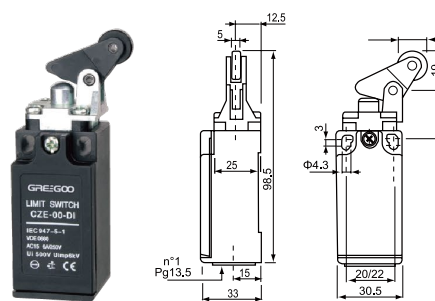


CZE-00-DI/SI

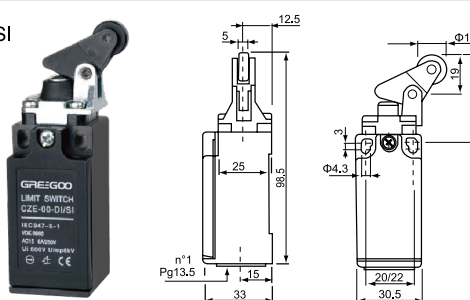


CZE-00-EI

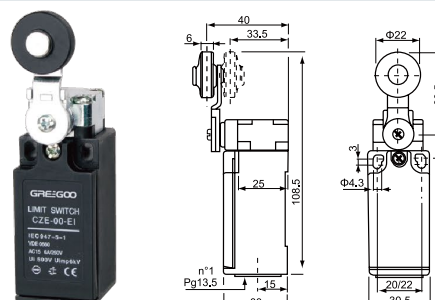

CZE-00-II

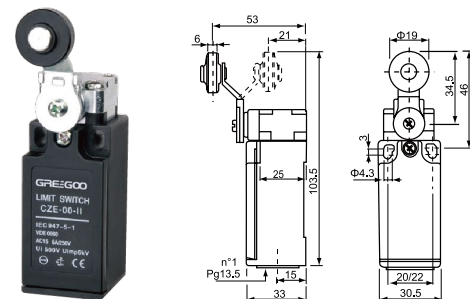


CZE-00-EI/50

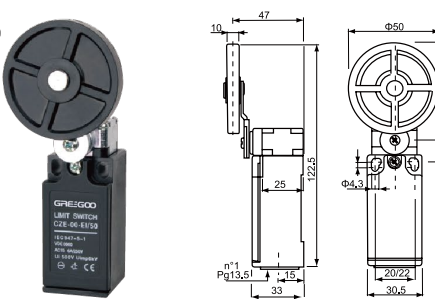


Plastic Version

47


CZE-00-II/50

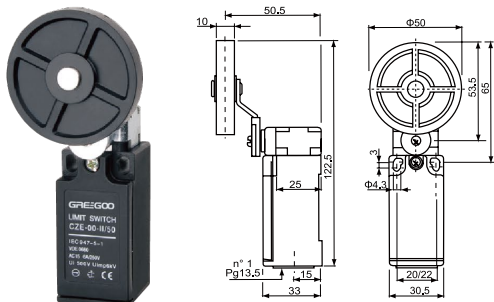


CZE-00-FI

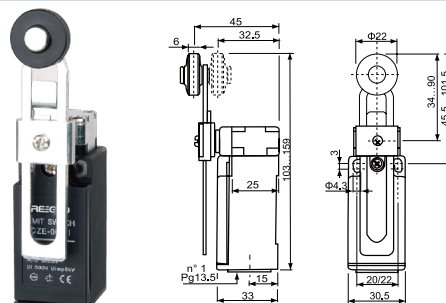


CZE-00-FI/50

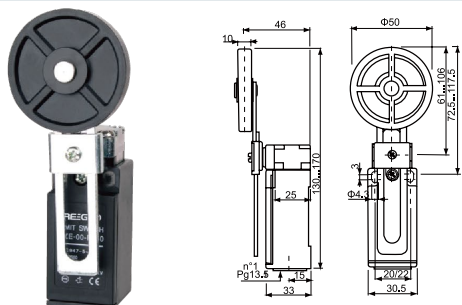


CZE-00-GI

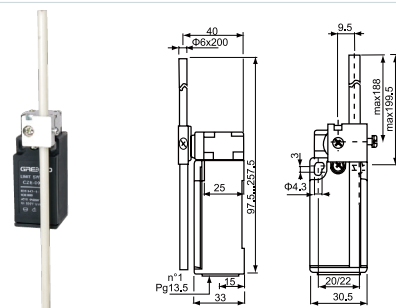


CZE-00-RI

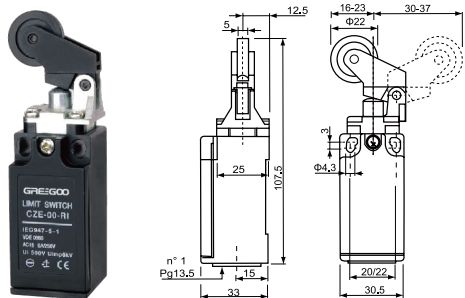


CZE-00-LI

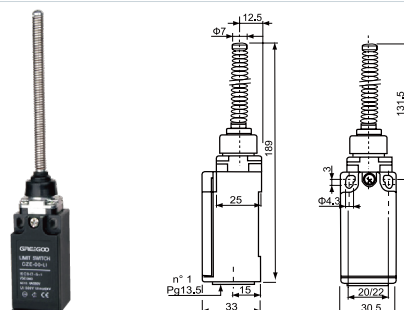


CZE-00-LPI

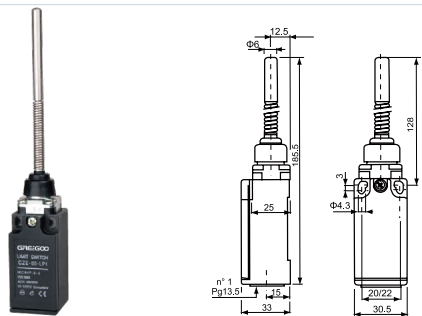


CZE-00-LSI

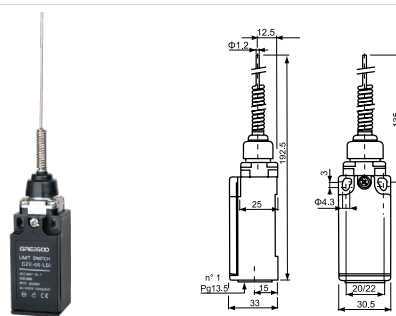

CZE-00-QI

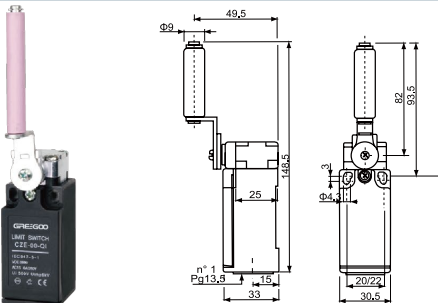


CZE-00-FRI/50

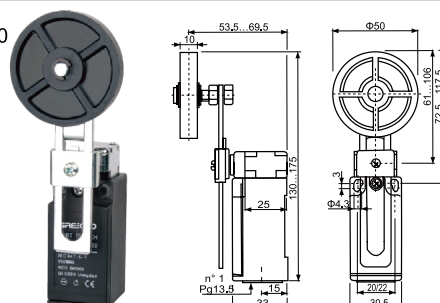


Metal Version


CZE-00-AM

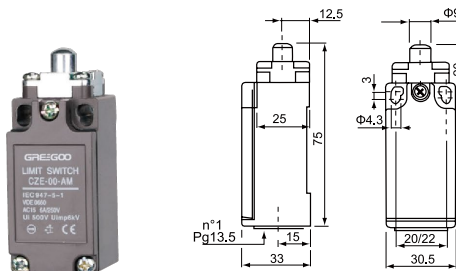


CZE-00-AM/SI

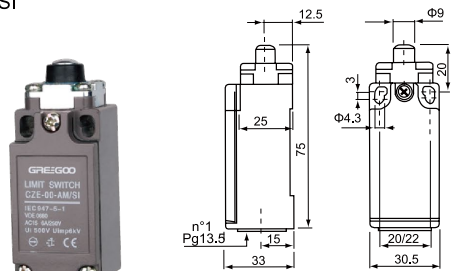


CZE-00-BM

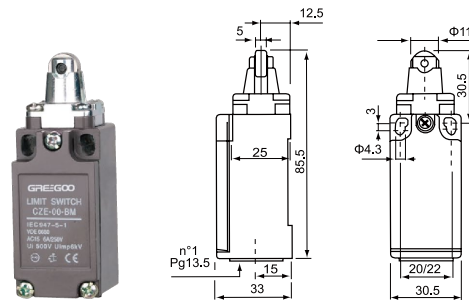


CZE-00-CM

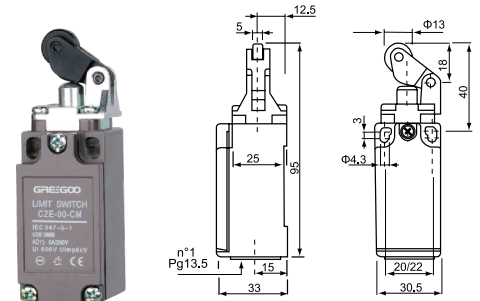


CZE-00-CM/SI

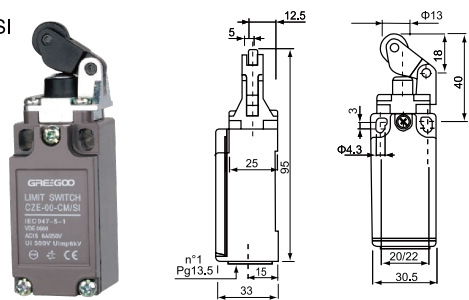


CZE-00-DM

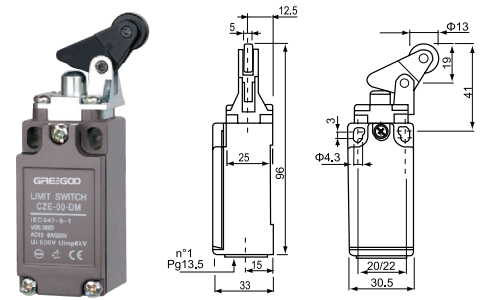


CZE-00-DM/SI

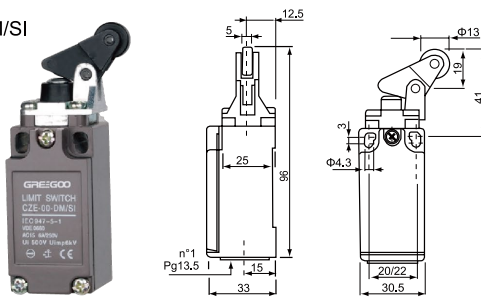


CZE-00-EM

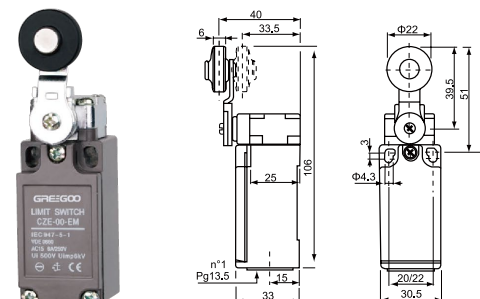

CZE-00-IM

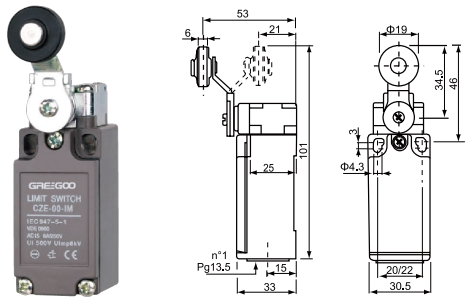


CZE-00-EM/50

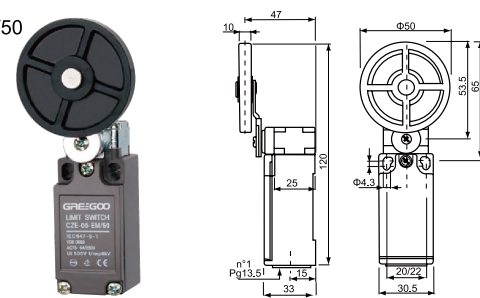


Metal Version


CZE-00-IM/50

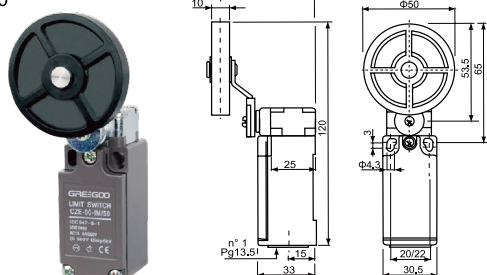


CZE-00-FM

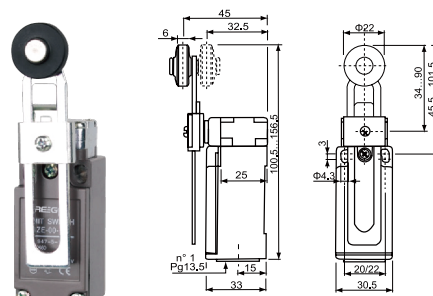


CZE-00-FM/50

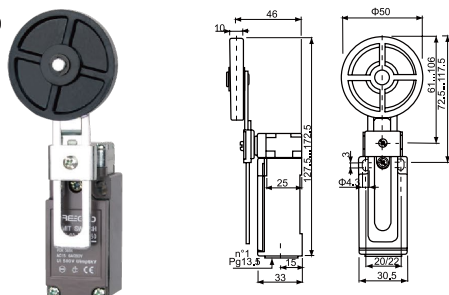


CZE-00-GM

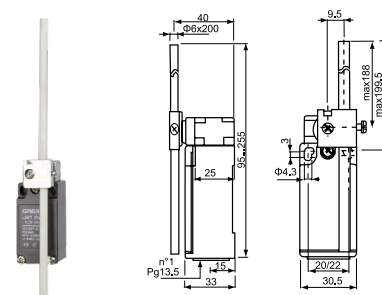


CZE-00-RM

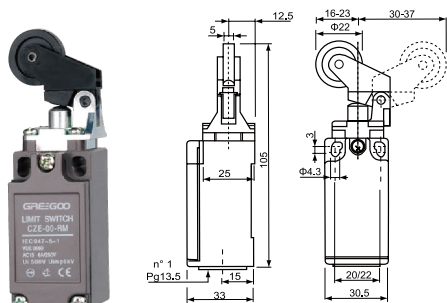


CZE-00-LM

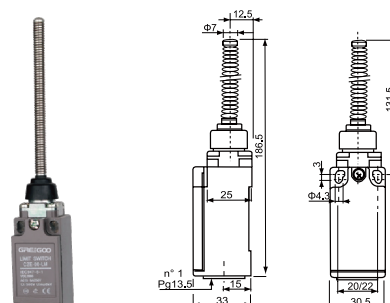


CZE-00-LPM

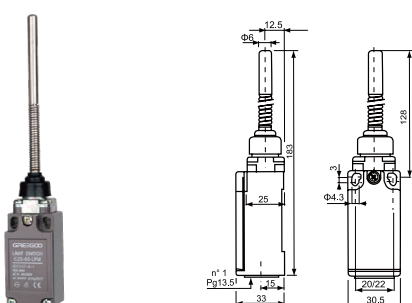


CZE-00-LSM

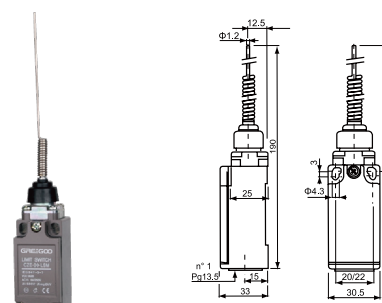

CZE-00-QM

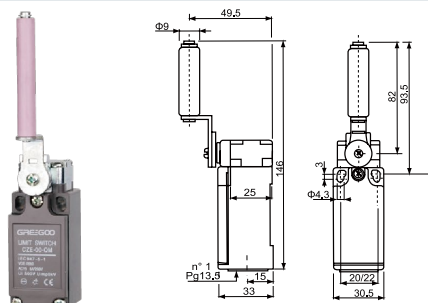


CZE-00-FRM/50

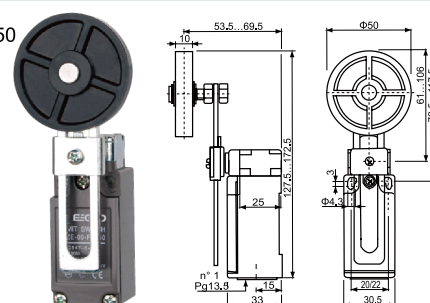

Features

- Various actuators and some with adjustable operating position (such as CZ-7121)
- Shell covered with intensive plastic for water-proof and oil-proof. The mechanical strength is better than CM series of horizontal limit switch

Contact Form



Ratings

Rated Voltage	Noninductive Load (A)				Inductive Load (A)			
	Resistance Load		Lamp Load		Inductive Load		Motor Load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	10		3	1.5	10		5	2.5
250VAC	10		2.5	1.25	10		3	1.5
480VAC	3		1.5	0.75	2.5		1.5	0.75
8VDC	10		3	1.5	6		6	5
14VDC	10		3	1.5	6		6	5
30VDC	8		3	1.5	6		5	2.5
125VDC	0.5		0.4	0.4	0.05		0.05	0.05
250VDC	0.25		0.2	0.2	0.03		0.03	0.03

NOTES: 1. Inductive load has a power factor of 0.4 min.(AC) and a time constant of 7 msec.max.(DC).
 2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 6 times the steady-state current.
 3. Product with spring, its usable range of operating part is within one third of the whole spring length from the front end of spring.

Specifications


Operation speed	0.05mm-0.5m/s
Operating frequency	Electrical: 20 operations/min.
Contact resistance	25mΩ max. (initial value)
Insulation resistance	100mΩ above(at 500VDC)
Dielectric strength	1000VAC, 50/60 Hz for 1 minute between terminals of the same polarity
	1500VAC, 50/60 Hz for 1 minute between current-carrying and non-current-carrying metal parts
	1500VAC, 50/60 Hz for 1 minute between each terminal and ground
Vibration	Malfunction Duration: 10-55Hz, 1.5mm double amplitude
Shock	Mechanical durable: 1,000m/Sec ² (about 100g's) Malfunction: 300m/Sec ² (about 30g's)
Ambient temperature	Using: -20~+70℃ (With no icing)
Humidity	< 95% RH
Electrical life	500,000 operations above
Weight	About 60g

Operating Characteristics


Model	CZ-7	CZ-7100	CZ-7110	CZ-7310	CZ-7311	CZ-7312	CZ-7120	CZ-7140	CZ-7121	CZ-7141	CZ-7124	CZ-7144	CZ-7166
Operating force	OF(Max.)	600g	600g	600g	600g	600g	150g	220g	180g	240g	200g	280g	120g
Release force	RF(Min.)	100g	100g	100g	100g	100g	40g	60g	50g	80g	60g	100g	
Pre-travel	PT(Max.)	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	13.5mm	8.5mm	11.0mm	6.5mm	11mm	6.5mm	250mm
Over travel	OT(Min.)	0.8mm	5.0mm	6.0mm	6.0mm	6.0mm	4.0mm	2.5mm	3.0mm	2.0mm	3.0mm	2.0mm	11mm
Movement differential	MD(Max.)	0.8mm	0.8mm	0.8mm	0.8mm	0.8mm	3.2mm	2.0mm	2.4mm	1.5mm	2.4mm	1.5mm	
Operating position	OP(mm.)	30.5 ± 0.8mm	44 ± 1.2mm	21.8 ± 1.2mm	33.3 ± 1.2mm	33.3 ± 1.2mm	25 ± 1mm	25 ± 1mm	40 ± 1mm	40 ± 1mm	50 ± 1.2mm	50 ± 1.2mm	
Free Position	FP						35mm	32mm		46mm		56mm	

Appearance and Dimension


CZ-7121

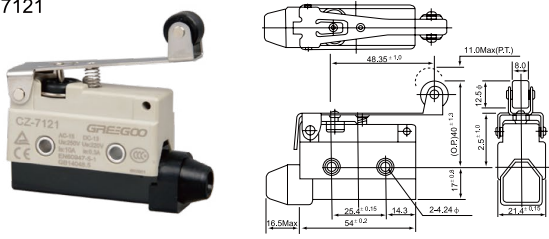


CZ-7141

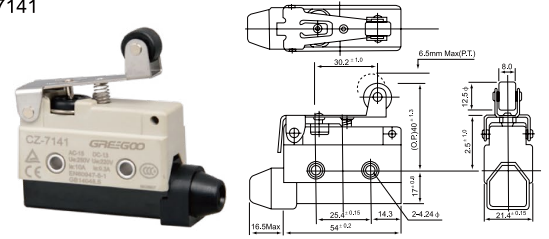


CZ-7120

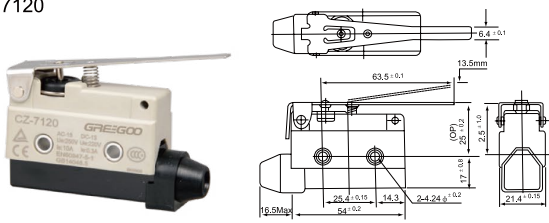


CZ-7140

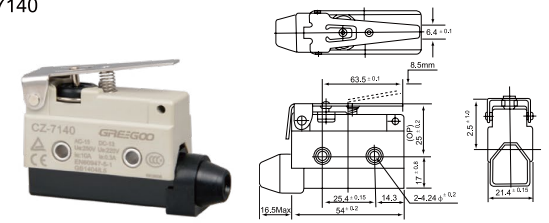


CZ-7124

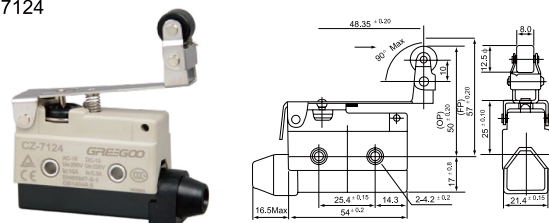


CZ-7144

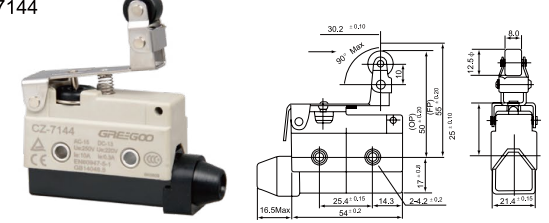


CZ-7100

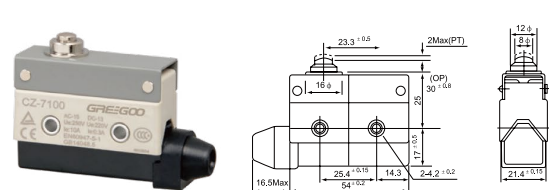


CZ-7110

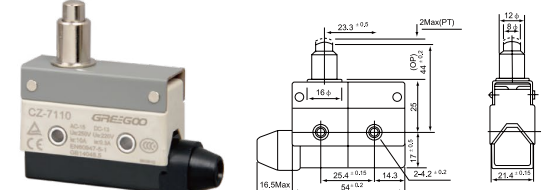


CZ-7310

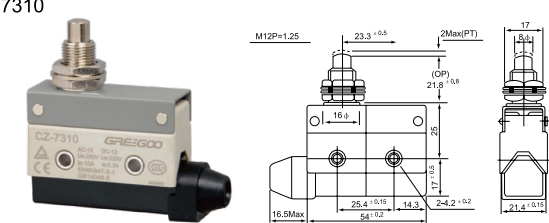

CZ-7311

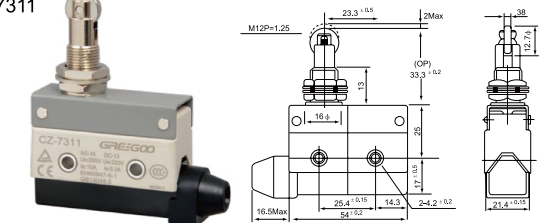

CZ-7312

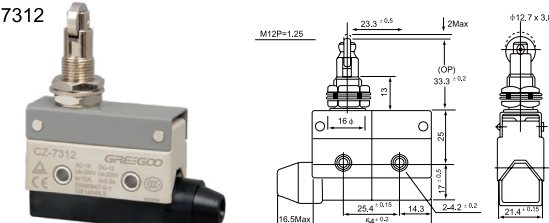

CZ-7166

