


Model description

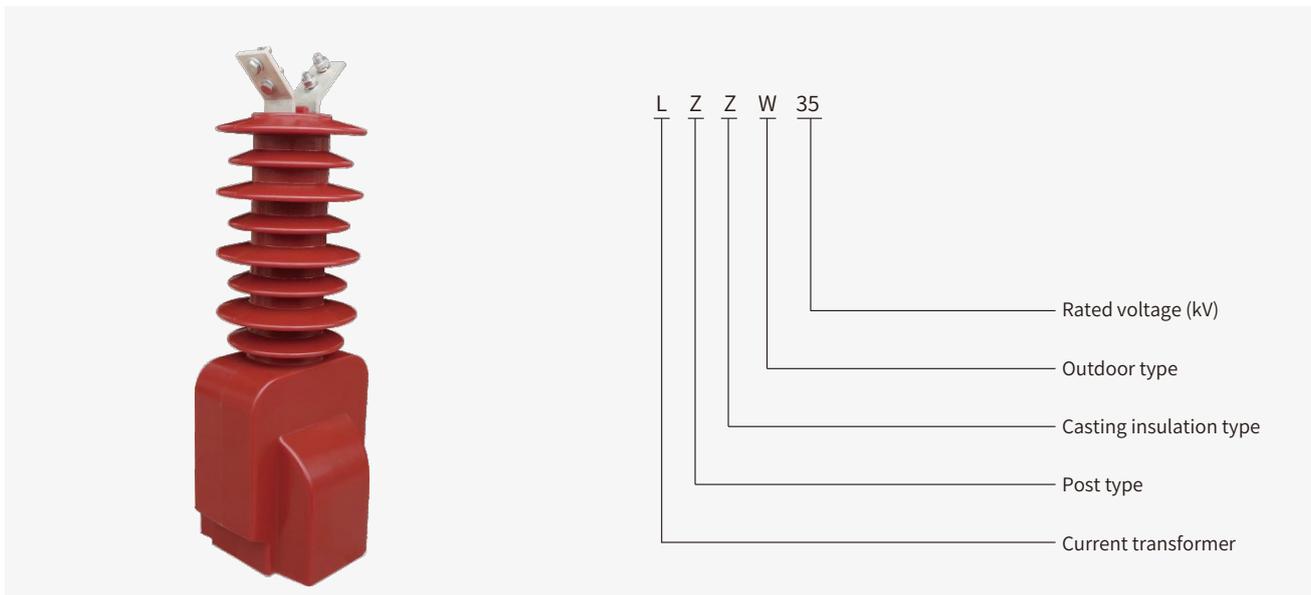

Technical data

Rated primary current (A)	Accuracy Combination	Rated secondary output (VA)			Shortterm thermal current (kA)	Rated dynamic current(kA)
		0.2(S)	0.5(S)	5P20		
20-100	0.2(S)/5P20	10	15	15	150	375
150-200					31.5	
300-500	0.5(S)/5P20	15	30	20	31.5/2	80
600-1000					31.5/4	

Overall dimension drawing

