

**T812 3000-36-42**

**Key Parameters**

|                    |           |    |
|--------------------|-----------|----|
| $V_{\text{DRM}}$   | 3600~4200 | V  |
| $I_{\text{T(AV)}}$ | 3000      | A  |
| $I_{\text{TSM}}$   | 46.0      | kA |
| $V_{\text{TO}}$    | 0.98      | V  |
| $r_{\text{T}}$     | 0.19      | mΩ |

**Applications**

- Traction drive
- Motor drive
- Industry converter

**Features**

- Double-side cooling
- High power capability
- Low loss


**Thermal & Mechanical Data**

| Symb.             | Parameter                              | Min | Type | Max   | Unit  |
|-------------------|----------------------------------------|-----|------|-------|-------|
| $R_{\text{thjc}}$ | Thermal Resistance<br>Junction to Case | -   | -    | 0.007 | K / W |
| $R_{\text{thcs}}$ | Thermal Resistance<br>Case to Heatsink | -   | -    | 0.002 | K / W |
| $T_{\text{vj}}$   | Junction Temperature                   | -40 | -    | 125   | °C    |
| $T_{\text{stg}}$  | Storage Temperature                    | -40 | -    | 140   | °C    |
| $F$               | Mounting Force                         | -   | 70   | -     | kN    |
| $m$               | Weight                                 | -   | 1.4  | -     | kg    |

**Voltage Ratings**

| Device Type  | $V_{\text{DRM}}/V_{\text{RRM}}(\text{V})$ | Test Conditions                                                                                   |
|--------------|-------------------------------------------|---------------------------------------------------------------------------------------------------|
| T812 3000-36 | 3600                                      | $T_{\text{vj}} = 125\text{ °C}$                                                                   |
| T812 3000-38 | 3800                                      | $I_{\text{DRM}} = 400\text{ mA}$                                                                  |
| T812 3000-40 | 4000                                      | $I_{\text{RRM}} = 400\text{ mA}$                                                                  |
| T812 3000-42 | 4200                                      | $V_{\text{DM}} = V_{\text{DRM}}, V_{\text{RM}} = V_{\text{RRM}}$<br>$t_{\text{p}} = 10\text{ ms}$ |
|              |                                           | $V_{\text{DSM}} = V_{\text{DRM}}$<br>$V_{\text{RSM}} = V_{\text{RRM}} + 100$                      |

**Outline**

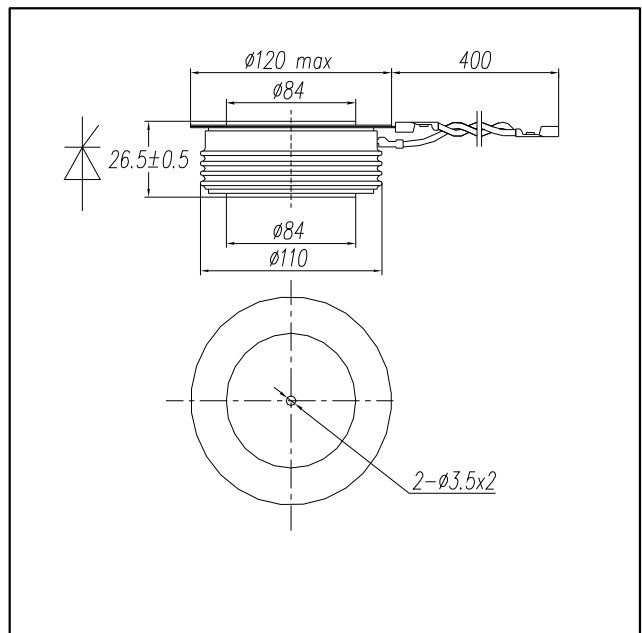

**Current Ratings**

| Symb.               | Parameter                               | Test Conditions                                                         | Min | Type | Max  | Unit                         |
|---------------------|-----------------------------------------|-------------------------------------------------------------------------|-----|------|------|------------------------------|
| $I_{\text{T(AV)}}$  | Mean On-State Current                   | Half Sine Wave, $T_{\text{C}} = 70\text{ °C}$                           | -   | -    | 3000 | A                            |
| $I_{\text{T(RMS)}}$ | RMS On-State Current                    | $T_{\text{C}} = 70\text{ °C}$                                           | -   | -    | 4710 | A                            |
| $I_{\text{TSM}}$    | Surge (non-repetitive) On-State Current | 10ms, Half Sine Wave, $T_{\text{vj}} = 125\text{ °C}, V_{\text{R}} = 0$ | -   | -    | 46.0 | kA                           |
| $I^2 t$             | Limiting load integral                  | Sine Wave, 10ms                                                         | -   | -    | 1058 | $10^4 \text{ A}^2 \text{ s}$ |

**T812 3000-36-42**

**Characteristics**

| Symb.     | Parameter               | Test Conditions                                                   | Min | Type | Max  | Unit       |
|-----------|-------------------------|-------------------------------------------------------------------|-----|------|------|------------|
| $V_{TM}$  | Peak on-state voltage   | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $I_{TM} = 3000\text{ A}$ | -   | -    | 1.55 | V          |
| $I_{DRM}$ | Forward leakage current | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $V_{DRM}$                | -   | -    | 400  | mA         |
| $I_{RRM}$ | Reverse leakage current | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $V_{RRM}$                | -   | -    | 400  | mA         |
| $V_{TO}$  | Threshold voltage       | $T_{vj} = 125\text{ }^{\circ}\text{C}$                            | -   | -    | 0.98 | V          |
| $r_T$     | Slope resistance        | $T_{vj} = 125\text{ }^{\circ}\text{C}$                            | -   | -    | 0.19 | m $\Omega$ |
| $I_H$     | Holding current         | $T_{vj} = 25\text{ }^{\circ}\text{C}$                             | -   | -    | 200  | mA         |
| $I_L$     | Latching current        | $T_{vj} = 25\text{ }^{\circ}\text{C}$                             | -   | -    | 1000 | mA         |

**Dynamic Parameters**

| Symb.    | Parameter                                  | Test Conditions                                                                                                                                                                               | Min  | Type | Max  | Unit              |
|----------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|-------------------|
| $dv/dt$  | Critical rate of rise of off-state voltage | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $0.67V_{DRM}$                                                                                                                                        | 2000 | -    | -    | V/ $\mu\text{ s}$ |
| $di/dt$  | Critical rate of rise of on-state current  | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $V_{DM} = 0.67V_{DRM}$ , $I_{TM} = 3000\text{ A}$<br>$I_{FG} = 2\text{ A}$ , $t_r = 0.5\text{ }\mu\text{ s}$                                         | -    | -    | 1000 | A/ $\mu\text{ s}$ |
|          |                                            | $f = 1\text{ Hz}$<br>$f = 50\text{ Hz}$                                                                                                                                                       | -    | -    | 200  |                   |
| $t_d$    | Delay time                                 | $T_{vj} = 25\text{ }^{\circ}\text{C}$ , $V_{DM} = 0.5V_{DRM}$ , $I_{TM} = 3000\text{ A}$<br>$I_{FG} = 2\text{ A}$ , $t_r = 0.5\text{ }\mu\text{ s}$                                           | -    | -    | 3.0  | $\mu\text{ s}$    |
| $t_q$    | Turn-off time                              | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $V_{DM} = 0.67V_{DRM}$ , $dv/dt = 20\text{ V}/\mu\text{ s}$ , $V_R = 200\text{ V}$<br>$di_T/dt = -1.5\text{ A}/\mu\text{ s}$ , $I_T = 2000\text{ A}$ | -    | 600  | -    | $\mu\text{ s}$    |
| $Q_{rr}$ | Recovery Charge                            | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $di_T/dt = -1.5\text{ A}/\mu\text{ s}$ , $V_R = 200\text{ V}$ ,<br>$I_T = 2000\text{ A}$                                                             | -    | -    | 4000 | $\mu\text{ C}$    |
| $I_{rr}$ | Reverse recovery current                   |                                                                                                                                                                                               | -    | -    | 75   | A                 |

**Gate Parameters**

| Symb.       | Parameter                 | Test Conditions                                             | Min | Type | Max | Unit |
|-------------|---------------------------|-------------------------------------------------------------|-----|------|-----|------|
| $I_{GT}$    | Gate trigger current      | $T_{vj} = 25\text{ }^{\circ}\text{C}$                       | -   | -    | 300 | mA   |
| $V_{GT}$    | Gate trigger voltage      | $T_{vj} = 25\text{ }^{\circ}\text{C}$                       | -   | -    | 3   | V    |
| $V_{GD}$    | Gate non-trigger voltage  | $T_{vj} = 125\text{ }^{\circ}\text{C}$ , $V_D = 0.4V_{DRM}$ | 0.3 | -    | -   | V    |
| $V_{FGM}$   | Peak forward gate voltage |                                                             | -   | -    | 12  | V    |
| $V_{RGM}$   | Peak reverse gate voltage |                                                             | -   | -    | 5   | V    |
| $I_{FGM}$   | Peak forward gate current |                                                             | -   | -    | 4   | A    |
| $P_{GM}$    | Gate power losses         |                                                             | -   | -    | 20  | W    |
| $P_{G(AV)}$ | Gate power losses (mean)  |                                                             | -   | -    | 4   | W    |

T812 3000-36-42

Max. on-state characteristic model

$$V_T = A + B \cdot \ln(I_T) + C \cdot I_T + D \cdot \sqrt{I_T}$$

|   | 25 °C     | 125 °C    |
|---|-----------|-----------|
| A | 1.2740    | 0.600494  |
| B | -0.084396 | 0.0099359 |
| C | 0.0000584 | 0.0001161 |
| D | 0.0126438 | 0.0095825 |

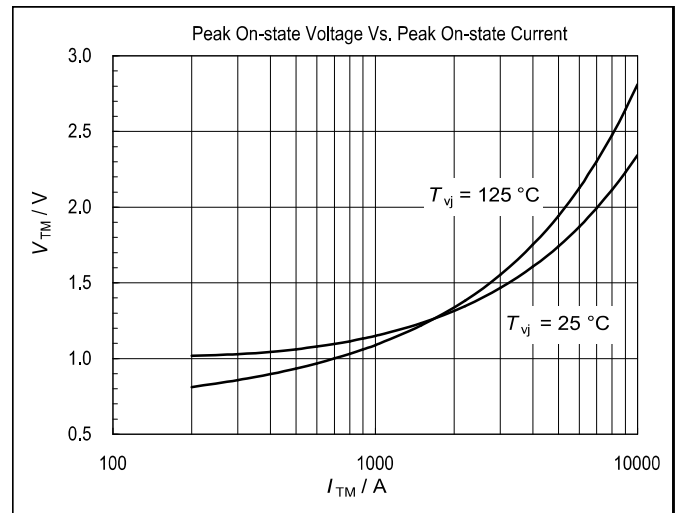


Fig1. Peak On-state Voltage Vs. Peak On-state Current

Transient thermal impedance function  
(double side cooled)

$$R_{thjc}(t) = \sum_{i=1}^n R_{thi} \cdot \left(1 - e^{-\frac{t}{\tau_i}}\right)$$

| i                       | 1      | 2      | 3      | 4      |
|-------------------------|--------|--------|--------|--------|
| R <sub>thi</sub> (K/kW) | 4.701  | 1.401  | 0.611  | 0.298  |
| τ <sub>i</sub> (s)      | 0.5463 | 0.0746 | 0.0087 | 0.0021 |

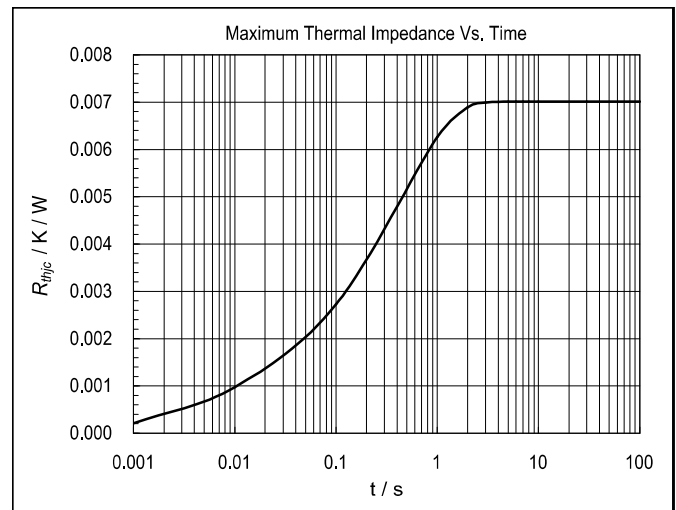


Fig2. Maximum Thermal Impedance Vs. Time

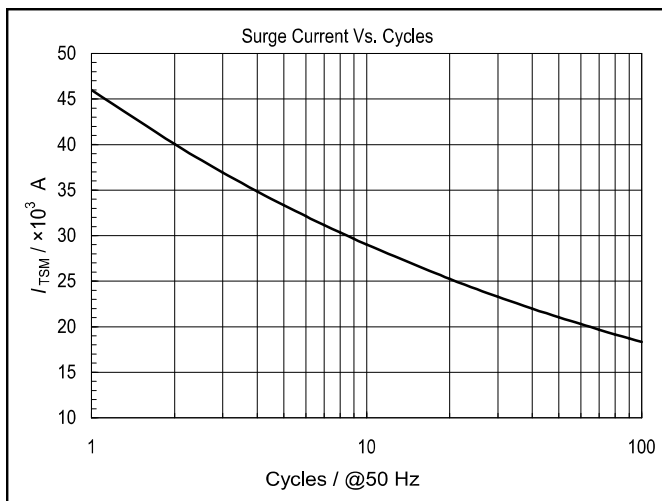


Fig3. Surge Current Vs. Cycles

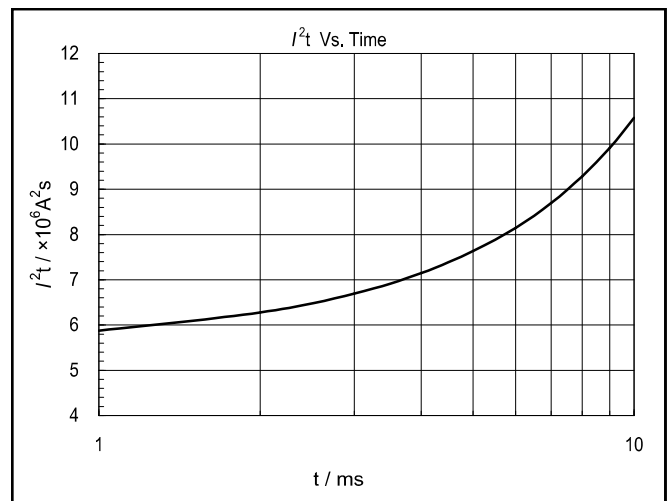


Fig4. I<sup>2</sup> t Vs. Time

T812 3000-36-42

1

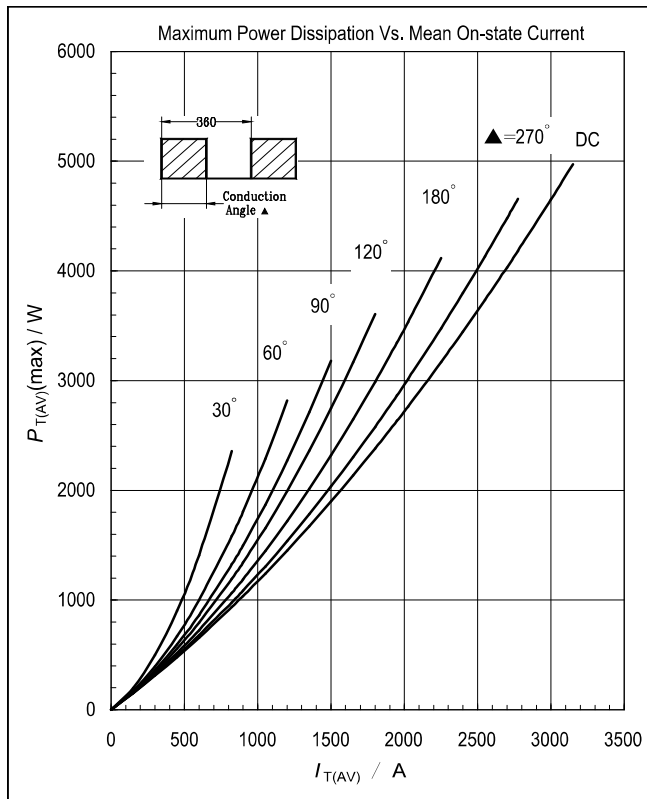


Fig5. Maximum Power Dissipation Vs. Mean On-state Current

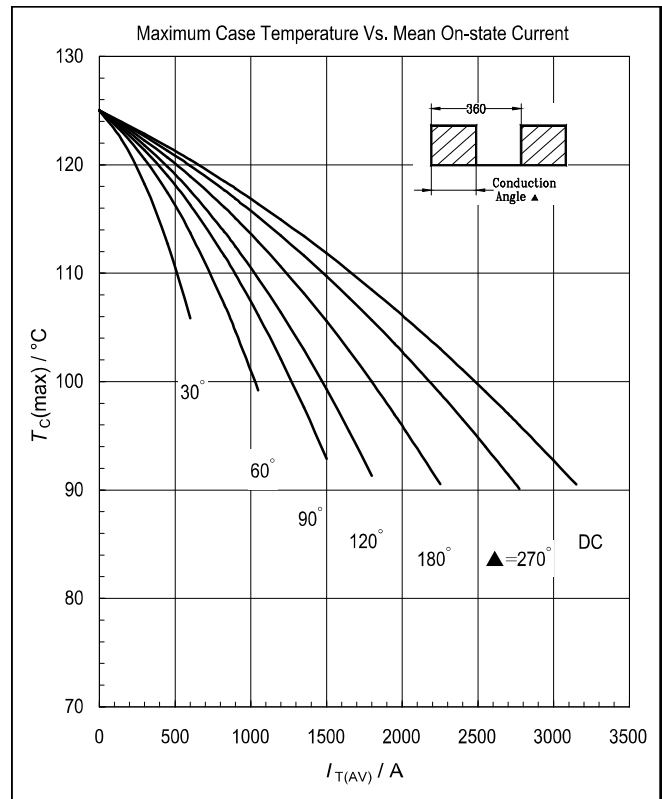


Fig6. Maximum Case Temperature Vs. Mean On-state Current

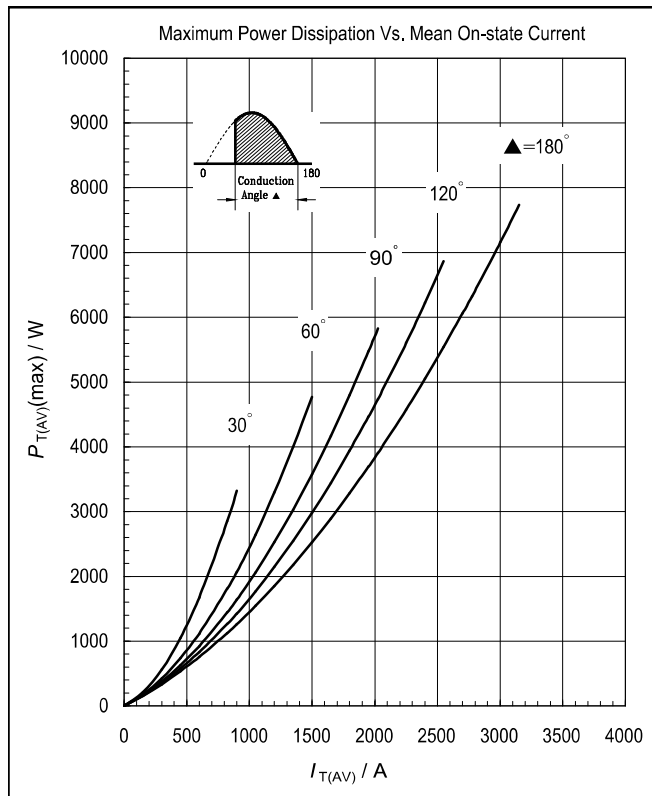


Fig7. Maximum Power Dissipation Vs. Mean On-state Current

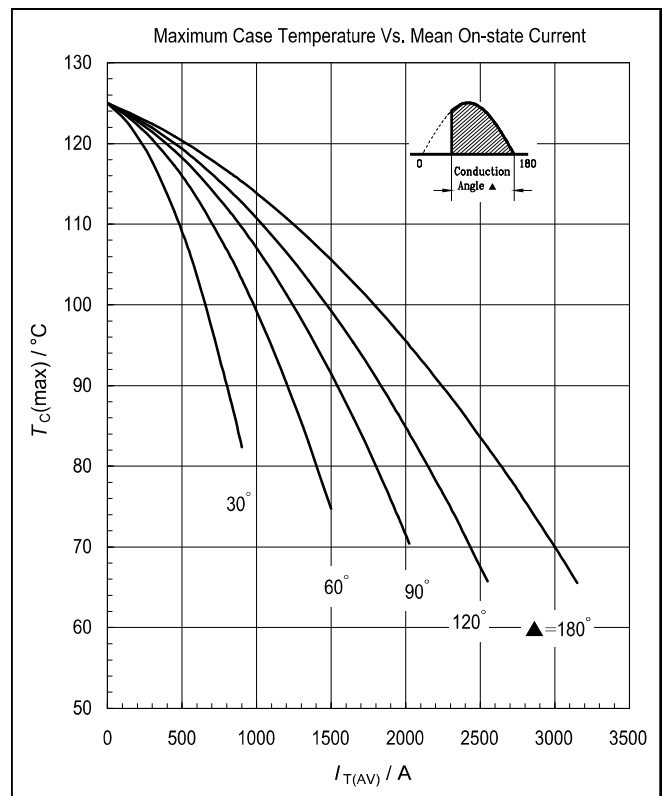


Fig8. Maximum Case Temperature Vs. Mean On-state Current

**T812 3000-36-42**

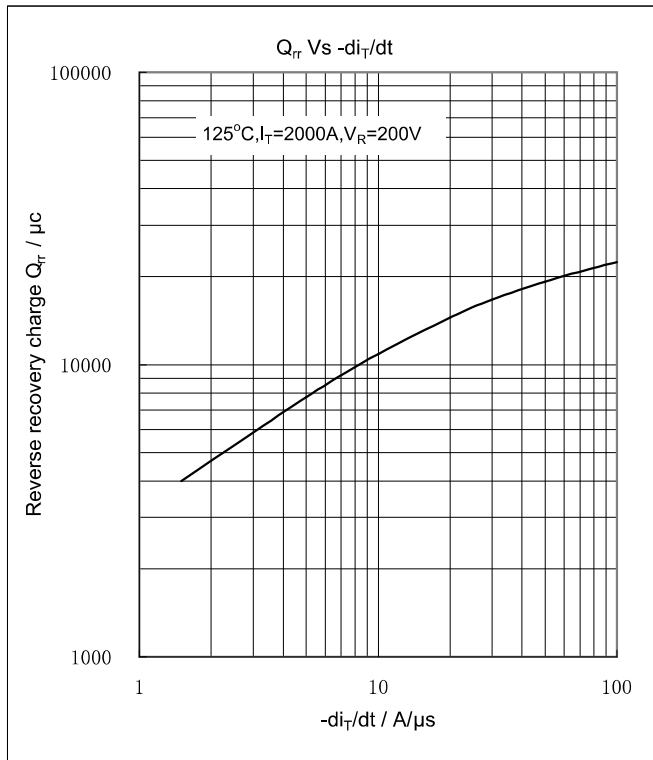


Fig9. Reverse recovery charge Vs.  $-di_T/dt$

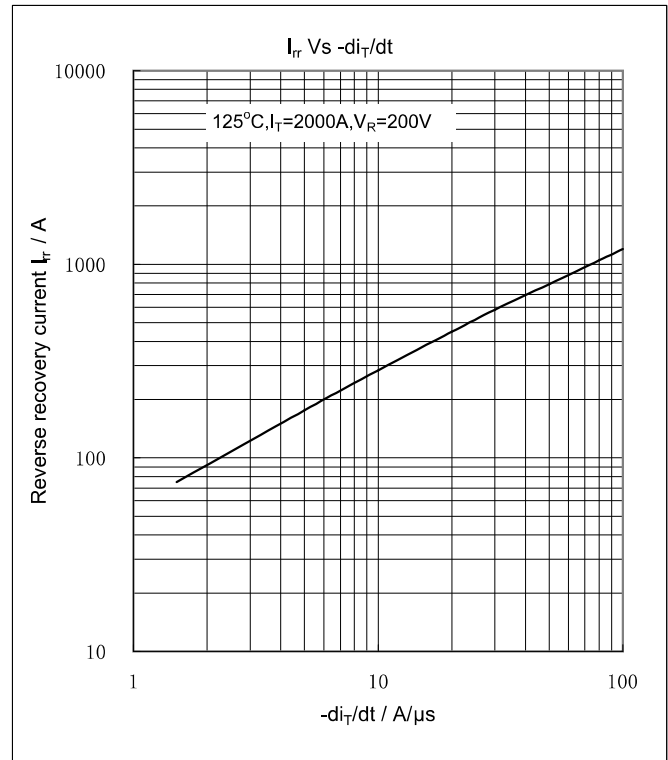


Fig10. Reverse recovery current Vs.  $-di_T/dt$

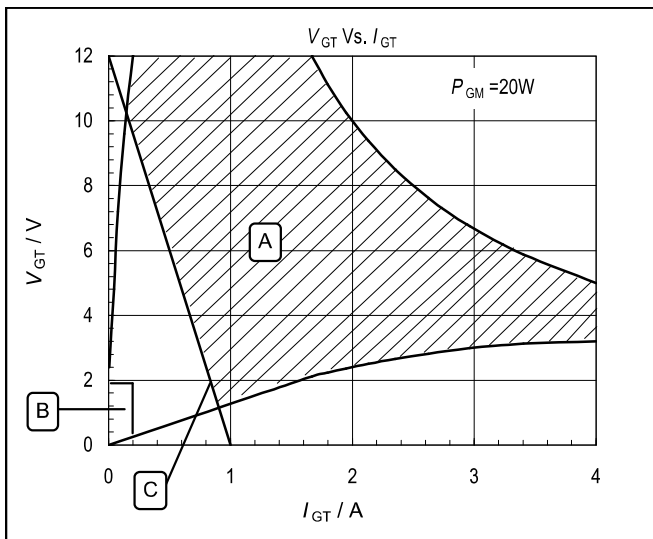


Fig11.  $V_{GT}$  Vs.  $I_{GT}$

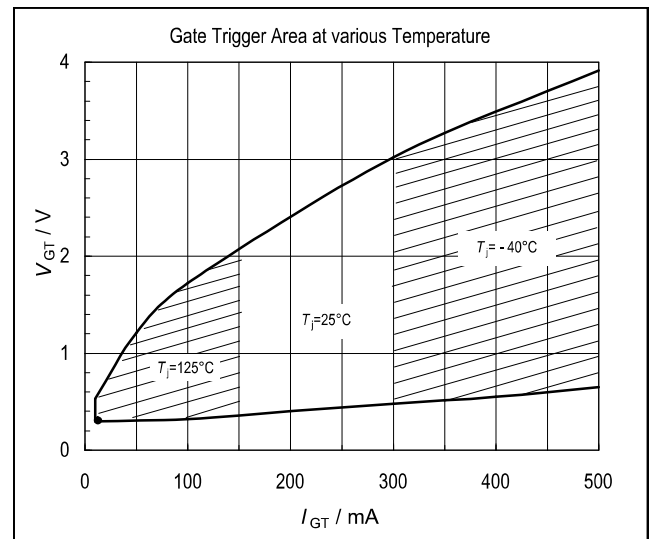


Fig12. Gate Trigger Area at various Temperature

A is Recommended Triggering Area.

B is Unreliable Triggering Area.

C is Recommended Gate Load Line.