


Features

- Heat transfer through aluminum oxide ceramic insulated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E63532

Typical Applications

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors



Absolute Maximum Ratings

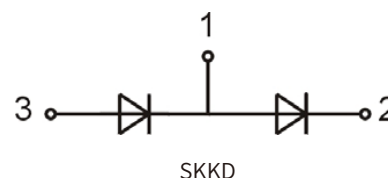

Symbol	Conditions		Values	Unit
Rectifier Diode				
I_{FAV}	sin. 180° $T_j = 135\text{ °C}$	$T_c = 85\text{ °C}$	213	A
		$T_c = 100\text{ °C}$	165	A
I_{FSM}	$t_p = 10\text{ ms}$	$T_j = 25\text{ °C}$	6600	A
		$T_j = 135\text{ °C}$	5500	A
i^2t	$t_p = 10\text{ ms}$	$T_j = 25\text{ °C}$	217800	A ² s
		$T_j = 135\text{ °C}$	151250	A ² s
V_{RSM}	$T_j = 25\text{ °C}$		1300	V
V_{RRM}	$T_j = 25\text{ °C}$		1200	V
T_j			-40 ... 135	°C
Module				
T_{stg}			-40 ... 125	°C
V_{isol}	a.c.; 50 Hz; r.m.s.	1 min	3000	V
		1 s	3600	V

Characteristics

Symbol	Conditions		min.	typ.	max.	Unit
Diode						
V _F	T _j = 25 °C, I _F = 500 A				1.4	V
V _{F0}	T _j = 135 °C				0.75	V
r _F	T _j = 135 °C				1.05	mΩ
I _R	T _j = 135 °C, V _{RD} = V _{RRM}				9	mA
R _{th(j-c)}	cont.	per chip			0.18	K/W
		per module			0.09	K/W
R _{th(j-c)}	sin. 180°	per chip			0.18	K/W
		per module			0.09	K/W
Module						
R _{th(c-s)}	chip, P12 (reference)			0.1		K/W
	module, P12 (reference)			0.05		K/W
M _s	to heatsink M5		4.25		5.75	Nm
M _t	to terminals M6		4.25		5.75	Nm
a					5 * 9.81	m/s ²
w				165		g

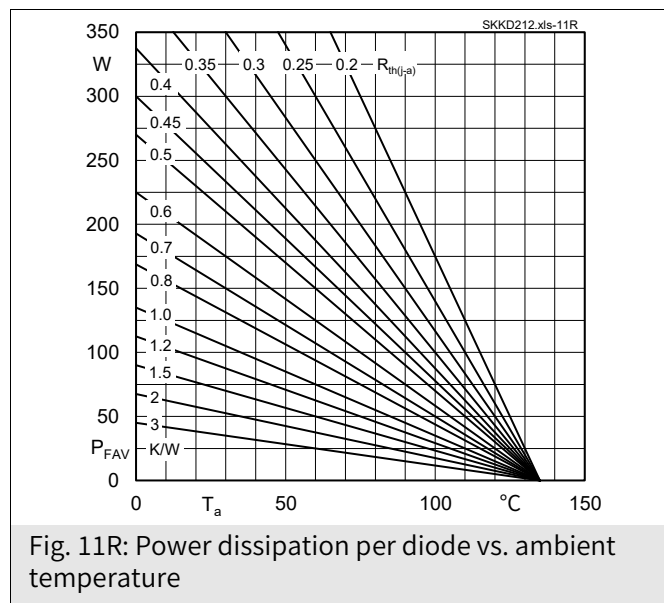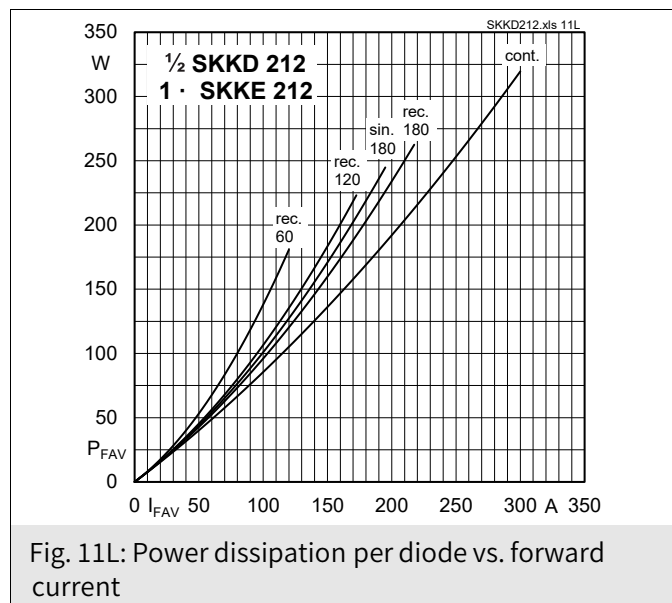

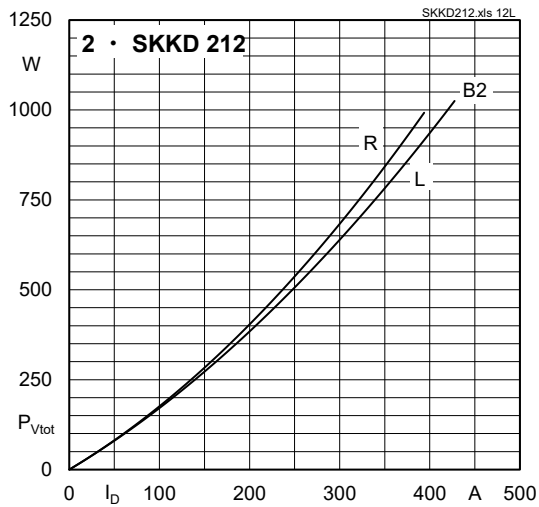


Fig. 12L: Power dissipation of two modules vs. direct current

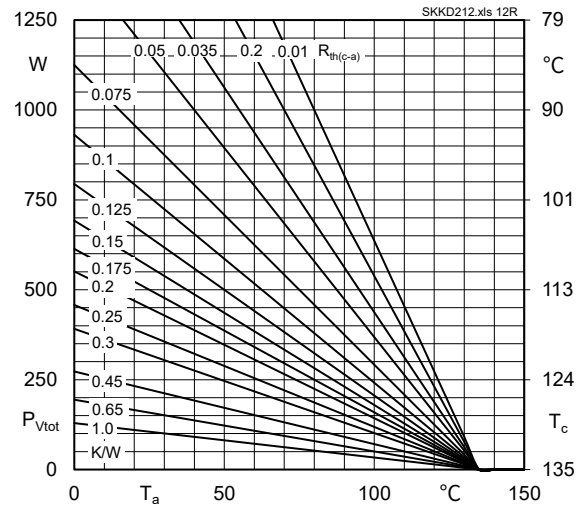


Fig. 12R: Power dissipation of two modules vs. ambient temperature

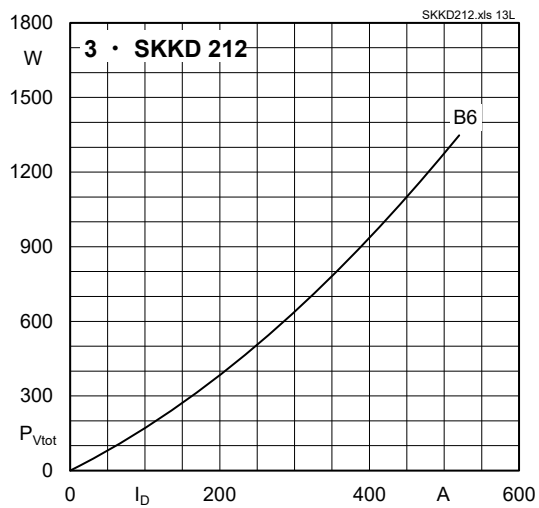


Fig. 13L: Power dissipation of three modules vs. direct current

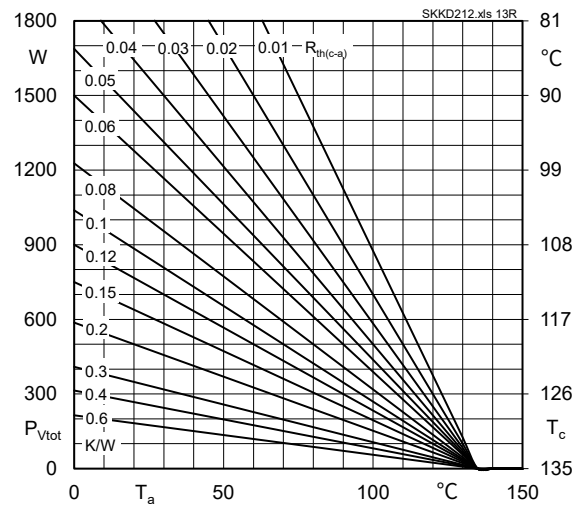


Fig. 13R: Power dissipation of three modules vs. ambient temperature

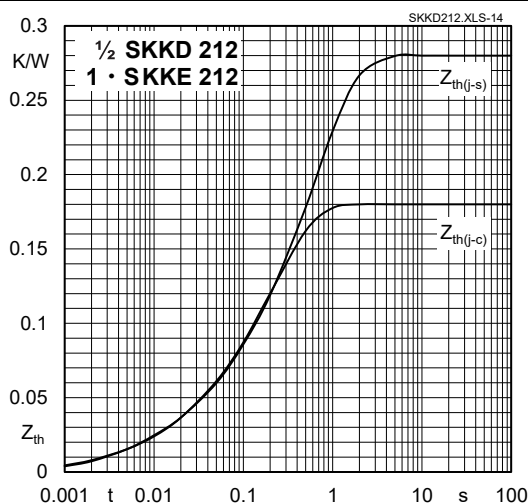


Fig. 14: Transient thermal impedance vs. time

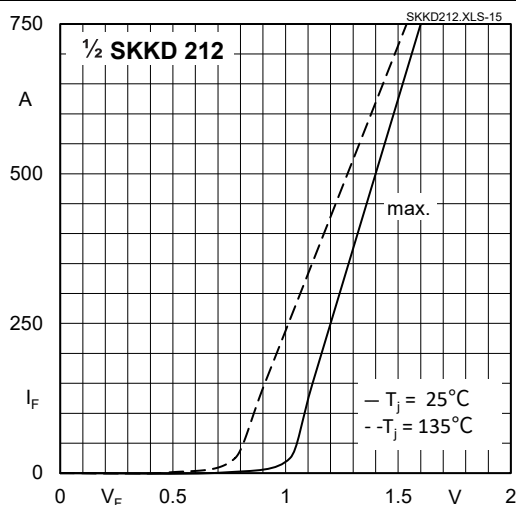


Fig. 15: Forward characteristics



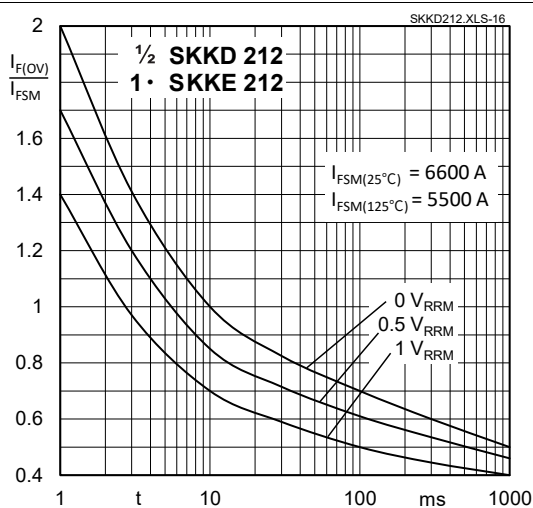


Fig. 16: Surge overload current vs. time

General tolerance ± 0.5 mm

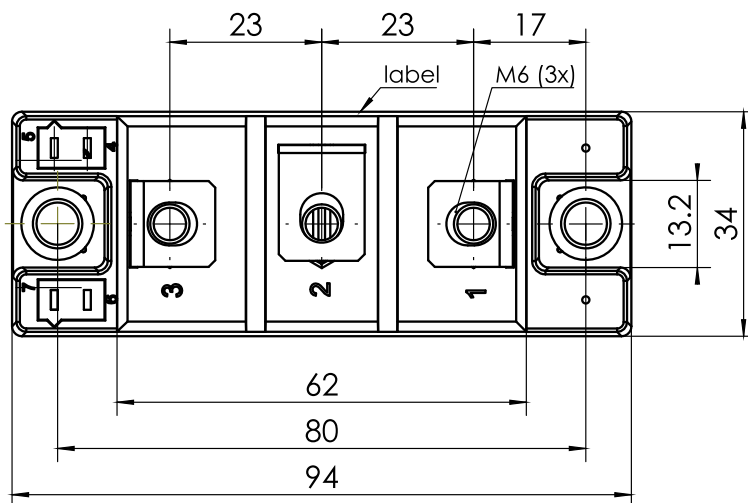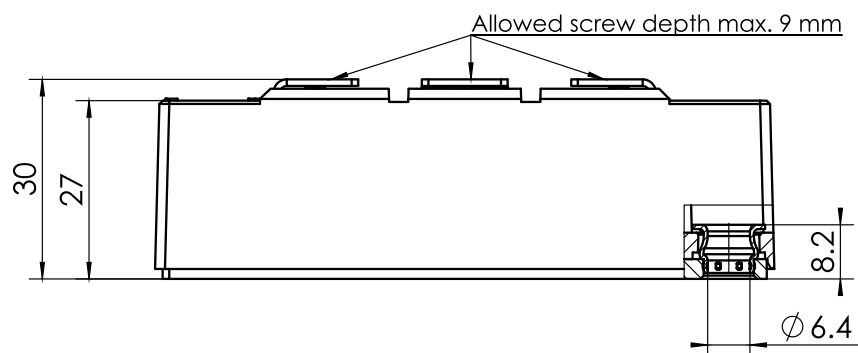

SEMIPACK 2