

General

Model GEM021JA two phase three wire electronic DIN rail active energy meter is a kind of new style two phase three wire active energy meter, it adopt micro-electronics technique, and imported large scale integrate circuit, use advanced technique of digital and SMT techniques, etc. The meter completely accord with relevant technical requirements of class 1 three phase active energy meter stipulated in international standard IEC 62053-21. It can accurate and directly measure 50Hz or 60Hz active energy consumption from two phase three wire AC electricity net. This meter has seven digits LCD displays shows the active energy consumption. It has following features: good reliability, small volume, light weight, specious nice appearance, convenient installation, etc.



41

Functions and features



- 35mm standard DIN rail installation, complying with standard DIN EN50022. Or front board installed (mounting holes center distance 63 mm), users can choose any one by themselves.
- Ten pole width (Modulus 12.5mm), complying with standard JB/T7121-1993.
- Seven digits display LCD, standard configuration 6 + 1 digits display (999999.1kWh). May select 5 + 2 digits display (Please specified when ordering).
- Standard configuration one port of pulse output passive (polarity), May select a distant port of pulse output passive (nonpolarity). And contact with all kind of AMR system conveniently, Complying with standard IEC 62053-31 and DIN 43864.
- Three LED instructions respectively power supply state (phase voltage L1 & L3) and signal of energy impulse.
- Automatic detection the direction of the flow of load current. And Instructions on individual LED.
- Single direction two components measure two phase three wire active energy consumption. It is nothing with direction of the flow of load current. Complying with standard IEC 62053-21.
- Standard configuration type S wiring (Inlet from bottom, outlet from top) for direct connect operation, we can also choose another type of wiring, and use CT (Product Configuration code is IA) and PT & CT (Product Configuration code is HA) for operation.
- Standard configuration short terminals cover, may select extension terminals cover, in order to protect to use safety. (Product Configuration code is JD).

Technical parameters

Model	Accuracy	Reference Voltage(V)	Current specifications(A)	Starting current(A)	Insulation performance
GEM021JA	Class 1	2x127	5(30)	0.02	AC voltage 4kv for 1 minute, 1.2/50us waveform impulse voltage 6kv
			10(60)	0.04	
		2x230	20(100)	0.08	

Dimension and Wiring

42

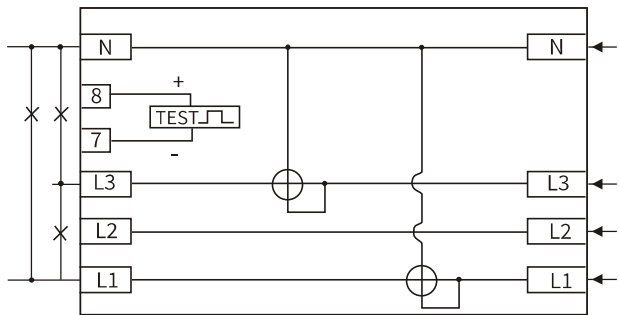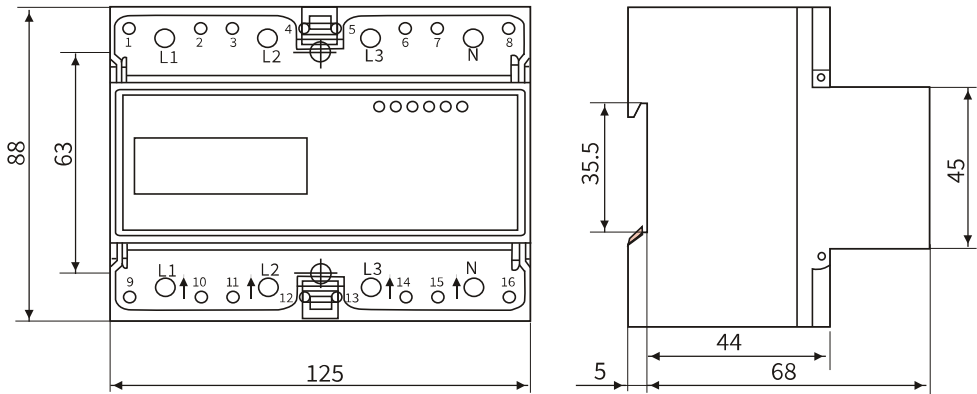

Terminal	Note
L1	L1 phase line
L2	Don't use
L3	L3 phase line
N	Netutral line (Inlet from bottom, outlet from top)
7 and 8	Port of pulse output passive