


**Model description**

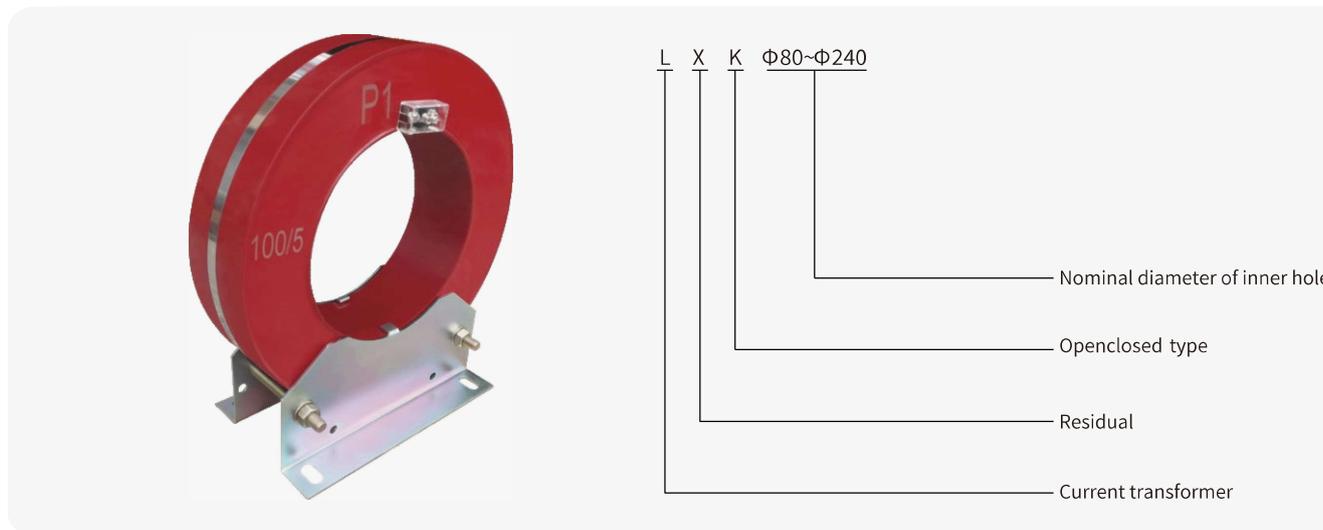

**Technical data**

LXK Φ (80、120、140、160、200、240)type technical data 1: for residual protection Table 1

Transformation ratio (A)	Relay type	Connection type of relay coll	Relay scale value	Primary residual current of relay acting (A)	Weight (kg)
60/1	DD1 1/60	Series connection	15×1	2.4-2.5	4.5
		Parallel connection	30×1		
	DD1/60	Series connection	15×2	3-5	
			30×2		
		Parallel connection	15×1	3-5	
			30×1		
Parallel connection	15×2	3-6			
	30×2				

LXK Φ (80、120、140、160、200、240) type technical data 2: mating with microcomputer protection Table 2

Transformation ratio (A)	Accuracy class	Rated output (VA)
60/1	5P10	1.0
75/1		1.5
100/1		2.5
150/1		2.5
200/1		3.75
300/1		7.5
150/1		2.0
200/1		2.5
300/1		5.0
400/1		10
500/1		12.5
600/1		15

**Overall dimension drawing**

59

