

ZW16000-200~400V

Features:

- . All diffused structure
- . High current density
- . Very low forward voltage drop
- . Ceramic housing hermetic package
- . Ultra-low thermal resistance

Electrical Characteristics And Ratings

Reverse Blocking

Device Type	V _{RRM} (1)	V _{RSM} (1)
ZW16000-02	200	300
ZW16000-04	400	450

V_{RRM} = Repetitive peak reverse voltage
 V_{RSM} = Non repetitive peak reverse voltage (2)


Repetitive peak reverse leakage current	I _{RRM}	15 mA 60 mA (3)
---	------------------	--------------------



Notes:

All ratings are specified for T_j=25 °C, unless otherwise stated

- (1) Sine half wave, f=50Hz, T_j = -40 to +170°C.
- (2) Sine half wave, Pulse width 10 msec. T_j = -40 to +170°C.
- (3) Maximum value for T_j = 170 °C.
- (4) See parameter definition below :

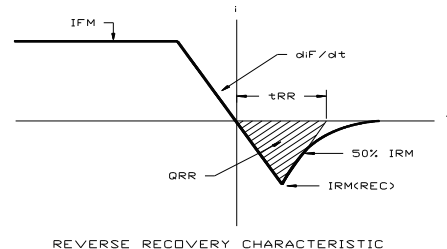

REVERSE RECOVERY CHARACTERISTIC

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	I _{F(AV)}		16000		A	Sinewave 180°, T _c =85°C
RMS forward current	I _{FRMS}		21500		A	
Peak one cycle surge (non repetitive) current	I _{FSM}		120000		A	Pulse width 10 msec, sinusoidal wave-shape, 180° conduction, T _j = 170 °C
I square t	I ² t		72000		KA ² s	Pulse width 10 msec, sinusoidal wave-shape, T _j = 170 °C
Peak forward voltage	V _{FM}		0.92		V	I _{FM} = 5000A; 25°C
Threshold voltage	V _{TO}		0.74		V	T _j = 170 °C
Slope resistance	r _T		0.015		mΩ	T _j = 170 °C
Reverse Recovery Current (4)	I _{RM(REC)}				A	I _{FM} = 1000 A; dI _F /dt = 10 A/μs;T _j max
Reverse Recovery Charge (4)	Q _{rr}				μC	I _{FM} = 1000 A; dI _F /dt = 10 A/μs;T _j max
Reverse Recovery Time (4)	t _{rr}				μs	I _{FM} = 1000 A; dI _F /dt = 10 A/μs;T _j max

* For guaranteed maximum values, contact factory

Ehermal And Mechanical Characteristics

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T _j	-40	+170		°C	
Storage temperature	T _{stg}	-40	+170		°C	
Thermal resistance - junction to case	R _{θ(j-c)}		0.004		°C/W	Double sided cooled
Thermal resistance - junction to case	R _{θ(j-c)}		0.008		°C/W	Single sided cooled
Creepage distance	D _s		8		mm	
Air breakdown distance	D _a		8		mm	
Mounting force	F		50	37	kN	
Weight	W			570	g	

* Mounting surfaces smooth, flat and greaseless

Case Outline And Dimensions

