


Model description

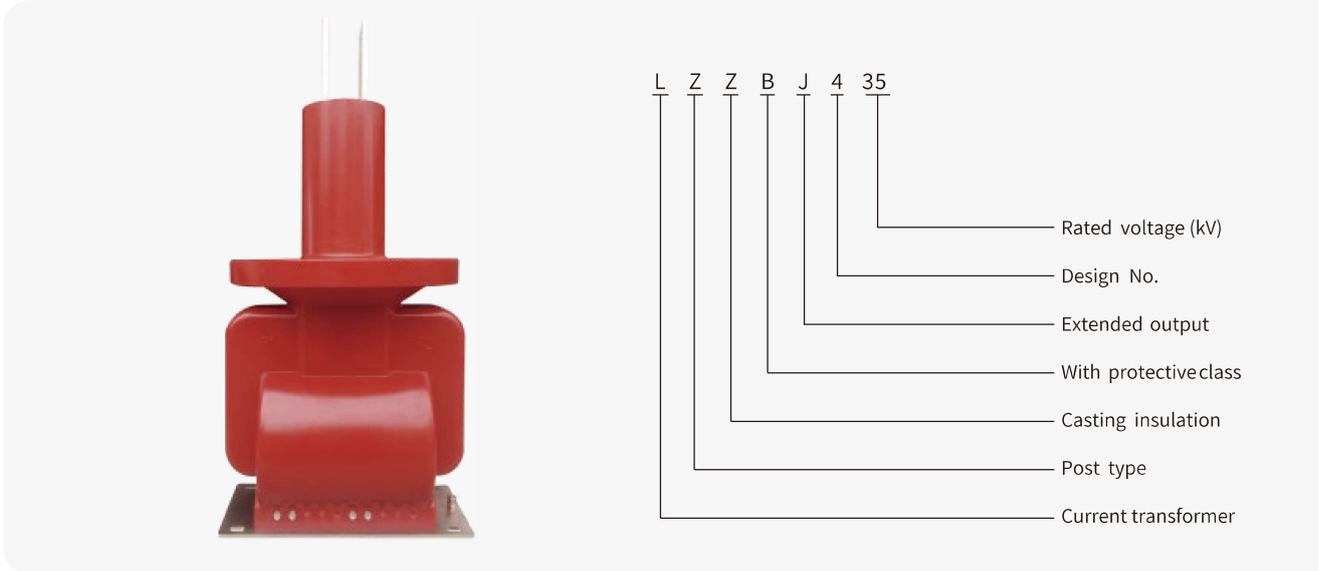

Technical data

Single transformation ratio

| Rated primary current (A) | Accuracy Combination | Rated secondary output (VA) | | | | | 1s thermal current (kA) | Rated dynamic current (kA) |
|---------------------------|---|-----------------------------|-----|-------|-------|------|-------------------------|----------------------------|
| | | 0.2 | 0.5 | 10P10 | 10P15 | 5P20 | | |
| 50、200 | 0.2/0.2/10P/10P 0.2/0.5/10P/10P 0.2/10P/10P/10P 0.5/10P/10P/10P 10P/10P/10P/10P | 20 | 40 | 50 | 40 | 30 | 90 | 300 |
| 300、400 | | | | | | | 100 | 250 |
| 500、800 | | | | | | | 50 | 100 |
| 1000、1250 | | | | | | | 56 | 110 |
| 1500、1600 | | | | | | | 75 | 110 |

Two transformation ratio

| Rated primary current (A) | Accuracy Combination | Rated secondary output (VA) | | | | | 1s thermal current (kA) | Rated dynamic current (kA) | | |
|---------------------------|---|-----------------------------|-----|-------|-------|------|-------------------------|----------------------------|----|----|
| | | 0.2 | 0.5 | 10P10 | 10P15 | 5P20 | | | | |
| 50、100 | 0.2/0.2/10P/10P 0.2/0.5/10P/10P 0.2/10P/10P/10P 0.5/10P/10P/10P 10P/10P/10P/10P | 15 | 40 | 50 | 40 | 30 | 120 | 300 | | |
| 75、150 | | | | | | | | | | |
| 100、200 | | | | | | | | | | |
| 150、300 | | | | | | | 16 | 40 | | |
| 200、400 | | | | | | | | | | |
| 300、600 | | | | | | | | | 20 | 50 |
| 400、800 | | | | | | | | | | |
| 500、1000 | | | | | | | 31.5 | 80 | | |
| 600、1200 | | | | | | | | | | |
| 750、1500 | | | | | | | | | | |
| 800、1600 | | | | | | | 20 | 40 | 50 | 40 |

Technical data

51

| Rated primary current (A) | Accuracy Combination | Rated secondary output (VA) | | | | | 1s thermal current (kA) | Rated dynamic current (kA) |
|---------------------------|---|-----------------------------|-----|-------|-------|------|-------------------------|----------------------------|
| | | 0.2 | 0.5 | 10P10 | 10P15 | 5P20 | | |
| 50、100 | 0.2/0.2/10P/10P 0.2/0.5/10P/10P 0.2/10P/10P/10P 0.5/10P/10P/10P 10P/10P/10P/10P | 15 | 40 | 50 | 40 | 30 | 120 | 300 |
| 75、150 | | | | | | | | |
| 100、200 | | | | | | | | |
| 150、300 | | | | | | | | |
| 200、400 | | | | | | | | |
| 300、600 | | 20 | 40 | 50 | 40 | 30 | 40 | 100 |
| 400、800 | | | | | | | | |
| 500、1000 | | | | | | | | |
| 600、1200 | | | | | | | | |
| 750、1500 | | | | | | | | |
| 800、1600 | | | | | | | | |

Overall dimension drawing

